



Specification

COM24H2P71ULC

2.4" - 240x320 - RGB

Spec Revision: 2.0 Revision Date: 21.02.2025

Note: This specification is subject to change without prior notice





Specification

COM24H2P71ULC

2.4" - 240 x 320 - QVGA

Spec Revision: 1.0

Revision Date: 05.02.2020

Note: This specification is subject to change without prior notice

Specifications for

Blanview TFT-LCD Monitor (2.4" QVGA 240 x RGB x 320 Portrait)

Version 1.0 (Please be sure to check the specifications latest version.)

MODEL COM24H2P71ULC

Customer's Approval
Signature:
Name:
Section:
Title:
Date:

ORTUSTECH

TOPPAN PRINTING CO.,LTD.
Electronics Division
Ortus Subdivision

Approved by

Checked by

Prepared by

M. Shibamoto

SPECIFICATIONS No. 19TLM072 Issue:Feb.5,2020 Revision History Date Jul.5,2019 Page Description Ver. Tentative issue 0.1 1.0 Feb.5.2020 First issue 3 change Change number of pages <u>A</u>×10 12 add Operating Current 20 add White Chromaticity Range Response time change Signal condision 21 add add Reliability Test 23 Packing Specifications 25 add Add item 26 add add Add item 27 add Add page 28

TOPPAN PRINTING CO., LTD.

Contents

1.	Applica	ation	• • • • • • • • • • • • • • • • • • • •	4
2.	Outline	Specifications		
	2.1	Features of the Product	• • • • • • • • • • • • • • • • • • • •	5
	2.2	Display Method	• • • • • • • • •	5
3.	Dimens	sions and Shape		
	3.1	Dimensions	• • • • • • • •	7
	3.2	Outward form	• • • • • • • •	8
	3.3	Serial No. print (S-print)	• • • • • • • •	9
4.	Pin Ass	signment	• • • • • • • • • • • • • • • • • • • •	10
		te Maximum Rating	• • • • • • • •	11
6.	Recom	mended Operating Conditions	• • • • • • • •	11
		cal Characteristics		
	7.1	DC Characteristics	• • • • • • • • •	12
	7.2	AC Characteristics		13
8.	Switchi	ng Waveform Characteristics		14
	Input T	•		
	9.1	Input Timing Characteristics		15
	9.2	Input Timing Chart		16
10.	Power	ON/OFF sequence	• • • • • • • • •	17
	LED Ci	·	• • • • • • • • •	18
12.	Charac	eteristics		
	12.1	Optical Characteristics	• • • • • • • • •	19
	12.2	Temperature Characteristics	• • • • • • • • •	20
13.	Criteria	of Judgment		
	13.1	Defective Display and Screen Quality	• • • • • • • • •	21
	13.2	Screen and Other Appearance	• • • • • • • • •	22
14.	Reliabi	lity Test	• • • • • • • • •	23
		g Specifications	• • • • • • • • •	25
16.	Handlir	ng Instruction		
	16.1	Cautions for Handling LCD panels	• • • • • • • •	26
	16.2	Precautions for Handling	• • • • • • • • •	27
	16.3	Precautions for Operation	• • • • • • • • •	27
	16.4	Storage Condition for Shipping Cartons	• • • • • • • • •	28 ,
	16.5	Precautions for Peeling off the Protective film	• • • • • • • •	29 A
	16.6	Warranty	•••••	29
ΑI	PPENDI	X	•••••	30

SPECIFICATIONS No. 19TLM072

1. Application

This Specification is applicable to 60.0mm (2.4 inch) Blanview TFT-LCD monitor for non-military use.

- TOPPAN PRINTING makes no warranty or assume no liability that use of this Product and/or any information including drawings in this Specification by Purchaser is not infringing any patent or other intellectual property rights owned by third parties, and TOPPAN PRINTING shall not grant to Purchaser any right to use any patent or other intellectual property rights owned by third parties. Since this Specification contains TOPPAN PRINTING's confidential information and copy right, Purchaser shall use them with high degree of care to prevent any unauthorized use, disclosure, duplication, publication or dissemination of TOPPAN PRINTING's confidential information and copy right.
- © If Purchaser intends to use this Products for an application which requires higher level of reliability and/or safety in functionality and/or accuracy such as transport equipment (aircraft, train, automobile, etc.), disaster-prevention/security equipment or various safety equipment, Purchaser shall consult TOPPAN PRINTING on such use in advance.
- This Product shall not be used for application which requires extremely higher level of reliability and/or safety such as aerospace equipment, telecommunication equipment for trunk lines, control equipment for nuclear facilities or life-support medical equipment.
- It must be noted as an mechaniacl design manner, especial attention in housing design to prevent arcuation/flexureor caused by stress to the LCD module shall be considered.
- TOPPAN PRINTING assumes no liability for any damage resulting from misuse, abuse, and/or miss-operation of the Product deviating from the operating conditions and precautions described in the Specification.
- © TOPPAN PRINTING is not responsible for any nonconformities and defects that are not specified in this specifications.
- © If any issue arises as to information provided in this Specification or any other information, TOPPAN PRINTING and Purchaser shall discuss them in good faith and seek solution.
- TOPPAN PRINTING assumes no liability for defects such as electrostatic discharge failure occurred during peeling off the protective film or Purchaser's assembly process.


○ This Product is compatible for RoHS(2.0) directive.

Object substance	Maximum content [ppm]
Cadmium and its compound	100
Hexavalent Chromium Compound	1000
Lead & Lead compound	1000
Mercury & Mercury compound	1000
Polybrominated biphenyl series (PBB series)	1000
Polybrominated biphenyl ether series (PBDE series)	1000
Bis(2-ethylhexyl)phthalate series(DEHP series)	1000
Butyl benzyl phthalate series(BBP series)	1000
Dibutyl phthalate series(DBP series)	1000
Diisobutyl phthalate series(DIBP series)	1000

2. Outline Specifications

2.1 Features of the Product

- 2.4" diagonal with resolution of 720[H]x320[V] dots. 240RGB x 320 pixel.
- 6-bit 262,144 color display capability.
- Single power supply operation of 3.3V.
- Timing generator [TG], Counter-electrode driving circuitry, Built-in power supply circuit.
- Long life & High bright white LED back-light.
- Blanview TFT-LCD, improved outdoor readability.

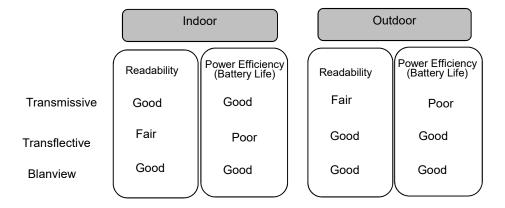

2.2 Display Method

Items	Remarks	
Display type	VA type 262,144 Colors.	
Driving method		
	Line-scanning, Non-interlace	
Dot arrangement	RGB stripe arrangement	Refer to Fig. 1
Input signal type 6-bit RGB, parallel input.		
Backlight Long life & High bright white LED.		
NTSC ratio	50%	


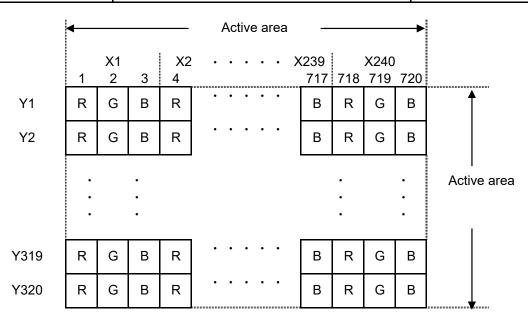


Fig. 1: Dot arrangement (FPC cable placed left)

TOPPAN PRINTING CO.,LTD.

<Features of Blanview>


- Backlight power consumption required to assure visibility. (equivalent to 3.5"QVGA)

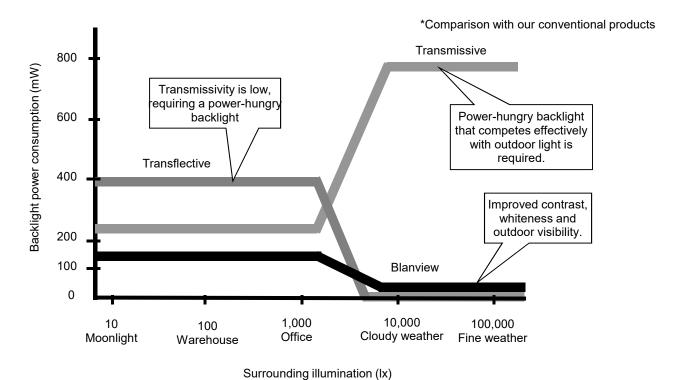

- Contrast characteristics under 100,000lx. (same condition as direct sunlight.)

With better contrast (higher contrast ratio), Blanview TFT-LCD has the best outdoor readability in three different types of TFT-LCD.

Below chart shows contrast value against panel surface brightness. (Horizontal: Panel surface brightness/ Vertical: Contrast value) LCD panel has enough outdoor readability above our Standard line. (TOPPAN PRITING criteria)

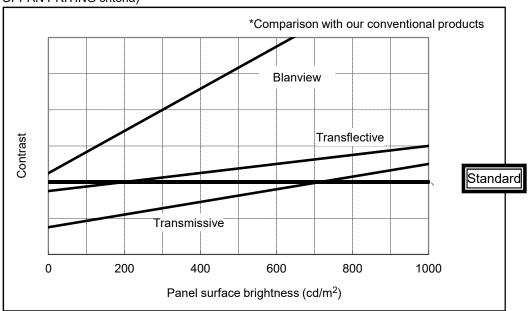


SPECIFICATIONS No. 19TLM072

Issue:Feb.5,2020

3. Dimensions and Shape

3.1 Dimensions

Items	Specifications	Unit	Remarks
Monitor outline dimensions	42.50[H] × 58.50[V] × 2.55[D]	mm	Exclude FPC cable and
			parts on FPC.
Active area	36.00[H] × 48.00[V]	mm	60.0mm diagonal
Number of dots	720[H] × 320[V]	dot	
Dot pitch	50.0[H] × 150.0[V]	μ m	
Surface hardness of the polarizer	3	Н	Load: 4.90N
Weight	13.5	g	Include FPC cable

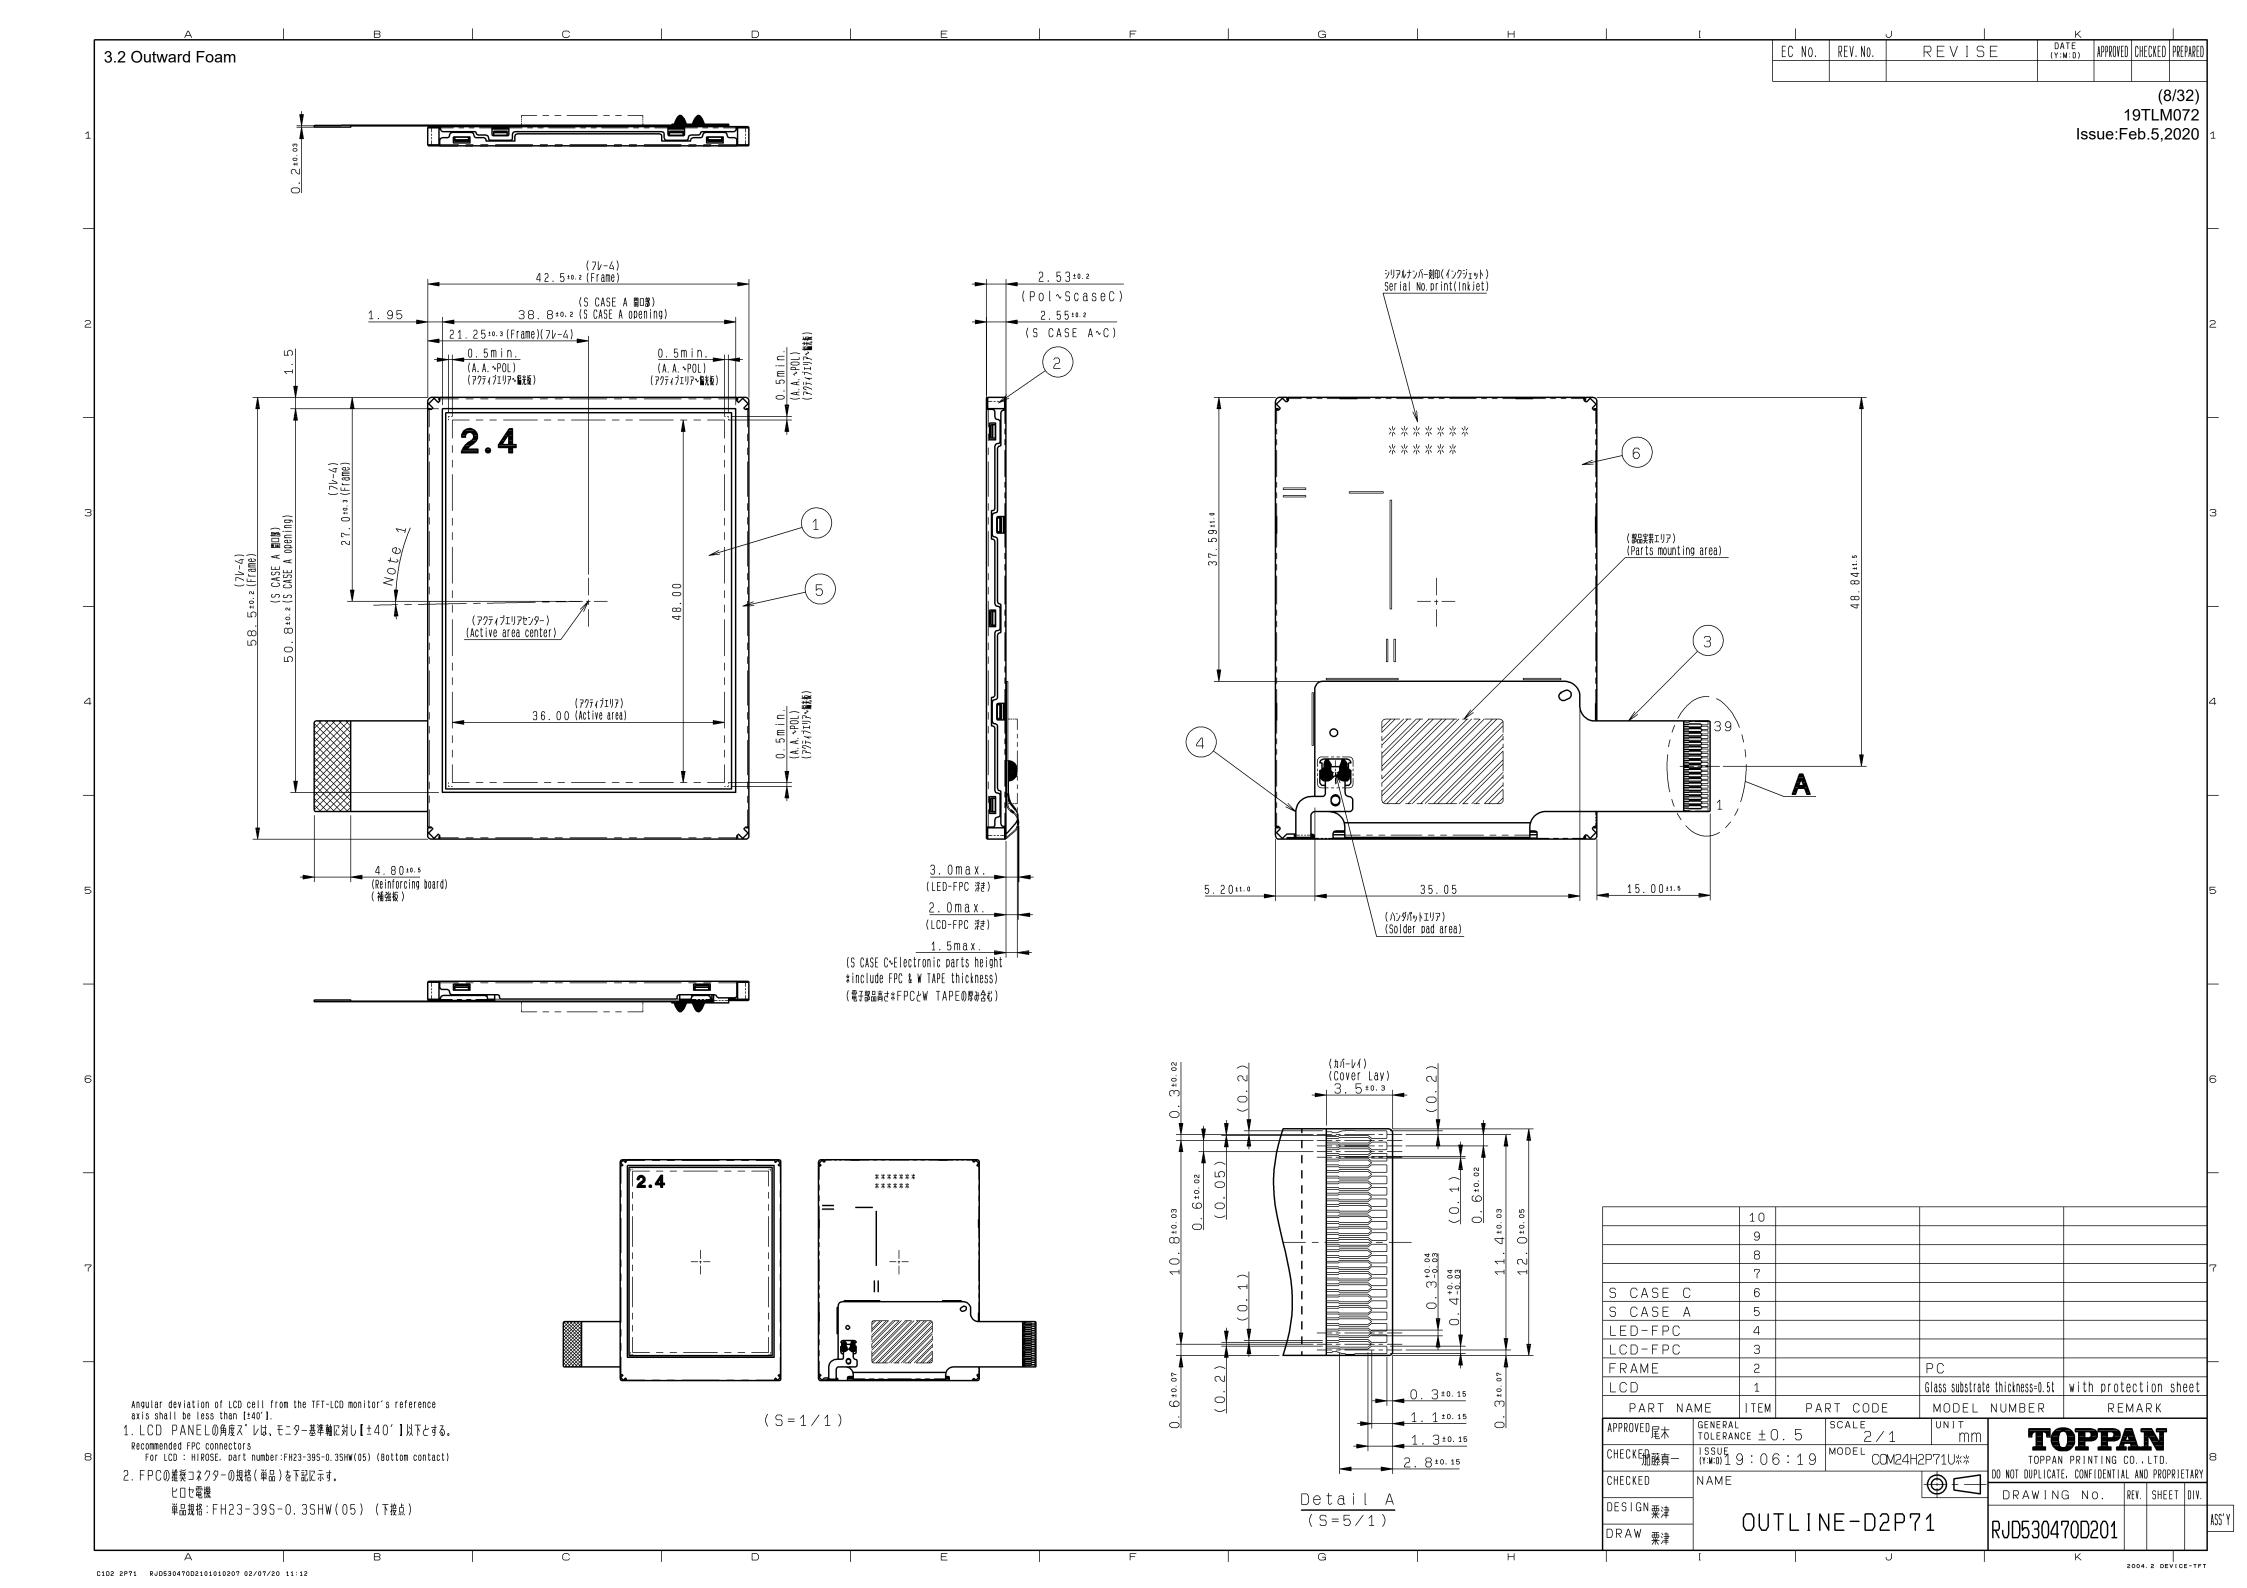

3.3 Serial No. print (S-print)

1) Display Items

S-print indicates the least significant digit of manufacture year (1digit), manufacture month with below alphabet (1letter), model code (5characters), serial number (6digits).

* Contents of Display

*	*	****	****
-	_		
а	b	С	d

	Contents of display									
а	The least significant digit of manufacture year									
b	Manufacture month Jan-A May-E Sep-I									
		Feb-B	Jun-F Oct-J							
		Mar-C	Jul-G	Nov-K						
		Apr-D	Aug-H	Dec-L						
С	Model code	24BMC (Made in Japa	an)							
		24BNC (Made in Malaysia)								
d	Serial number									

^{*} Example of indication of Serial No. print (S-print)

9J24BMC500125

means "manufactured in October 2019, 2.4" BM type, C specifications, serial number 500125"

· Made in Malaysia

9J24BNC500125

means "manufactured in October 2019, 2.4" BN type, C specifications, serial number 500125"

2) Location of Serial No. print (S-print) Refer to 3.2 "Outward form".

3)Others

Please note that it is likely to disappear with an organic solvent about the Serial print.

[·]Made in Japan

4. Pin Assignment

No.	Symbol	Functions				
1	VSS	Ground				
2	VSS	Ground				
3	VDD	Power supply				
4	VCCIO	Power supply				
5	VSS	Ground				
6	RESETB	Reset signal. When RESETB is Lo, an internal reset is performed.				
7	HSYNC	Horizontal sync signal input. (Low active)				
8	VSYNC	Vertical sync signal input. (Low active)				
9	CLK	Clock signal for data latching and internal counter of the timing controller				
10	VSS	Ground				
11	D00					
12	D01	Display data(B)				
13	D02	00h: Black				
14	D03	D00:LSB D05:MSB				
15	D04	Driver has internal gamma conversion.				
16	D05					
17	D10					
18	D11	Display data(G)				
19	D12	00h: Black				
20	D13	D10:LSB D15:MSB				
21	D14	Driver has internal gamma conversion.				
22	D15					
23	D20					
24	D21	Display data(R)				
25	D22	00h: Black				
26	D23	D20:LSB D25:MSB				
27	D24	Driver has internal gamma conversion.				
28	D25					
29	TEST1	Connect to Ground.				
30	DE	Input data effective signal. (It is effective for the period of "H")				
31	STBYB	Standby signal (Lo:Standby operation,Hi:Normal operation)				
32	TEST2	Connect to Ground.				
33	NC	OPEN				
34	NC	OPEN				
35	NC	OPEN				
36	NC	OPEN				
37	UD/LR	Up Down/Left Right Display reverse(Low or OPEN:normal, High:inversion)				
38	BLH	LED drive power source (Anode side)				
39	BLL	LED drive power source (Cathode side)				

- Recommended connector: HIROSE ELECTRIC FH23 series [FH23-39S-0.3SHW(05)]
- Please make sure to check a consistency between pin assignment in "3.2 Outward Form" and your connector pin assignment when designing your circuit.
 Inconsistency in input signal assignment may cause a malfunction.
- Since FPC cable has gold plated terminals, gilt finish contact shoe connector is recommended.

5. Absolute Maximum Rating

VSS=0V

Item	Symbol	Condition	Rating		n Rating		Unit	Applicable terminal
			MIN	MAX				
Supply voltage	VDD	Ta=25° C	-0.3	4.6	V	VDD		
Supply voltage	VCCIO		-0.3	4.6	V	VCCIO		
Input voltage for logic	VI		-0.3	VCCIO+0.3	V	Note 1		
LED forward current	IL	Ta = 25° C	_	35.0	mA	BLH - BLL		
		Ta = 85° C	_	8.5				
Storage temperature range	Tstg		-40	95	°C			
Storage humidity range	Hstg	Non condensing in an environmental moisture at or less than 40 ° C90%RH						

Note 1: Applicable for RESETB,STBYB,TEST1,TEST2,CLK,HSYNC,VSYNC,DE,D[25:20],D[15:10],D[05:00],UD/LR

6. Recommended Operating Conditions

VSS=0V

Item	Symbol	Condition	Rating		Unit	Applicable terminal	
			MIN	TYP	MAX		
Supply voltage	VDD		3.0	3.3	3.6	V	VDD
Supply voltage	VCCIO		1.7	3.3	3.6	V	VCCIO
Input voltage for logic	VI		0	_	VCCIO	V	Note 1
Operational temperature range Note 2	Тор	Note 3	-30	25	85	°C	Surface of panel
Operating humidity range	Нор	Ta ≦ 40°C	20	_	85	%	
		Ta > 40°C	environme	condensing ntal moistur n 40° C85%	e at or less		

Note 1: Applicable for RESETB,STBYB,TEST1,TEST2,CLK,HSYNC,VSYNC,DE,D[25:20],D[15:10],D[05:00],UD/LR

Note 2: This monitor is operatable in this temperature range. With regard to optical characteristics, refer to Item "12. CHARACTERISTICS".

Note 3: Acceptable Forward Current to LED is up to 8.5mA, when Ta=+85 °C. Do not exceed Allowable Forward Current shown on the chart below.


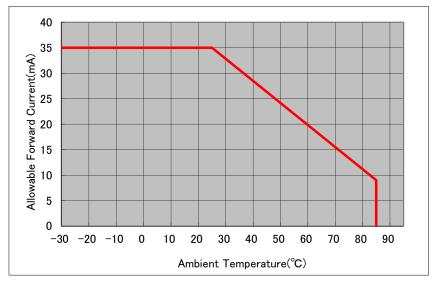


Fig. 2: Allowable Forward Current

TOPPAN PRINTING CO.,LTD.

7. Electrilcal Characteristics



7.1 DC Characteristics

(Unless otherwise noted, Ta=25°C,VDD=3.3V,VCCIO=3.3V,VSS=0V)

Item	Symbol	Condition	Rating		Unit	Applicable terminals	
			MIN	TYP	MAX		
Input Signal Voltage	VIH	VCCIO = 1.7~3.6V	0.8×VCCIO	_	VCCIO	V	Note 1
	VIL		0	_	0.2×VCCIO	V	
Operating Current	IDD	fCLK=6.04MHz Color bar display	_	14.0	28.0	mA	VDD
	ICCIO		-	185	370	uA	VCCIO

Note 1: Applicable for RESETB,STBYB,TEST1,TEST2,CLK,HSYNC,VSYNC,DE,D[25:20],D[15:10],D[05:00],UD/LR

7.1.2 Backlight


Item	Symbol	Condition		Rating		Unit	Applicable terminal
			MIN	TYP	MAX		
Forward current	IL25	Ta=25° C	_	7.5	35.0	mA	BLH - BLL
	IL85	Ta=85° C	_	_	8.5	mA	
Forward voltage	VL	Ta=25° C, IL=7.5mA	_	5.4	5.7	V	(Reference Value)
Estimated Life	LL	Ta=25° C, IL=7.5mA	_	50,000	_	hr	
of LED		Note2					

- Note2: The lifetime of the LED is defined as a period till the brightness of the LED decreases to the half of its initial value.
 - This figure is given as a reference purpose only, and not as a guarantee.
 - This figure is estimated for an LED operating alone. As the performance of an LED may differ when assembled as a monitor together with a TFT panel due to different environmental temperature.
 - Estimated lifetime could vary on a different temperature and usually higher temperature could reduce the life significantly.

7.2 AC Characteristics

(Unless otherwise noted, Ta=25°C,VDD=3.3V,VCCIO=3.3V,VSS=0V)

Item	Symbol	Symbol Condition		Rating	· · · · · · · · · · · · · · · · · · ·	Unit	Applicable terminal
item	Symbol			TYP	MAX	Offic	Applicable terrilinal
CLK pulse High duty	PWH		40%	-	60%	1/fCLK	CLK
CLK pulse Low duty	PWL		40%	-	60%	1/fCLK	
CLK rise time	tr		-	-	20%	1/fCLK	
CLK fall time	tf		-	-	20%	1/fCLK	
Data setup time	tds		5	-	-	ns	CLK,DE
Data hold time	tdh		5	-	-	ns	D[05:00],D[15:10]
DE setup time	tdes		5	-	-	ns	D[25:20]
DE hold time	tdeh		5	-	-	ns	
HSYNC setup time	ths		5	-	-	ns	CLK,VSYNC,HSYNC
HSYNC hold time	thh		5	-	-	ns	
VSYNC setup time	tvhs		5	-	-	ns	
VSYNC hold time	tvhh		5	-	-	ns	

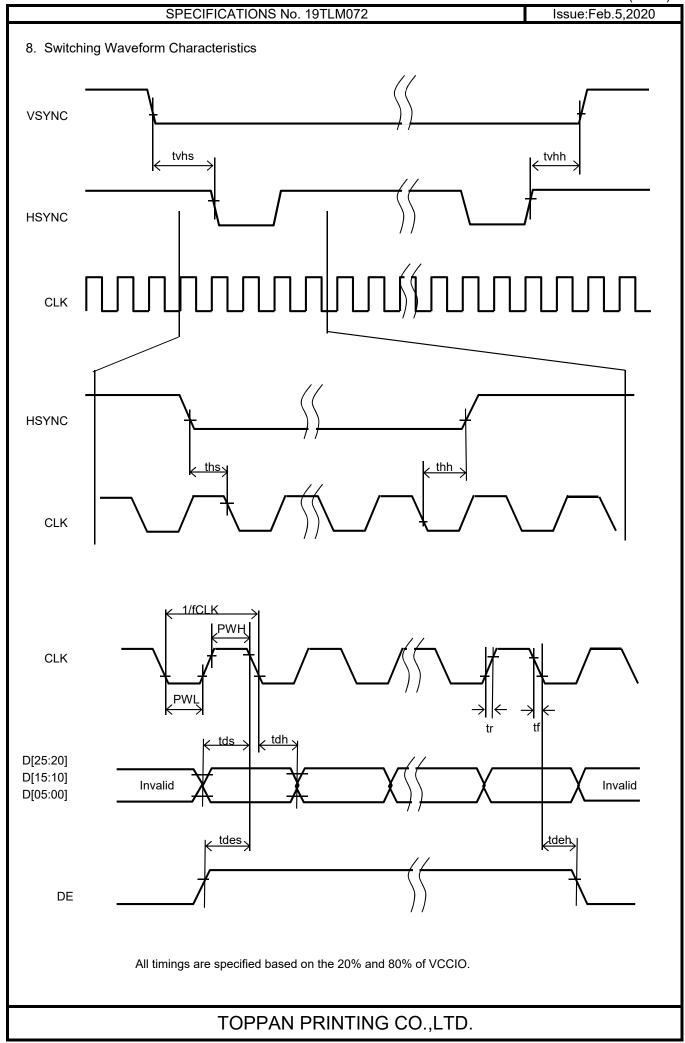



9. Input Timing


9.1 Input Timing Characteristics

(Unless otherwise noted, Ta=25 °C,VDD=3.3V,VCCIO=3.3V,VSS=0V)

Item	Symbol	Rating			Unit	Applicable terminal
item	Syllibol	MIN TYP MAX] "	Applicable terrilinal	
CLK frequency	fCLK	4.77	6.04	8.99	MHz	CLK
VSYNC frequency	fVSYNC	54	60	66	Hz	VSYNC
Vertical period	VP	326	340	370	Н	VSYNC
VSYNC pulse width	tVSW	1	2	6	Н	VSYNC
Vertical back-porch	tVBP	1	10	31	Н	VSYNC, DE
Vertical front-porch	tVFP	5	10	19	Н	VSYNC, DE
Vertical valid data	Vdisp		320		Н	VSYNC, DE
Horizontal period	HP	271	296	368	CLK	HSYNC
HSYNC pulse width	tHSW	15	20	100	CLK	HSYNC
Horizontal back-porch	tHBP	16	40	100	CLK	HSYNC, DE
Horizontal front-porch	tHFP	15	16	28	CLK	HSYNC, DE
Horizontal DE period	Hde		240		CLK	HSYNC, DE

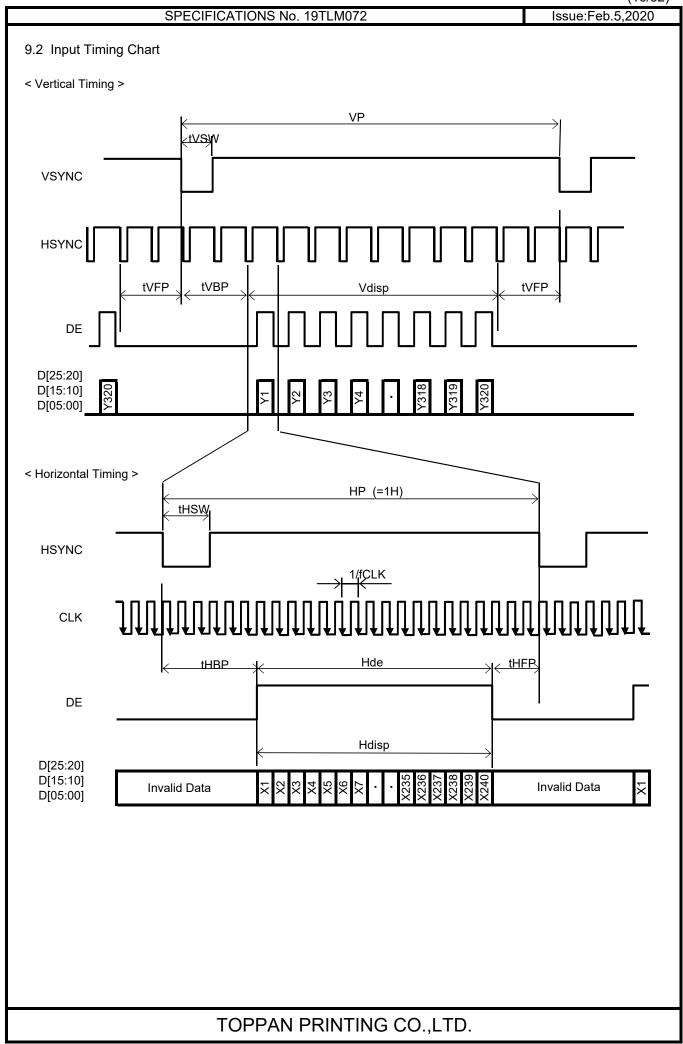

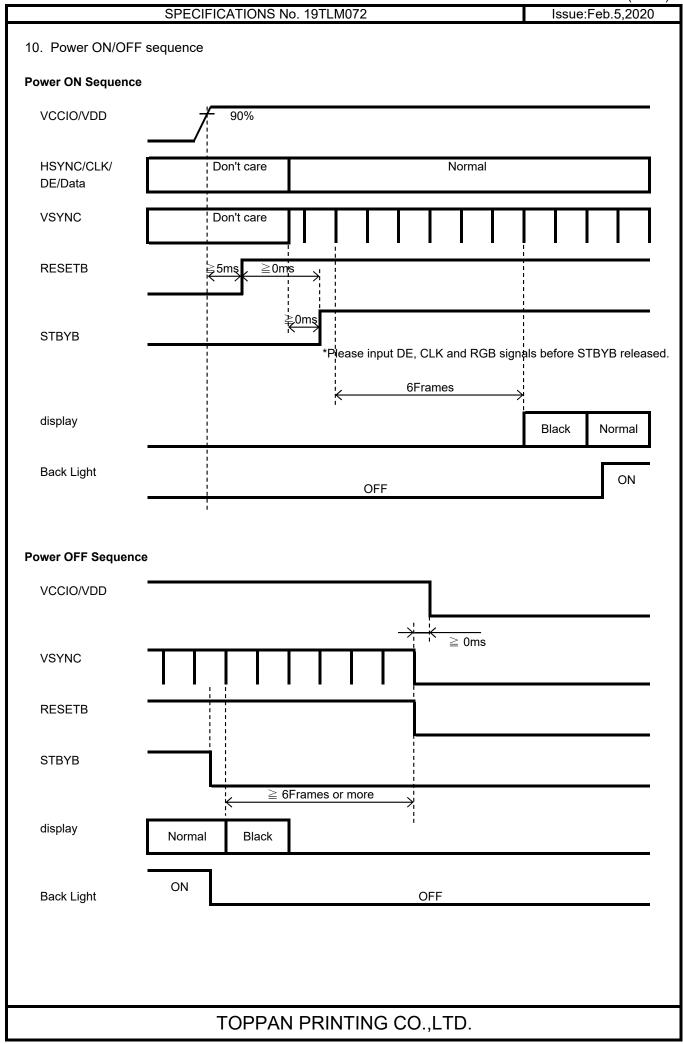

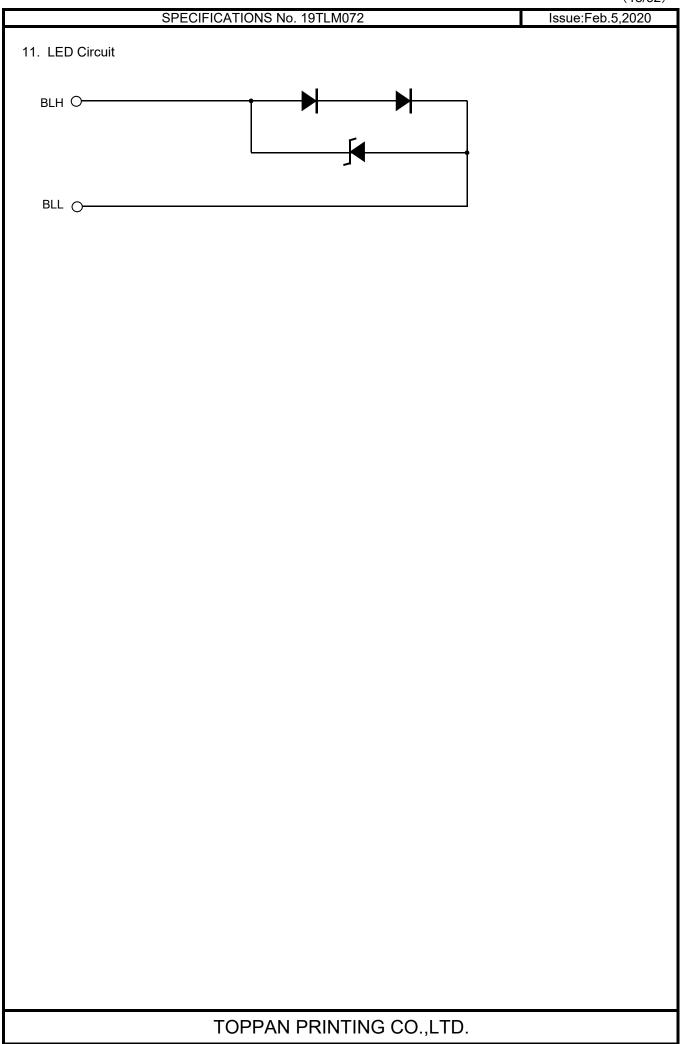

12. Characteristics

12.1 Optical Characteristics

< Measurement Condition >

Measuring instruments: CS2000 (KONICA MINOLTA), LCD7200 (OTSUKA ELECTRONICS),

EZcontrast160D (ELDIM)

Driving condition: VDD = 3.3V, VSS = 0V


Optimized VCOMDC

Backlight: IL=7.5mA Measured temperature: Ta=25° C

	Item	Symbol	Condition	MIN	TYP	MAX	Unit	Note No.	Remark
Response time	Rise time + Fall time	TON	[Data]= 00h→3Fh [Data]= 3Fh→00h	_	50	100	ms	1	
Contrast ratio	Backlight ON	CR	[Data]= 3Fh / 00h	400	800	I		2	
Conf	Backlight OFF			_	2	I			
0	Left	θL	[Data]=	80		1	deg	3	
Viewing angle	Right	θR	3Fh / 00h	80			deg		
/ie/	Up	φU	CR≧10	80		-	deg		
	Down	φD		80	_	_	deg		
White	e Chromaticity	Х	[Data]=3Fh	White chromaticity range				4	
VVIIIC	Officiations	У							
	Burn-in			No noticeable burn-in image shall be observed after 2 hours of window pattern display.		5			
Center brightness		[Data]=3Fh	180	270	_	cd/m ²	6	IL=7.5mA	
Brightness distribution		on	[Data]=3Fh	70	_	-	%	7	

^{*} Note number 1 to 7: Refer to the APPENDIX of "Reference Method for Measuring Optical Characteristics".



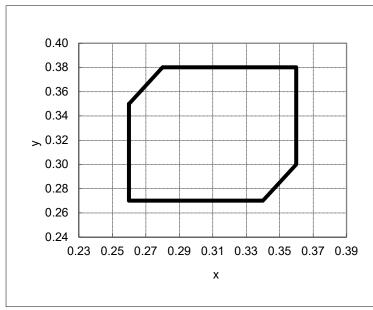

[White Chromaticity Range]

Х	у
0.26	0.35
0.26	0.27
0.34	0.27
0.36	0.30
0.36	0.38
0.28	0.38

White Chromaticity Range

12.2 Temperature Characteristics

< Measurement Condition >

Measuring instruments: CS2000 (KONICA MINOLTA), LCD7200(OTSUKA ELECTRONICS)

Driving condition: VDD = 3.3V, VSS = 0V

Optimized VCOMDC

Backlight: IL=7.5mA

	Item		Symbol		Specification		Remark
	item		Syllibol	MIN	TYP	MAX	
	Contrast ratio		CR	200	-	1	Ta=-30°C Backlight ON
	Contrast i	Contrast fatio		200	1	1	Ta=85°C Backlight ON
] د	Response time	Rise time +	TON +	1	1500ms	2200ms	Ta=-30°C
	Response ume	Fall time	TOFF	1	40ms	80ms	Ta=85°C
	Display Quality			No noticeable display defect or ununiformity should be observed.			

SPECIFICATIONS No. 19TLM072

13. Criteria of Judgment




A 13.1 Defective Display and Screen Quality

Test Condition: Observed TFT-LCD monitor from front during operation with the following conditions

Driving Signal Raster Patter (RGB, white, black)

[Data]:00h,25h,3Fh(3steps) Signal condition

Observation distance 30 cm 200 to 350 lx Illuminance Backlight IL=7.5mA



D	Defect item Defect content		Defect content	Criteria
	Line defect	Black, white or colo	r line, 3 or more neighboring defective dots	Not exists
Quality		TFT or CF, or dust i	on dot-by-dot base due to defective is counted as dot defect	Refer to table 1
Display	Dot defect	Low bright dot: Visi	r dot) ble through 2% ND filter at [Data]=00h ible through 5% ND filter at [Data]=00h ark through white display at [Data]=25h	
		Invisible through 5%	6 ND filter at [Data]=00h	Acceptable
	Dirt	Uneven brightness	(white stain, black stain etc)	Invisible through 5% ND filter at Black screen. Invisible through 1% ND filter at other screen.
lity		Point-like	0.25mm< φ	N=0
Quality	Foreign		0.20mm< φ ≦0.25mm	N≦2
u	Foreign particle		φ ≦0.20mm	Acceptable
Screen	particio	Liner	3.0mm <length 0.08mm<width<="" and="" td=""><td>N=0</td></length>	N=0
Sc			length≦3.0mm or width≦0.08mm	Acceptable
	Others			Use boundary sample
	0010			for judgment when necessary

 $\varphi(mm)$: Average diameter = (major axis + minor axis)/2 Permissible number: N

Table 1

Area	High bright dot	Low bright dot	Dark dot	Total	Criteria
Α	0	2	2	3	Permissible distance between same color bright dots (includes neighboring dots): 3 mm or more
В	2	4	4	5	Permissible distance between same color high bright dots (includes neighboring dots): 5 mm or more
Total	2	4	4	5	

SPECIFICATIONS No. 19TLM072

Issue:Feb.5,2020

13.2 Screen and Other Appearance

Testing conditions

Observation distance 30cm

Illuminance 1200~2000 lx


	Item	Criteria	Remark
	Flaw	Ignore invisible defect when the backlight is on.	Applicable area:
zer	Stain		Active area only
Polarizer	Bubble		(Refer to the section
Pol	Dust		3.2 "Outward form")
	Dent		
	S-case	No functional defect occurs	
	FPC cable	No functional defect occurs	

SPECIFICATIONS No. 19TLM072 Issue:Feb.5,2020

A 14. Reliability Test

	Reliability rest	Г	
	Test item	Test condition	number of failures
			/number of examinations
	High temperature storage	Ta=95° C 500hrs	0/3
	Low temperature storage	Ta=-40° C 500hrs	0/3
	High temperature & high	Ta=60° C, RH=90% 500hrs	0/3
	humidity storage	non condensing	
tes	High temperature operation	Tp=85° C 500hrs	0/3
Durability test	Low temperature operation	Tp=-30° C 500hrs	0/3
abil	Lligh town 9 humid aparation	Tp=40°C, RH=90% 500hrs	0/3
Jur	High temp & humid operation	non condensing ×	
"	Thermal shock storage	-40←→95° C(30min/30min) 100 cycles	0/3
	<u> </u>	Xenon Blackpanel 63±3°C non-shower	0/3
	Lightfastness	$450\text{W/m}^2(300\sim700\text{nm})$ non-operating	
	· ·	Integral dose 800MJ/m ²	
		Confirms to EIAJ ED-4701/300	0/3
	Electrostatic discharge test	C=200pF,R=0Ω,V=±200V	
st	(Non operation)	Each 3 times of discharge on and power supply	
Ė	, ,	and other terminals.	
Vechanical environmental test		C=250pF, R=100Ω, V=±12kV	0/3
шe	Surface discharge test	Each 5 times of discharge in both polarities	0, 0
õ	(Non operation)	on the center of screen with the case grounded.	
ī		Total amplitude 1.5mm, f=10 ~55Hz, X,Y,Z	0/3
<u>e</u>	Vibration test	directions for each 2 hours	0/ 0
Jic .		Use TOPPAN PRINTING original jig	0/3
hai		(see next page)and make an impact with	0/ 3
/lec	Impact test	peak acceleration of 1000m/s2 for 6 msec with	
-	impact test	1:	
		half sine-curve at 3 times to each X, Y, Z directions	
-		in conformance with JIS 60068-2-27-2011.	0 (4 1:
est	Daalda a dhaatian aan 11	Acceleration of 19.6m/s ² with frequency of	0 ∕ 1 packing
g te	Packing vibration-proof test	10→55→10Hz, X,Y, Zdirection for each	
Ä		30 minutes	
Packing test	Packing drop test	Drop from 75cm high.	0 ∕ 1 packing
		1 time to each 6 surfaces, 3 edges, 1 corner	

% The profile of high temperature/humidity storage and High Temperature/humidity operation (Pure water of over 10M Ω ·cm shall be used.)

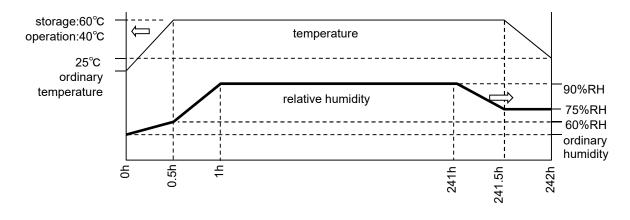


Reliability Criteria

Measure the parameters after leaving the monitor at the ordinary temperature for 24 hours or more after the test completion.


item	Standard	Remark
Display quality	No visible abnormality shall be seen.	As criteria of
		"13 Criteria of Judgment".
Contrast ratio	200 or more	Backlight ON

TOPPAN PRINTING Original Jig

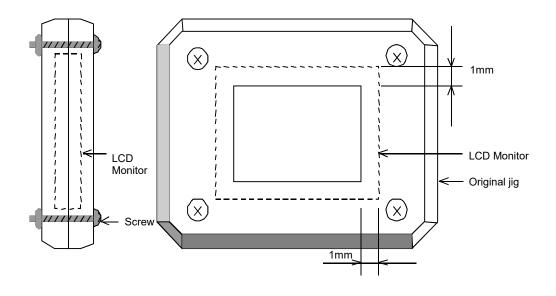






A 15. Packing Specifications

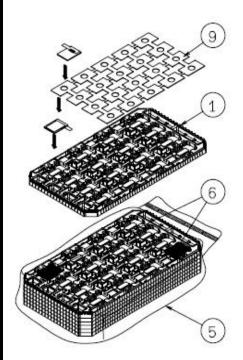

- Step1. Each lower products are to be placed in one of the cut-outs of the tray with the LCD surface facing upward, and foam-sheet is put on products.
 - •Upper products are to be placed with the LCD surface facing downward.
- Step2. Trays be in a stack of 5.
 - •One empty tray is to be put on the top of stack of 5 packed trays.
- Step3. •2 packs of moisture absorbers are to be placed on the top tray as shown in the drawing.
 - Put piled trays into a sealing bag.
- Step4. •Vacuum and seal the sealing bag with the vacuum sealing machine.
- Step5. The piled trays are to be wrapped with a bubble cushioning sheet., and to be fixed with adhesive tape.
- Step6. •A corrugated board is to be placed in the bottom of an outer carton.
 - •The wrapped trays are to be put on the corrugated board in the outer carton.
- Step7. The outer carton is to be sealed in H-shape with packing tape as shown in the drawing.
 - •The model number, quantity of products, and shipping date are to be printed on the 2 opposite sides of the outer carton with black ink.
 - In necessary, shipping labels or impression markings are to be put on the outer carton.
- Step8. •The outer carton is to be inserted into a extra outer carton with same orientation.
 - •The extra outer carton is to be sealed H-shape with packing tape as shown in the drawing.
- Step9. •The model number, quantity of products, and shipping date are to be printed on the 2 opposite sides of the extra outer carton with black ink.
 - In necessary, shipping labels or impression markings are to be put on the extra outer carton.







	Packing item name	Spec.,Material
1	TRAY	A-PET
2	B SHEET A	Anti-static air babble sheet
3	INNER BOARD	Corrugated cardboard
4	OUTER CARTON	Corrugated cardboard
5	SEALING BAG	
6	Drier	Moisture absorber
7	EXTRA OUTER CARTON	Corrugated cardboard
8	Packing tape	
8	FOAM SHEET	Anti-static polyethilene

Dimension of extra outer carton				
D : Approx.	(337mm)			
W: Approx.	(618mm)			
H: Approx.	(179mm)			
Quantity of products packed	in one carton:	200		
Gross weight : Approx.	5.5Kg			

SPECIFICATIONS No. 19TLM072

16. Handling Instruction

16.1 Cautions for Handling LCD panels



Caution

- (1) Do not make an impact on the LCD panel glass because it may break and you may get injured from it.
- (2) If the glass breaks, do not touch it with bare hands.
 (Fragment of broken glass may stick you or you cut yourself on it.
- (3) If you get injured, receive adequate first aid and consult a medial doctor.
- (4) Do not let liquid crystal get into your mouth.
 (If the LCD panel glass breaks, try not let liquid crystal get into your mouth even toxic property of liquid crystal has not been confirmed.
- (5) If liquid crystal adheres, rinse it out thoroughly.
 (If liquid crystal adheres to your cloth or skin, wipe it off with rubbing alcohol or wash it thoroughly with soap. If liquid crystal gets into eyes, rinse it with clean water for at least 15 minutes and consult an eye doctor.
- (6) If you scrap this products, follow a disposal standard of industrial waste that is legally valid in the community, country or territory where you reside.
- (7) Do not connect or disconnect this product while its application products is powered on.
- (8) Do not attempt to disassemble or modify this product as it is precision component.
- (9) If a part of soldering part has been exposed, and avoid contact (short-circuit) with a metallic part of the case etc. about FPC of this model, please. Please insulate it with the insulating tape etc. if necessary. The defective operation is caused, and there is a possibility to generation of heat and the ignition.
- (10) Since excess current protection circuit is not built in this TFT module, there is the possibility that LCD module or peripheral circuit become feverish and burned in case abnoramal operation is generated. We recommend you to add excess current protection circuit to power supply.



- (11) The devices on the FPC are damageable to electrostatic discharge, because the terminals of the devices are exposed.
 - Wear grounded wrist-straps and use electrostatic neutralization blowers to prevent static charge and discharge when handling the TFT monitors.
 - Designate an appropriate operating area, and set equipment, tools, and machines properly when handling this product.



This mark is used to indicate a precaution or an instruction which, if not correctly observed, may result in bodily injury, or material damages alone.

16.2 Precautions for Handling

- Wear finger tips at incoming inspection and for handling the TFT monitors to keep display quality and keep the working area clean.
 Do not touch the surface of the monitor as it is easily scratched.
- Wear grounded wrist-straps and use electrostatic neutralization blowers to prevent static charge and discharge when handling the TFT monitors as the LED in this TFT monitors is damageable to electrostatic discharge. Designate an appropriate operating area, and set equipment, tools, and machines properly when handling this product.
- Avoid strong mechanical shock including knocking, hitting or dropping to the TFT monitors for protecting their glass parts. Do not use the TFT monitors that have been experienced dropping or strong mechanical shock.
- 4) Do not use or storage the TFT monitors at high temperature and high humidity environment.

 Particularly, never use or storage the TFT monitors at a location where condensation builds up.
- Avoid using and storing TFT monitors at a location where they are exposed to direct sunlight or ultraviolet rays to prevent the LCD panels from deterioration by ultraviolet rays.
- Do not stain or damage the contacts of the FPC cable .
 FPC cable needs to be inserted until it can reach to the end of connector slot.
 During insertion, make sure to keep the cable in a horizontal position to avoid an oblique insertion.
 Otherwise, it may cause poor contact or deteriorate reliability of the FPC cable.
- 7) The FPC cable is a design very weak to the bend and the pull as it is fixed with the tape. Do not bend or pull the FPC cable or carry the TFT monitor by holding the FPC cable.
- Peel off the protective film on the TFT monitors during mounting process. Refer to the section 16.5 on how to peel off the protective film. We are not responsible for electrostatic discharge failures or other defects occur when peeling off the protective film.



 Please make it to the structure to suppress surroundings of the front polarizer for the display irregularity prevention.

16.3 Precautions for Operation

- 1) Since this TFT monitors are not equipped with light shielding for the driver IC, do not expose the driver IC to strong lights during operation as it may cause functional failures.
- In case of powering up or powering off this LCD module, be sure to comply the sequence as instructed in this specification.
- 3) Do not plug in or out the FPC cable while power supply is switch on. Plug the FPC cable in and out while power supply is switched off.
- 4) Do not operate the TFT monitors in the strong magnetic field. It may break the TFT monitors.
- 5) Do not display a fixed image on the screen for a long time. Use a screen-saver or other measures to avoid a fixed image displayed on the screen for a long time. Otherwise, it may cause burn-in image on the screen due the characteristics of liquid crystal.

SPECIFICATIONS No. 19TLM072







A 16.4 Storage Condition for Shipping Cartons

Storage environment

· Temperature 0 to 40°C Humidity 60%RH or less

No-condensing occurs under low temperature with high humidity condition.

Atmosphere No poisonous gas that can erode electronic components and/or

wiring materials should be detected.

Time period 1 year

To prevent damages caused by static electricity, anti-static precautionary measures Unpacking

(e.g. earthing, anti-static mat) should be implemented.

Maximum piling up 7 cartons

*Conditions to storage after unpacking

Storage environment

· Temperature 0 to 40°C Humidity 60%RH or less

No-condensing occurs under low temperature with high humidity condition.

Atmosphere No poisonous gas that can erode electronic components and/or

wiring materials should be detected.

Time period 1 year (Shelf life)

Others Keep/ store away from direct sunlight

Storage goods on original tray made by ORTUS.

16.5 Precautions for Peeling off the Protective film

The followings work environment and work method are recommended to prevent the TFT monitors from static damage or adhesion of dust when peeling off the protective films.


A) Work Environment

- a) Humidity: 50 to 70 %RH, Temperature15 to 27 °C
- b) Operators should wear conductive shoes, conductive clothes, conductive finger tips and grounded wrist-straps. Anti-static treatment should be implemented to work area's floor.
- c) Use a room shielded against outside dust with sticky floor mat laid at the entrance to eliminate dirt.

B) Work Method

The following procedures should taken to prevent the driver ICs from charging and discharging.

- a) Use an electrostatic neutralization blower to blow air on the TFT monitors to
 its lower right when the LCD-FPC cable is facing to the leftside.
 Optimize direction of the blowing air and the distance between the TFT monitors
 and the electrostatic neutralization blower.
- b) Put an adhesive tape (Scotch tape, etc) at the lower right corner area of the protective film to prevent scratch on surface of TFT monitors.
- c) Peel off the adhesive tape slowly (spending more than 2 secs to complete) by pulling it to opposite direction.

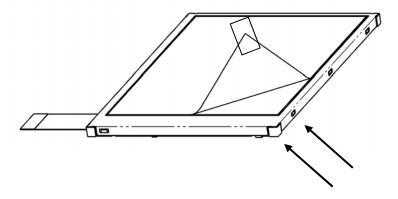

Direction of blowing air (Optimize air direction and the distance)

16.6 Warranty

TOPPAN PRINTING is only liable to defective goods which is stored and used under the condition complying with this specifications and returned within 1 (one) year.

Warranty caused by manufacturing defect shall be conducted by replacement of goods or refundment at unit price.

APPENDIX

Reference Method for Measuring Optical Characteristics and Performance

1. Measurement Condition (Backlight ON)


Measuring instruments: CS2000 (KONICA MINOLTA), LCD7200(OTSUKA ELECTRONICS), EZcontrast160D (ELDIM)

Driving condition: Refer to the section "Optical Characteristics"

Measured temperature: 25°C unless specified

Measurement system: See the chart below. The luminance meter is placed on the normal line of measurement system.

Measurement point: At the center of the screen unless otherwise specified

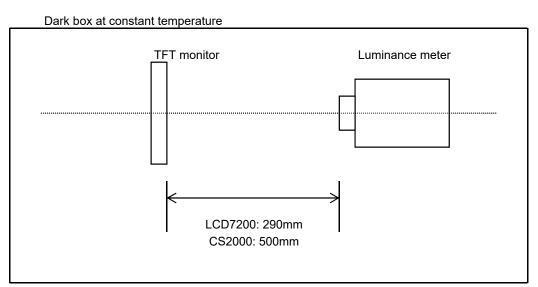


Measurement is made after 30 minutes of lighting of the backlight.

Measurement point: At the center point of the screen

Brightness distribution: 9 points shown in the following drawing.

<Portrait model>



Dimensional ratio of active area


Backlight IL=7.5mA

Measurement Condition (Contrast ratio Backlight OFF only)

Measuring instruments: LCD7200(OTSUKA ELECTRONICS),Ring Light(40,000 lx,φ58)

Driving condition: Refer to the section "Optical Characteristics"

Measurement system: 25°C unless specified
Measurement system: See the chart below.
Measurement point: At the center of the screen.

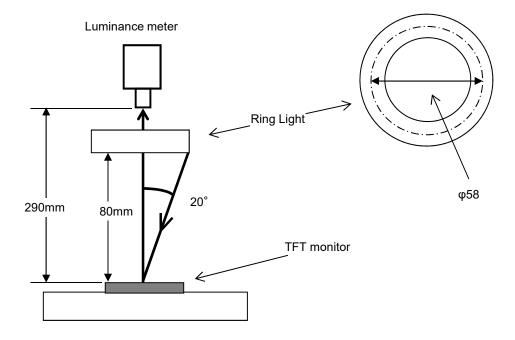

		SPECIFICATIONS No. 19TLM072		Issue:Feb.5,
	41 1			
est Me	1	T	T	I 5 .
Notice	Item	Test method	Measuring	Remark
		Management of the state of the	instrument	D
	Response	Measure output signal waveform by the luminance	LCD7200	Black display
	time	meter when raster of window pattern is changed from		[Data]=00h
		white to black and from black to white.		White display
				[Data]=3Fh
		NA 11		TON
		White Black White		Rise time
				TOFF
		\\\\\\\\\\\\\\\\\\\\\\\\\\\\\\\\\\\\\\		TOFF
		White		Fall time
		100%		
		l \		
		90%		
		10%		
		0%		
		Black		
		TON TOFF		
2	Contrast ratio	Measure maximum luminance Y1([Data]=3Fh) and	CS2000	Backlight ON
_		minimum luminance Y2([Data]=00h) at the center of	LCD7200	Backlight OFF
		the screen by displaying raster or window pattern.	2027200	Backing III OT I
		Then calculate the ratio between these two values.		
		Contrast ratio = Y1/Y2		
		Diameter of measuring point: 7.8mmφ(CS2000)		
		Diameter of measuring point: 3mmφ(LCD7200)		
3	Viewing	Move the luminance meter from right to left and up	EZcontrast160D	
	angle	and down and determine the angles where		
	Horizontalθ	contrast ratio is 10.		
	Verticalφ	osmaderado lo ro.		
4 V	White	Measure chromaticity coordinates x and y of CIE1931	CS2000	
	chromaticity	colorimetric system at [Data] = 3Fh		1
	Januarion	Color matching faction: 2°view		1
		Measurement angle: 1°		1
5	Burn-in	Visually check burn-in image on the screen after 2 hours		At optimized
		of "window display" ([Data]=3Fh/00h).		VCOMDC
6	Center	Measure the brightness at the center of the screen.	CS2000	
3	brightness	and singital cool at the control of the corotil.		
7		(Prightness distribution) = 400 × B/A 9/	CC2000	1
ı	Brightness	(Brightness distribution) = 100 x B/A %	CS2000	1

A : max. brightness of the 9 points B : min. brightness of the 9 points

Brightness distribution

DATA MODUL

Passion Displayed







All good things come in threes:

With **Hardware**, **Software** and **Services**, we realise unique display solutions that turn your ideas into reality.

www.data-modul.com



DATA MODUL

Passion Displayed







All good things come in threes:

With **Hardware**, **Software** and **Services**, we realise unique display solutions that turn your ideas into reality.

www.data-modul.com

