



SPECIFICATION **TIANMA**

NL8060BC31-50F 12.1" - 800 x 600 - CMOS

Version: 5.0 Date: 31.01.2021

Note: This specification is subject to change without prior notice

www.data-modul.com



TFT COLOR LCD MODULE

NL8060BC31-50F

31cm (12.1 Type) SVGA

DATA SHEET DOD-PP-3242 (5th edition)

This DATA SHEET is updated document from DOD-PP-3082(4).

All information is subject to change without notice. Please confirm the sales representative before starting to design your system.

INTRODUCTION

The Copyright to this document belongs to Tianma Japan, Ltd. (hereinafter called "TMJ"). No part of this document will be used, reproduced or copied without prior written consent of TMJ.

TMJ does and will not assume any liability for infringement of patents, copyrights or other intellectual property rights of any third party arising out of or in connection with application of the products described herein except for that directly attributable to mechanisms and workmanship thereof. No license, express or implied, is granted under any patent, copyright or other intellectual property right of TMJ.

Some electronic products would fail or malfunction at a certain rate. In spite of every effort to enhance reliability of products by TMJ, the possibility of failures and malfunction might not be avoided entirely. To prevent the risks of damage to death, human bodily injury or other property arising out thereof or in connection therewith, each customer is required to take sufficient measures in its safety designs and plans including, but not limited to, redundant system, fire-containment and anti-failure.

The products are classified into three grades: "Standard", "Special", and "Specific".

Each quality grade is designed for applications described below. Any customer who intends to use a product for application other than that of Standard is required to contact TMJ sales representative in advance.

The **Standard:** Applications as any failure, malfunction or error of the products are free from any damage to death, human bodily injury or other property (Products Safety Issue) and not related the safety of the public (Social Issues), like general electric devices.

Examples: Office equipment, audio and visual equipment, communication equipment, test and measurement equipment, personal electronic equipment, home electronic appliances, car navigation system (with no vehicle control functions), seat entertainment monitor for vehicles and airplanes, fish finder (except marine radar integrated type), PDA, etc.

The **Special:** Applications as any failure, malfunction or error of the products might directly cause any damage to death, human bodily injury or other property (Products Safety Issue) and the safety of the public (Social Issues) and required high level reliability by conventional wisdom.

Examples: Vehicle/train/ship control system, traffic signals system, traffic information control system, air traffic control system, surgery/operation equipment monitor, disaster/crime prevention system, etc.

The **Specific:** Applications as any failure, malfunction or error of the products might severe cause any damage to death, human bodily injury or other property (Products Safety Issue) and the safety of the public (Social Issues) and developed, designed and manufactured in accordance with the standards or quality assurance program designated by the customer who requires extremely high level reliability and quality.

Examples: Aerospace system (except seat entertainment monitor), nuclear control system, life support system, etc.

The quality grade of this product is the "Standard" unless otherwise specified in this document.



CONTENTS

1. OUTLINE 4 1.1 STRUCTURE AND PRINCIPLE 4 1.2 APPLICATION 4 1.3 FEATURES 4 2. GENERAL SPECIFICATIONS 5 3. BLOCK DIAGRAM 6 4. DETAILED SPECIFICATIONS 8 4. IDECHANICAL SPECIFICATIONS 8 4. ADUTE MAXIMUM RATINGS 8 4.3 ELECTRICAL CHARACTERISTICS 9 4.3.1 LCD panel signal processing board 9 4.3.2 ASDUTE MAXIMUM RATINGS 8 4.3 ELECTRICAL CHARACTERISTICS 9 4.3.1 LCD panel signal processing board 10 4.3.3 Power supply voltage ripple 10 4.3.4 Fuse 10 4.4 SOUMER SUPPLY VOLTAGE SEQUENCE 11 4.4.1 LCD panel signal processing board 12 4.5 CONNECTIONS AND FUNCTIONS FOR INTERFACE PINS 12 4.5.1 LCD annel signal processing board 12 4.5.3 Positions of socket 13 4.5 DISPLAY COLORS AND INPUT DATA SIGNALS 14 4.7 DISPLAY POSITIONS 15 4.8 SCANNING DIRECTIONS 15 4.9 INPUT SIGNAL TIMINGS 16 4.9.1 Outline of	INTRODUCTION	2
1.1 STRUCTURE AND PRINCIPLE 4 1.2 APPLICATION 4 1.3 FEATURES 4 2. GENERAL SPECIFICATIONS 5 3. BLOCK DIAGRAM 6 4. DETAILED SPECIFICATIONS 8 4. A DETAILED SPECIFICATIONS 8 4. JELECTRICAL CHARACTERISTICS 9 4.3.1 LCD panel signal processing board 9 4.3.3 Power supply voltage ripple 10 4.3.4 Fuse 10 4.4.1 LCD panel signal processing board 11 4.4.1 LCD panel signal processing board 11 4.4.2 LED driver 11 4.4.1 LCD panel signal processing board 12 4.5.1 LCD panel signal processing board 12 4.5.2 Backlight 13 4.5.3 Positions of socket 13 4.5.4 DISPLAY COLORS AND FUNCTIONS FOR INTERFACE PINS 12 4.5.1 LCD panel signal processing board 12 4.5.2 Backlight		4
1.2 APPLICATION 4 1.3 FEATURES 4 2. GENERAL SPECIFICATIONS 5 3. BLOCK DIAGRAM 6 4. DETAILED SPECIFICATIONS 8 4.1 MECHANICAL SPECIFICATIONS 8 4.1 MECHANICAL SPECIFICATIONS 8 4.2 ABSOLUTE MAXIMUM RATINGS 8 4.3 ELECTRICAL CHARACTERISTICS 9 4.3.1 LCD panel signal processing board 9 4.3.2 Backlight 10 4.3.3 Power supply voltage ripple 10 4.3.4 Fuse 10 4.3.4 Fuse 10 4.3.4 Fuse 10 4.3.2 Backlight 10 4.3.4 Fuse 10 4.3.2 Backlight 10 4.3.4 Fuse 10 4.3.1 LCD panel signal processing board 11 4.4.1 LCD panel signal processing board 11 4.4.1 LCD panel signal processing board 12 4.5.1 LCD panel signal processing board 12 4.5.1 LCD panel signal processing board 12 4.5.2 Backlight 13 4.5.3 Positions of socket 13 4.6 DSPLAY COLORS AND INUNTIONS FOR		
1.3 FEATURES 4 2. GENERAL SPECIFICATIONS 5 3. BLOCK DIAGRAM 6 4.1 MECHANICAL SPECIFICATIONS 8 4.1 MECHANICAL SPECIFICATIONS 8 4.2 ABSOLUTE MAXIMUM RATINGS 8 4.2 ABSOLUTE MAXIMUM RATINGS 9 4.3.1 LCD panel signal processing board 9 4.3.1 LCD panel signal processing board 9 4.3.3 Power supply voltage ripple 10 4.3.3 Power supply voltage sequence 10 4.3.4 Fuse 10 4.4.1 LCD panel signal processing board 11 4.4.1 LCD panel signal processing board 11 4.4.1 LCD panel signal processing board 12 4.5.1 LCD panel signal processing board 12 4.5.3 Positions of socket 13 4.6 DISPLAY COLORS AND FUNCTIONS FOR INTERFACE PINS 12 4.5.1 LCD panel signal timing some socket 13 4.6 DISPLAY COLORS AND INPUT DATA SIGNALS 14 4.7 DISPLAY POSITIONS 15 </td <td></td> <td></td>		
2. GENERAL SPECIFICATIONS. 5 3. BLOCK DIAGRAM. 6 4. DETAILED SPECIFICATIONS. 8 4.1 MECHANICAL SPECIFICATIONS. 8 4.2 ADSOLUTE MAXIMUM RATINGS. 8 4.3 ELECTRICAL CHARACTERISTICS. 9 4.3.1 LCD panel signal processing board 9 4.3.2 Backlight. 10 4.3.3 Power supply voltage ripple. 10 4.3.4 Fuse. 10 4.3.5 Power supply voltage ripple. 10 4.4.2 LED driver 11 4.4.2 LED driver 11 4.5.2 Positions of socket 12 4.5.3 Positions of socket 13 4.5.4 Positions of socket 13 4.5.5 Positions of socket 13 4.6 DISPLAY COORS AND INPUT DATA SIGNALS 14 4.7 DISPLAY POSITIONS		
3. BLOCK DIAGRAM 6 4. DETAILED SPECIFICATIONS 8 4.1 MECHANICAL SPECIFICATIONS 8 4.2 ABSOLUTE MAXIMUM RATINGS 8 4.2 ABSOLUTE MAXIMUM RATINGS 9 4.3 LECTRICAL CHARACTERISTICS 9 4.3.1 LCD panel signal processing board 9 4.3.2 Backlight 10 4.3.3 Power supply voltage ripple 10 4.3.4 Fuse 10 4.4.1 LCD panel signal processing board 11 4.4.1 LCD panel signal processing board 11 4.4.1 LCD panel signal processing board 11 4.4.2 LED driver 11 4.5.1 LCD panel signal processing board 12 4.5.1 LCD panel signal timings 16 4.5.2 Backlight 13 4.5.3 Positions of socket 13 4.6 DISPLAY COLORS AN		
4. DETAILED SPECIFICATIONS 8 4.1 MECHANICAL SPECIFICATIONS 8 4.2 ABSOLUTE MAXIMUM RATINGS 8 4.3 ELECTRICAL CHARACTERISTICS 9 4.3.1 LCD panel signal processing board 9 4.3.1 LCD panel signal processing board 10 4.3.3 Power supply voltage ripple. 10 4.3.4 Fuse 10 4.3.4 Power SUPPLY VOLTAGE SEQUENCE. 11 4.4.1 LCD panel signal processing board 11 4.4.2 LED driver 11 4.5.1 LCD panel signal processing board 12 4.5.1 LCD panel signal processing board 12 4.5.1 LCD panel signal processing board 12 4.5.2 Backlight 13 4.6 DISPLAY COLORS AND FUNCTIONS FOR INTERFACE PINS 12 4.5.1 LCD panel signal processing board 12 4.5.2 Backlight 13 4.6 DISPLAY COLORS AND INPUT DATA SIGNALS 14 4.7 DISPLAY POSITIONS 15 4.9 INPUT SIGNAL TIMINGS 16 4.9.1 Outline of input signal timings 16 4.9.1 Outline of not characteristics 22 4.10.1 Optical characteristics 22		
4.1 MECHANICAL SPECIFICATIONS 8 4.2 ABSOLUTE MAXIMUM RATINGS 8 4.3 ELECTRICAL CHARACTERISTICS 9 4.3.1 LCD panel signal processing board 9 4.3.2 Backlight 10 4.3.4 Fuse 10 4.4.1 LCD panel signal processing board 11 4.4.1 LCD panel signal processing board 11 4.4.2 LEB driver 11 4.5.1 LCD panel signal processing board 12 4.5.1 LCD panel signal processing board 12 4.5.2 Backlight 13 4.5.3 Positions of socket 13 4.5.3 Positions of socket 13 4.6 DISPLAY COLORS AND INPUT DATA SIGNALS 14 4.7 DISPLAY COLORS AND INPUT DATA SIGNALS 14 4.9 UNUT SIGNAL TIMINGS 15 4.8 SCANNING DIRECTIONS 15 4.9 UNUTI SIGNAL TIMINGS 16 4.9.1 UNUTI SIGNAL TIMINGS 16 4.9.2 Timing characteristics 22 4.10.1 Optical characteristics 22 </td <td></td> <td></td>		
4.2 ABSOLUTE MAXIMUM RATINGS 8 4.3 ELECTRICAL CHARACTERISTICS 9 4.3.1 LCD panel signal processing board 9 4.3.2 Backlight 10 4.3.3 Power supply voltage ripple 10 4.3.4 Fuse 10 4.3.4 Fuse 10 4.4.1 LCD panel signal processing board 11 4.4.1 LCD panel signal processing board 11 4.4.1 LCD panel signal processing board 12 4.5.1 LCD panel signal processing board 12 4.5.1 LCD panel signal processing board 12 4.5.2 Backlight 13 4.5.3 Positions of socket 13 4.6 DISPLAY COLORS AND INPUT DATA SIGNALS 14 4.7 DISPLAY POSITIONS 15 4.8 SCANNING DIRECTIONS 15 4.9 INPUT SIGNAL TIMINGS 16 4.9.1 Outline of input signal timings 16 4.9.2 Timing characteristics 22 4.10.1 Optical characteristics 22 4.10.1 Optical characteristics 23 4.10.2 Definition of response times 23 4.10.3 Definition of viewing angles 23 4.10.4 Definition of viewing angles		
4.3 ELECTRICAL CHARACTERISTICS. 9 4.3.1 LCD panel signal processing board 9 4.3.2 Backlight 10 4.3.3 Power supply voltage ripple 10 4.3.4 Fuse 10 4.4.7 DWER SUPPLY VOLTAGE SEQUENCE 11 4.4.1 LCD panel signal processing board 11 4.4.2 LED driver 11 4.4.1 LCD panel signal processing board 12 4.5.1 LCD panel signal processing board 12 4.5.1 LCD panel signal processing board 12 4.5.2 Backlight 13 4.5.3 Positions of socket 13 4.5.4 ScanNING DINPUT DATA SIGNALS 14 4.7 DISPLAY POSITIONS 15 4.8 SCANNING DIRECTIONS 15 4.9 INPUT SIGNAL TIMINGS 16 4.9.1 Outline of input signal timings. 16 4.9.2 Timing characteristics 17 4.9.3 Input signal timing chart 19 4.10 OPTICS 22 4.10.1 Optical characteristics 22 4.10.2 Definition of contrast ratio 23 4.10.4 Definition of response times 23 4.10.5 Definition of viuwing angles 25		
4.3.1 LCD panel signal processing board94.3.2 Backlight104.3.3 Power supply voltage ripple104.3.4 Fuse104.4 POWER SUPPLY VOLTAGE SEQUENCE114.4.1 LCD panel signal processing board114.4.1 LCD panel signal processing board114.4.2 LED driver114.5 CONNECTIONS AND FUNCTIONS FOR INTERFACE PINS124.5.1 LCD panel signal processing board124.5.2 Backlight134.5.3 Positions of socket134.6 DISPLAY COLORS AND INPUT DATA SIGNALS144.7 DISPLAY POSITIONS154.8 SCANNING DIRECTIONS154.9 INPUT SIGNAL TIMINGS164.9.1 Outline of input signal timings.164.9.2 Timing characteristics224.10.1 Optical characteristics234.10.2 Definition of contrast ratio234.10.3 Definition of response times234.10.3 Definition of response times234.10.4 Definition of response times257.7 RECAUTIONS267.3 ACAUTIONS267.3 ACAUTIONS267.3 Characteristics277.3.4 Others267.3.4 Others277.3.4 Others288.1 FRONT VIEW28		
4.3.2 Backlight104.3.3 Power supply voltage ripple104.3.4 Fuse104.4 POWER SUPPLY VOLTAGE SEQUENCE114.4.1 LCD panel signal processing board114.4.1 LCD panel signal processing board114.4.2 LED driver114.5 CONNECTIONS AND FUNCTIONS FOR INTERFACE PINS124.5.1 LCD panel signal processing board124.5.2 Backlight134.5.3 Positions of socket134.6 DISPLAY COLORS AND INPUT DATA SIGNALS144.7 DISPLAY POSITIONS154.8 SCANNING DIRECTIONS154.8 SCANNING DIRECTIONS154.9 INPUT SIGNAL TIMINGS164.9.1 Outline of input signal timings.164.9.2 Timing characteristics174.9.3 Input signal timing chart194.10.1 Optical characteristics224.10.1 Optical characteristics234.10.3 Definition of contrast ratio234.10.4 Definition of response times234.10.5 Definition of response times235. ESTIMATED LUMINANCE LIFETIME246. RELIABILITY TESTS267.3 ATTENTIONS267.3.3 Characteristics277.3.4 Others277.3.4 Others277.3.4 Others288.1 FRONT VIEW28		
4.3.3 Power supply voltage ripple104.3.4 Fuse104.4 POWER SUPPLY VOLTAGE SEQUENCE114.4.1 LCD panel signal processing board114.4.2 LED driver114.5 CONNECTIONS AND FUNCTIONS FOR INTERFACE PINS124.5.1 LCD panel signal processing board124.5.1 LCD panel signal processing board124.5.2 Backlight134.5.3 Positions of socket134.6 DISPLAY COLORS AND INPUT DATA SIGNALS144.7 DISPLAY POSITIONS154.8 SCANNING DIRECTIONS154.8 SCANNING DIRECTIONS154.9 INPUT SIGNAL TIMINGS164.9.1 Outline of input signal timings164.9.2 Timing characteristics224.10.1 Optical characteristics224.10.2 Definition of contrast ratio234.10.3 Definition of input signal timing sumets234.10.4 Definition of response times234.10.5 Definition of viewing angles235. ESTIMATED LUMINANCE LIFETIME246. RELIABILITY TESTS267.3.4 CUNTIONS267.3.3 Characteristics277.3.4 Others267.3.4 Others278.1 FRONT VIEW28		
4.3.4 Fuse104.4 POWER SUPPLY VOLTAGE SEQUENCE114.4.1 LCD panel signal processing board114.4.2 LED driver114.5 CONNECTIONS AND FUNCTIONS FOR INTERFACE PINS124.5.1 LCD panel signal processing board124.5.2 Backlight134.5.3 Positions of socket134.6 DISPLAY COLORS AND INPUT DATA SIGNALS144.7 DISPLAY POSITIONS154.8 SCANNING DIRECTIONS154.8 SCANNING DIRECTIONS164.9.1 Outline of input signal timings164.9.2 Timing characteristics174.9.3 Input signal timing chart194.10.1 Optical characteristics224.10.1 Optical characteristics224.10.2 Definition of contrast ratio234.10.3 Definition of viewing angles234.10.4 Definition of viewing angles234.10.5 Definition of viewing angles257 PRECAUTIONS267.1 MEANING OF CAUTION SIGNS267.3 A Others267.3.4 Others278.1 FRONT VIEW28		
4.4 POWER SUPPLY VOLTAGE SEQUENCE 11 4.4.1 LCD panel signal processing board 11 4.4.2 LED driver 11 4.4.2 LED driver 11 4.5 CONNECTIONS AND FUNCTIONS FOR INTERFACE PINS 12 4.5.1 LCD panel signal processing board 12 4.5.2 Backlight 13 4.5.3 Positions of socket 13 4.6 DISPLAY COLORS AND INPUT DATA SIGNALS 14 4.7 DISPLAY POSITIONS 15 4.8 SCANNING DIRECTIONS 15 4.9 INPUT SIGNAL TIMINGS 16 4.9.1 Outline of input signal timings. 16 4.9.2 Timing characteristics 17 4.9.3 Input signal timing chart 19 4.10.0 OPTICS 22 4.10.1 Optical characteristics 22 4.10.2 Definition of contrast ratio 23 4.10.3 Definition of response times 23 4.10.4 Definition of viewing angles 23 5. ESTIMATED LUMINANCE LIFETIME 24 6. RELIABILITY TESTS 26 7.3 ACHARENT CONS 26 7.3 ACHARENT CONS 26 7.3 ACHARENT CONS 26 7.3		
4.4.1 LCD panel signal processing board114.4.2 LED driver114.5.2 CONNECTIONS AND FUNCTIONS FOR INTERFACE PINS124.5.1 LCD panel signal processing board124.5.2 Backlight134.5.3 Positions of socket134.6 DISPLAY COLORS AND INPUT DATA SIGNALS144.7 DISPLAY COLORS AND INPUT DATA SIGNALS144.7 DISPLAY POSITIONS154.8 SCANNING DIRECTIONS164.9.1 Outline of input signal timings164.9.2 Timing characteristics174.9.3 Input signal timing chart194.10 OPTICS224.10.1 Optical characteristics224.10.2 Definition of contrast ratio234.10.3 Definition of response times234.10.5 Definition of viewing angles235. ESTIMATED LUMINANCE LIFETIME246. RELIABILITY TESTS267.1 MEANING OF CAUTION SIGNS267.3.4 Others267.3.4 Others267.3.4 Others267.3.4 Others277.3.4 Others277.3.4 Others267.3.4 Others267.3.4 Others277.3.4 Others277.3.4 Others277.3.4 Others277.3.4 Others277.3.4 Others267.3.4 Others277.3.4 Others277.3.4 Others277.3.4 Others277.3.4 Others277.3.4 Others277.3.4 Other		
4.4.2 LED driver114.5.2 CONNECTIONS AND FUNCTIONS FOR INTERFACE PINS124.5.1 LCD panel signal processing board124.5.2 Backlight134.5.3 Positions of socket134.6 DISPLAY COLORS AND INPUT DATA SIGNALS144.7 DISPLAY POSITIONS154.8 SCANNING DIRECTIONS154.9 INPUT SIGNAL TIMINGS164.9.1 Outline of input signal timings164.9.2 Timing characteristics174.9.3 Input signal timing chart194.10 OPTICS224.10.1 Optical characteristics224.10.2 Definition of contrast ratio234.10.3 Definition of luminance uniformity234.10.4 Definition of response times234.10.5 Definition of viewing angles235. ESTIMATED LUMINANCE LIFETIME246. RELIABILITY TESTS267.3 Characteristics267.3.1 Handling of the product267.3.2 CAUTIONS267.3.4 Others277.3.4 Others278.1 FRONT VIEW28		
4.5 CONNECTIONS AND FUNCTIONS FOR INTERFACE PINS 12 4.5.1 LCD panel signal processing board 12 4.5.2 Backlight 13 4.5.3 Positions of socket 13 4.6 DISPLAY COLORS AND INPUT DATA SIGNALS 14 4.7 DISPLAY POSITIONS 15 4.8 SCANNING DIRECTIONS 15 4.8 SCANNING DIRECTIONS 16 4.9.1 Outline of input signal timings 16 4.9.2 Timing characteristics 17 4.9.3 Input signal timing chart 19 4.10 OPTICS 22 4.10.1 Optical characteristics 22 4.10.1 Optical characteristics 23 4.10.2 Definition of contrast ratio 23 4.10.3 Definition of response times 23 4.10.4 Definition of viewing angles 25 5. ESTIMATED LUMINANCE LIFETIME 24 6. RELIABILITY TESTS 25 7. PRECAUTIONS 26 7.3 ACTENTIONS 26 7.3.1 Handling of the product 26 7.3.2 Characteristics 27 7.3.4 Others 26 7.3.4 Others 26 7.3.4 Others 27	4.4.1 LCD panel signal processing board	. 11
4.5.1 LCD panel signal processing board 12 4.5.2 Backlight 13 4.5.3 Positions of socket 13 4.6 DISPLAY COLORS AND INPUT DATA SIGNALS 14 4.7 DISPLAY POSITIONS 15 4.8 SCANNING DIRECTIONS 15 4.9 INPUT SIGNAL TIMINGS 16 4.9.1 Outline of input signal timings 16 4.9.2 Timing characteristics 17 4.9.3 Input signal timing chart 19 4.10 OPTICS 22 4.10.1 Optical characteristics 22 4.10.2 Definition of contrast ratio 23 4.10.3 Definition of fuminance uniformity 23 4.10.4 Definition of response times 23 4.10.5 Definition of viewing angles 23 5. ESTIMATED LUMINANCE LIFETIME 24 6. RELIABILITY TESTS 25 7. PRECAUTIONS 26 7.3.1 Handling of the product 26 7.3.2 Environment 27 7.3.4 Others 27 8.1 FRONT VIEW 28		
4.5.2 Backlight 13 4.5.3 Positions of socket 13 4.6 DISPLAY COLORS AND INPUT DATA SIGNALS 14 4.7 DISPLAY POSITIONS 15 4.8 SCANNING DIRECTIONS 15 4.9 INPUT SIGNAL TIMINGS 16 4.9.1 Outline of input signal timings 16 4.9.2 Timing characteristics 17 4.9.3 Input signal timing chart 19 4.10.0 OPTICS 22 4.10.1 Optical characteristics 22 4.10.2 Definition of contrast ratio 23 4.10.3 Definition of luminance uniformity 23 4.10.5 Definition of response times 23 4.10.5 Definition of viewing angles 23 5. ESTIMATED LUMINANCE LIFETIME 24 6. RELIABILITY TESTS 25 7.1 MEANING OF CAUTION SIGNS 26 7.3.1 Handling of the product 26 7.3.2 Environment 27 7.3.4 Others 27 7.3.4 Others 28 8.1 FRONT VIEW 28		
4.5.3 Positions of socket134.6 DISPLAY COLORS AND INPUT DATA SIGNALS144.7 DISPLAY POSITIONS154.8 SCANNING DIRECTIONS154.9 INPUT SIGNAL TIMINGS164.9.1 Outline of input signal timings164.9.2 Timing characteristics174.9.3 Input signal timing chart194.10 OPTICS224.10.1 Optical characteristics224.10.2 Definition of contrast ratio234.10.3 Definition of routing angles234.10.4 Definition of viewing angles235. ESTIMATED LUMINANCE LIFETIME246. RELIABILITY TESTS257. PRECAUTIONS267.3 ATTENTIONS267.3.1 Handling of the product267.3.2 Environment277.3.3 Characteristics277.3.4 Others278.1 FRONT VIEW28		
4.6 DISPLAY COLORS AND INPUT DATA SIGNALS 14 4.7 DISPLAY POSITIONS 15 4.8 SCANNING DIRECTIONS 15 4.8 SCANNING DIRECTIONS 16 4.9 INPUT SIGNAL TIMINGS 16 4.9.1 Outline of input signal timings 16 4.9.2 Timing characteristics 17 4.9.3 Input signal timing chart 19 4.10 OPTICS 22 4.10.1 Optical characteristics 22 4.10.2 Definition of contrast ratio 23 4.10.3 Definition of luminance uniformity 23 4.10.4 Definition of response times 23 4.10.5 Definition of viewing angles 23 5. ESTIMATED LUMINANCE LIFETIME 24 6. RELIABILITY TESTS 25 7. PRECAUTIONS 26 7.1 MEANING OF CAUTION SIGNS 26 7.2 CAUTIONS 26 7.3.4 Others 27 8.0 UTLINE DRAWINGS 28 8.1 FRONT VIEW 28		
4.7 DISPLAY POSITIONS 15 4.8 SCANNING DIRECTIONS 15 4.9 INPUT SIGNAL TIMINGS 16 4.9.1 Outline of input signal timings 16 4.9.2 Timing characteristics 17 4.9.3 Input signal timing chart 19 4.10 OPTICS 22 4.10.1 Optical characteristics 22 4.10.2 Definition of contrast ratio 23 4.10.3 Definition of luminance uniformity 23 4.10.4 Definition of response times 23 4.10.5 Definition of viewing angles 23 4.10.5 Definition of viewing angles 23 5. ESTIMATED LUMINANCE LIFETIME 24 6. RELIABILITY TESTS 25 7. PRECAUTIONS 26 7.1 MEANING OF CAUTION SIGNS 26 7.2 CAUTIONS 26 7.3 ATTENTIONS 26 7.3.4 Others 27 8.0 UTLINE DRAWINGS 28 8.1 FRONT VIEW 28		
4.8 SCANNING DIRECTIONS 15 4.9 INPUT SIGNAL TIMINGS 16 4.9.1 Outline of input signal timings 16 4.9.2 Timing characteristics 17 4.9.3 Input signal timing chart 19 4.10 OPTICS 22 4.10.1 Optical characteristics 22 4.10.2 Definition of contrast ratio 23 4.10.3 Definition of luminance uniformity 23 4.10.4 Definition of response times 23 4.10.5 Definition of viewing angles 23 4.10.5 Definition of viewing angles 23 5. ESTIMATED LUMINANCE LIFETIME 24 6. RELIABILITY TESTS 25 7. PRECAUTIONS 26 7.1 MEANING OF CAUTION SIGNS 26 7.3 ATTENTIONS 26 7.3.1 Handling of the product 26 7.3.2 Environment. 27 7.3.4 Others 27 8.1 FRONT VIEW 28		
4.9 INPUT SIGNAL TIMINGS 16 4.9.1 Outline of input signal timings 16 4.9.2 Timing characteristics 17 4.9.3 Input signal timing chart 19 4.10 OPTICS 22 4.10.1 Optical characteristics 22 4.10.2 Definition of contrast ratio 23 4.10.3 Definition of luminance uniformity 23 4.10.4 Definition of response times 23 4.10.5 Definition of viewing angles 23 4.10.5 Definition of Viewing angles 23 4.10.5 Definition of Viewing angles 23 5. ESTIMATED LUMINANCE LIFETIME 24 6. RELIABILITY TESTS 25 7. PRECAUTIONS 26 7.1 MEANING OF CAUTION SIGNS 26 7.3 ATTENTIONS 26 7.3.1 Handling of the product 26 7.3.3 Characteristics 27 7.3.4 Others 27 8. OUTLINE DRAWINGS 28 8.1 FRONT VIEW 28		
4.9.1 Outline of input signal timings 16 4.9.2 Timing characteristics 17 4.9.3 Input signal timing chart 19 4.10 OPTICS 22 4.10.1 Optical characteristics 22 4.10.2 Definition of contrast ratio 23 4.10.3 Definition of contrast ratio 23 4.10.4 Definition of response times 23 4.10.5 Definition of viewing angles 23 4.10.5 Definition of viewing angles 23 5. ESTIMATED LUMINANCE LIFETIME 24 6. RELIABILITY TESTS 25 7. PRECAUTIONS 26 7.1 MEANING OF CAUTION SIGNS 26 7.3 ATTENTIONS 26 7.3.1 Handling of the product 26 7.3.2 Environment 27 7.3.4 Others 27 8.1 FRONT VIEW 28		
4.9.2 Timing characteristics 17 4.9.3 Input signal timing chart 19 4.10 OPTICS 22 4.10.1 Optical characteristics 22 4.10.2 Definition of contrast ratio 23 4.10.3 Definition of luminance uniformity 23 4.10.4 Definition of response times 23 4.10.5 Definition of viewing angles 23 4.10.5 Definition of viewing angles 23 5. ESTIMATED LUMINANCE LIFETIME 24 6. RELIABILITY TESTS 25 7. PRECAUTIONS 26 7.1 MEANING OF CAUTION SIGNS 26 7.2 CAUTIONS 26 7.3 ATTENTIONS 26 7.3.1 Handling of the product 26 7.3.2 Environment 27 7.3.4 Others 27 8. OUTLINE DRAWINGS 28 8.1 FRONT VIEW 28		
4.9.3 Input signal timing chart 19 4.10 OPTICS 22 4.10.1 Optical characteristics 22 4.10.2 Definition of contrast ratio 23 4.10.3 Definition of luminance uniformity 23 4.10.4 Definition of response times 23 4.10.5 Definition of viewing angles 23 4.10.5 Definition of viewing angles 23 5. ESTIMATED LUMINANCE LIFETIME 24 6. RELIABILITY TESTS 25 7. PRECAUTIONS 26 7.1 MEANING OF CAUTION SIGNS 26 7.2 CAUTIONS 26 7.3 ATTENTIONS 26 7.3.1 Handling of the product 26 7.3.2 Environment 27 7.3.4 Others 27 8. OUTLINE DRAWINGS 28 8.1 FRONT VIEW 28		
4.10 OPTICS 22 4.10.1 Optical characteristics 22 4.10.2 Definition of contrast ratio 23 4.10.3 Definition of luminance uniformity 23 4.10.4 Definition of response times 23 4.10.5 Definition of viewing angles 23 5. ESTIMATED LUMINANCE LIFETIME 24 6. RELIABILITY TESTS 25 7. PRECAUTIONS 26 7.1 MEANING OF CAUTION SIGNS 26 7.2 CAUTIONS 26 7.3 ATTENTIONS 26 7.3.1 Handling of the product 26 7.3.3 Characteristics 27 7.3.4 Others 27 8.1 FRONT VIEW 28		
4.10.1 Optical characteristics 22 4.10.2 Definition of contrast ratio 23 4.10.3 Definition of luminance uniformity 23 4.10.4 Definition of response times 23 4.10.5 Definition of viewing angles 23 5. ESTIMATED LUMINANCE LIFETIME 24 6. RELIABILITY TESTS 25 7. PRECAUTIONS 26 7.1 MEANING OF CAUTION SIGNS 26 7.2 CAUTIONS 26 7.3 ATTENTIONS 26 7.3.1 Handling of the product 26 7.3.2 Environment. 27 7.3.3 Characteristics 27 7.3.4 Others 28 8.1 FRONT VIEW 28		
4.10.2 Definition of contrast ratio234.10.3 Definition of luminance uniformity234.10.4 Definition of response times234.10.5 Definition of viewing angles235. ESTIMATED LUMINANCE LIFETIME246. RELIABILITY TESTS257. PRECAUTIONS267.1 MEANING OF CAUTION SIGNS267.2 CAUTIONS267.3 ATTENTIONS267.3.1 Handling of the product267.3.2 Environment277.3.3 Characteristics277.3.4 Others288.1 FRONT VIEW28		
4.10.3 Definition of luminance uniformity234.10.4 Definition of response times234.10.5 Definition of viewing angles235. ESTIMATED LUMINANCE LIFETIME246. RELIABILITY TESTS257. PRECAUTIONS267.1 MEANING OF CAUTION SIGNS267.2 CAUTIONS267.3 ATTENTIONS267.3.1 Handling of the product267.3.2 Environment277.3.3 Characteristics277.3.4 Others288.1 FRONT VIEW28		
4.10.4 Definition of response times234.10.5 Definition of viewing angles235. ESTIMATED LUMINANCE LIFETIME246. RELIABILITY TESTS257. PRECAUTIONS267.1 MEANING OF CAUTION SIGNS267.2 CAUTIONS267.3 ATTENTIONS267.3.1 Handling of the product267.3.2 Environment277.3.3 Characteristics277.3.4 Others288.1 FRONT VIEW28		
4.10.5 Definition of viewing angles235. ESTIMATED LUMINANCE LIFETIME246. RELIABILITY TESTS257. PRECAUTIONS267.1 MEANING OF CAUTION SIGNS267.2 CAUTIONS267.3 ATTENTIONS267.3.1 Handling of the product267.3.2 Environment277.3.3 Characteristics277.3.4 Others278. OUTLINE DRAWINGS288.1 FRONT VIEW28		
5. ESTIMATED LUMINANCE LIFETIME 24 6. RELIABILITY TESTS 25 7. PRECAUTIONS 26 7.1 MEANING OF CAUTION SIGNS 26 7.2 CAUTIONS 26 7.3 ATTENTIONS 26 7.3.1 Handling of the product 26 7.3.2 Environment. 27 7.3.4 Others 27 8. OUTLINE DRAWINGS 28 8.1 FRONT VIEW 28	4.10.4 Definition of response times	. 23
6. RELIABILITY TESTS 25 7. PRECAUTIONS 26 7.1 MEANING OF CAUTION SIGNS 26 7.2 CAUTIONS 26 7.3 ATTENTIONS 26 7.3.1 Handling of the product 26 7.3.2 Environment 26 7.3.3 Characteristics 27 7.3.4 Others 27 8. OUTLINE DRAWINGS 28 8.1 FRONT VIEW 28		
7. PRECAUTIONS. 26 7.1 MEANING OF CAUTION SIGNS. 26 7.2 CAUTIONS. 26 7.3 ATTENTIONS. 26 7.3.1 Handling of the product 26 7.3.2 Environment. 27 7.3.3 Characteristics. 27 7.3.4 Others. 27 8. OUTLINE DRAWINGS 28 8.1 FRONT VIEW. 28		
7.1 MEANING OF CAUTION SIGNS 26 7.2 CAUTIONS 26 7.3 ATTENTIONS 26 7.3.1 Handling of the product 26 7.3.2 Environment 26 7.3.3 Characteristics 27 7.3.4 Others 27 8. OUTLINE DRAWINGS 28 8.1 FRONT VIEW 28	6. RELIABILITY TESTS	. 25
7.2 CAUTIONS 26 7.3 ATTENTIONS 26 7.3.1 Handling of the product 26 7.3.2 Environment 27 7.3.3 Characteristics 27 7.3.4 Others 27 8. OUTLINE DRAWINGS 28 8.1 FRONT VIEW 28		
7.3 ATTENTIONS 26 7.3.1 Handling of the product 26 7.3.2 Environment 27 7.3.3 Characteristics 27 7.3.4 Others 27 8. OUTLINE DRAWINGS 28 8.1 FRONT VIEW 28	7.1 MEANING OF CAUTION SIGNS	. 26
7.3.1 Handling of the product 26 7.3.2 Environment 27 7.3.3 Characteristics 27 7.3.4 Others 27 8. OUTLINE DRAWINGS 28 8.1 FRONT VIEW 28		
7.3.2 Environment. 27 7.3.3 Characteristics 27 7.3.4 Others 27 8. OUTLINE DRAWINGS 28 8.1 FRONT VIEW 28	7.3 ATTENTIONS	. 26
7.3.3 Characteristics 27 7.3.4 Others 27 8. OUTLINE DRAWINGS 28 8.1 FRONT VIEW 28	7.3.1 Handling of the product	. 26
7.3.4 Others 27 8. OUTLINE DRAWINGS 28 8.1 FRONT VIEW 28		
8. OUTLINE DRAWINGS 28 8.1 FRONT VIEW 28	7.3.3 Characteristics	. 27
8.1 FRONT VIEW	7.3.4 Others	. 27
8.2 REAR VIEW		
	8.2 REAR VIEW	. 29

1. OUTLINE

1.1 STRUCTURE AND PRINCIPLE

Color LCD module NL8060BC31-50F are composed of the amorphous silicon thin film transistor liquid crystal display (a-Si TFT LCD) panel structure with driver LSIs for driving the TFT (Thin Film Transistor) array and a backlight.

The a-Si TFT LCD panel structure is injected liquid crystal material into a narrow gap between the TFT array glass substrate and a color-filter glass substrate.

Color (Red, Green, Blue) data signals from a host system (e.g. signal generator, etc.) are modulated into best form for active matrix system by a signal processing board, and sent to the driver LSIs which drive the individual TFT arrays.

The TFT array as an electro-optical switch regulates the amount of transmitted light from the backlight assembly, when it is controlled by data signals. Color images are created by regulating the amount of transmitted light through the TFT array of red, green and blue dots.

1.2 APPLICATION

• For industrial use

1.3 FEATURES

- High luminance
- Wide viewing angle
- Wide temperature range
- 6-bit digital RGB signals
- Reversible-scan direction
- Long life LED backlight
- Replaceable lamp for backlight
- Compliant with the European RoHS directive (2011/65/EU) and Delegated Directive (2015/863/EU, Amending Annex II of 2011/65/EU)
- Acquisition product for UL60950-1 /CSA C22.2 No.60950-1-03 (File number: E170632)
- Acquisition product for UL62368-1 /CSA C22.2 No.62368-1-14 (File number: E170632)

☆


☆



2. GENERAL SPECIFICATIONS

Display area	246.0 (H) × 184.5 (V) mm					
Diagonal size of display	31cm (12.1 inches)					
Drive system	a-Si TFT active matrix					
Display color	262,144 colors					
Pixel	800 (H) × 600 (V) pixels					
Pixel arrangement	RGB (Red dot, Green dot, Blue dot) vertical stripe					
Dot pitch	$0.1025 (H) \times 0.3075 (V) mm$					
Pixel pitch	$0.3075 (H) \times 0.3075 (V) mm$ 260 5 (W) × 203 0 (H) × 8 7 (D) mm (typ)					
Module size	$260.5 (W) \times 203.0 (H) \times 8.7 (D) mm (typ.)$					
Weight	490 g (typ.)					
Contrast ratio	1000:1 (typ.)					
Viewing angle	 At the contrast ratio ≥ 10:1 Horizontal: Right side 80° (typ.), Left side 80° (typ.) Vertical: Up side 80° (typ.), Down side 80° (typ.) 					
Designed viewing direction	 At DPS= Low or Open: Normal scan Viewing direction without image reversal: Up side (12 o'clock) Viewing direction with contrast peak: Down side (6 o'clock) Viewing angle with optimum grayscale (γ = 2.2): Normal axis (perpendicular) 					
Polarizer surface	Clear					
Polarizer pencil-hardness	3H (min.) [by JIS K5600]					
Color gamut	At LCD panel center 40 % (typ.) [against NTSC color space]					
Response time	$Ton + Toff (10\% \leftrightarrow 90\%)$ 18 ms (typ.)					
Luminance	At IL= 50 mA/One circuit 900 cd/m ² (typ.)					
Signal system	6-bit digital signals for data of RGB colors, Dot clock (CLK), Data enable (DE), Horizontal synchronous signal (Hsync), Vertical synchronous signal (Vsync)					
Power supply voltage	LCD panel signal processing board: 3.3V or 5.0V					
Backlight	LED backlight: (Replaceable part • Lamp holder set: 121LHS32 (Recommended LED driver board (Option) • LED driver board: 104PW03F • Corresponding wiring harness: 121CBL03					
Power consumption	At IL= 50 mA/One circuit, Checkered flag pattern 7.1 W (typ.)					

3. BLOCK DIAGRAM

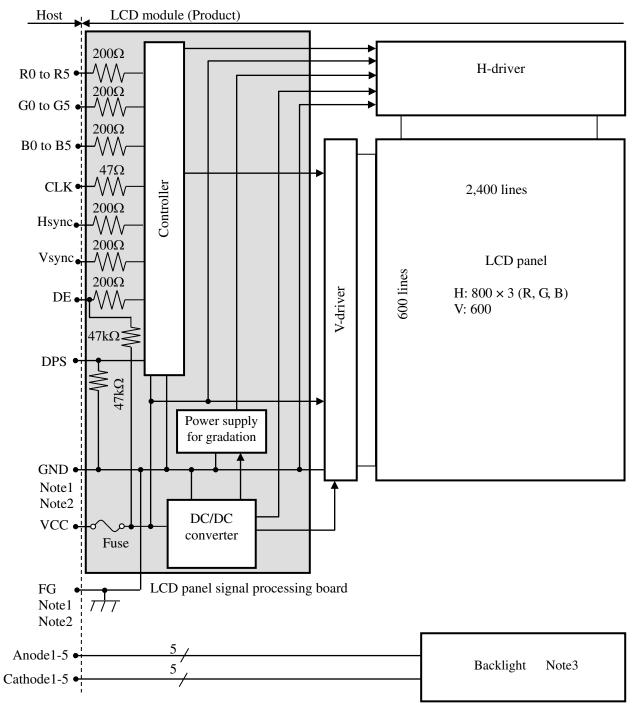

Note1:	Relation between GND (Signal ground), FG (Frame ground) in the LCD modu	le is as follows.
	GND- FG	Connected	

Note2: GND and FG must be connected to customer equipment's ground, and it is recommended that these grounds to be connected together in customer equipment.



Note3: Backlight in detail

Anode 1 •	pa pa	AA	<u>^</u>
Cathode 1 🔶		·····	
Anode 2 •			
	,AA ,AA	,AA	,AA
Cathode 2 •			
Anode 3 👞			
	AA AA	AA	MA
Cathode 3 •			
Anode 4 •			
	AA AA	AA	22
Cathode 4 •			
Anode 5 •			
	AA AA	21	22
Cathode 5 •			

Backlight

4. DETAILED SPECIFICATIONS

4.1 MECHANICAL SPECIFICATIONS

Parameter	Specification		Unit
Module size	$260.5 \pm 0.5 \text{ (W)} \times 203.0 \pm 0.5 \text{ (H)} \times 8.7 \pm 0.5 \text{ (D)}$	Note1	mm
Display area	246.0 (H) × 184.5 (V)	Note1	mm
Weight	490 (typ.), 540 (max.)		g

Note1: See "8. OUTLINE DRAWINGS".

4.2 ABSOLUTE MAXIMUM RATINGS

	Paramete	r	Symbol	Rating	Unit	Remarks
Power supply voltage	LCD panel signal processing board		VCC	-0.3 to +6.5	v	
Input voltage	Display signals Input voltage Note1		VD	-0.3 to VCC+0.3	v	Ta= 25°C
for signals	Fu	nction signal Note2	VF	-0.5 10 VCC+0.5	v	
Backlight	Forward current		IL	60	mA	per one circuit
	Storage temperature			-30 to +80	°C	-
		Front surface	TopF	-30 to +80	°C	Note3
Operating te	mperature	Rear surface	TopR	-30 to +80	°C	Note4
				≤ 95	%	$Ta \le 40^{\circ}C$
				≤ 85	%	$40^{\circ}C \le Ta \le 50^{\circ}C$
	Relative hum Note5	idity	RH	≤ 5 5	%	$50^{\circ}C \le Ta \le 60^{\circ}C$
10005				≤ 36	%	$60^{\circ}C \le Ta \le 70^{\circ}C$
				≤ 24	%	$70^{\circ}C \le Ta \le 80^{\circ}C$
	Absolute hum Note5	AH	≤ 70 Note6	g/m ³	Ta= 80°C	

Note1: CLK, Hsync, Vsync, DE, DATA (R0 to R5, G0 to G5, B0 to B5)

Note2: DPS

Note3: Measured at LCD panel surface (including self-heat)

Note4: Measured at LCD module's rear shield surface (including self-heat)

Note5: No condensation

Note6: Water amount at Ta= 80° C and RH= 24%

4.3 ELECTRICAL CHARACTERISTICS

4.3.1 LCD panel signal processing board

	8 -					(Ta	= 25°C, Note1)
Parameter		Symbol	min.	typ.	max.	Unit	Remarks
Power supply voltage		VCC	3.0	3.3	3.6	V	at VCC= 3.3V
Tower suppry voltage		vee	4.75	5.0	5.25	V	at VCC= 5.0V
Power supply current	Davies and la summer		-	310 Note2	460 Note3	mA	at VCC= 3.3V
Tower suppry current	Power supply current		-	210 Note2	300 Note3	mA	at VCC= 5.0V
Logic input voltage for	High	VDH	0.7VCC	-	VCC	V	
display signals Low		VDL	0	-	0.3VCC	v	CMOS local
High		VFH	0.7VCC	-	VCC	V	CMOS level
Input voltage for DPS signal	Low	VFL	0	-	0.3VCC	V	

Note1: When designing of the power supply, take the measures for the prevention of surge voltage. Note2: Checkered flag pattern [by IEC 61747-6]

Note3: Pattern for maximum current



4.3.2 Backlight

(Ta= 25°C, Note1, Note2, Note3)

Parameter	Symbol	min.	typ.	max.	Unit	Remarks	
Forward current	IL	-	50.0	55.0	mA	-	
		21.2	24.0	27.2		Ta= +25°C at IL= 50mA /One circuit	
Forward Voltage	VL	19.0	-	-		Ta= +80°C at IL= 50mA /One circuit	
		VL	-	-	29.8	V	Ta= -30°C at IL= 50mA /One circuit
		-	-	30.1		Ta= -30°C at IL= 55mA /One circuit	

Note1: Please drive with constant current.

Note2: The above specifications are for one LED circuit of the backlight.

Note3: The Luminance uniformity may be changed depending on the current variation between 5 circuits. It is recommended that the current value difference among the circuits be less than 5%.

4.3.3 Power supply voltage ripple

This product works even if the ripple voltage levels are over the permissible values as the following table, but there might be noise on the display image.

Power supp	ly voltage	Ripple voltage Note1 (Measure at input terminal of power supply)	Unit
VCC	3.3 V	≤ 100	mVp-p
Vee	5.0 V	≤ 100	mVp-p

Note1: The permissible ripple voltage includes spike noise.


4.3.4 Fuse

Parameter			Dating	Eusing autom	Domonico
Farameter	Туре	Supplier	Rating	Fusing current	Remarks
VCC	FCC16202AB	KAMAYA ELECTRIC	2.0A	4.0A	Note1
VCC	FCC10202AB	Co., Ltd.	36V	4.0A	note1


Note1: The power supply's rated current must be more than the fusing current. If it is less than the fusing current, the fuse may not blow in a short time, and then nasty smell, smoke and so on may occur.

4.4 POWER SUPPLY VOLTAGE SEQUENCE

4.4.1 LCD panel signal processing board

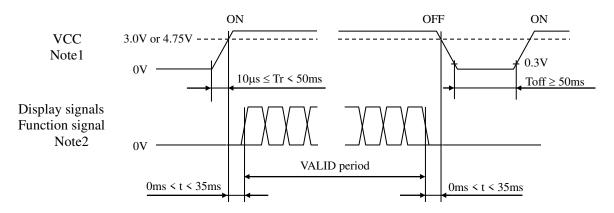

- Note1: If there is a voltage variation (voltage drop) at the rising edge of VCC below 3.0V in "VCC= 3.3V" or 4.75V in "VCC= 5.0V", there is a possibility that a product does not work due to a protection circuit.
- Note2: Display signals (CLK, Hsync, Vsync, DE, DATA (R0 to R5, G0 to G5, B0 to B5)) and function signal (DPS) must be set to Low or High-impedance, except the VALID period (See above sequence diagram), in order to avoid the circuitry damage. If some of display and function signals of this product are cut while this product is working, even if the signal input to it once again, it might not work normally. If a customer stops the display and function signals, VCC also must be shut down.
- 4.4.2 LED driver

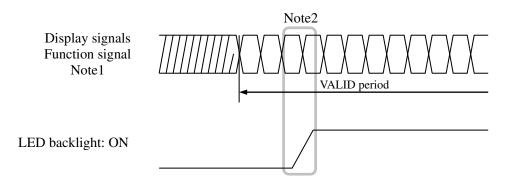

- Note1: These are the display and function signals for LCD panel signal processing board.
- Note2: The backlight should be turned on within the VALID period of display and function signals, in order to avoid unstable data display.

4.5 CONNECTIONS AND FUNCTIONS FOR INTERFACE PINS

4.5.1 LCD panel signal processing board

CN1 socket (LCD module side):DF9C-41P-1V (2*) (Hirose Electric Co., Ltd. (HRS))Adaptable plug:DF9-41S-1V (2*), DF9-41S-1V (3*) (Hirose Electric Co., Ltd. (HRS))

Pin No.	Symbol	Signal	Remarks
1	GND	Ground	Note1
2	CLK	Dot clock	-
3	GND	Ground	Note1
4	Hsync	Horizontal synchronous signal	
5	Vsync	Vertical synchronous signal	7 -
6	GND	Ground	
7	GND	Ground	Note1
8	GND	Ground	-
9	R0	Red data (LSB)	Least significant bit
10	R1	Red data	
11	R2	Red data	
12	GND	Ground	Note1
13	R3	Red data	
14	R4	Red data	7 -
15	R5	Red data (MSB)	Most significant bit
16	GND	Ground	
17	GND	Ground	Note1
18	GND	Ground	-
19	G0	Green data (LSB)	Least significant bit
20	G1	Green data	
21	G2	Green data	
22	GND	Ground	Note1
23	G3	Green data	
24	G4	Green data	
25	G5	Green data (MSB)	Most significant bit
26	GND	Ground	
27	GND	Ground	Note1
28	GND	Ground	-
29	B0	Blue data (LSB)	Least significant bit
30	B1	Blue data	
31	B2	Blue data	7 -
32	GND	Ground	Note1
33	B3	Blue data	
34	B4	Blue data	7 -
35	B5	Blue data (MSB)	Most significant bit
36	GND	Ground	Note1
37	DE	Selection of DE / Fixed mode	High or Open:Fixed modeData enable signal:DE mode
38	N. C.	-	Keep this pin Open.
39	VCC	Power supply	
40	VCC	Power supply	Note1
41	DPS	Selection of scan direction	High: Reverse scan Low or Open: Normal scan Note2


Note1: All VCC and GND terminals should be used without any non-connected lines. Note2: See "4.8 SCANNING DIRECTIONS".

4.5.2 Backlight

CN2 socket (LCD module side): SM10B-SRSS-TB (J.S.T. Mfg. Co., Ltd.) Adaptable plug: SHR-10V-S, SHR-10V-S-B (J.S.T. Mfg. Co., Ltd.)

Pin No.	Symbol	Signal	Remarks
1	A1	Anode1	-
2	K1	Cathode1	-
3	A2	Anode2	-
4	K2	Cathode2	-
5	A3	Anode3	-
6	K3	Cathode3	-
7	A4	Anode4	-
8	K4	Cathode4	-
9	A5	Anode5	-
10	K5	Cathode5	-

4.5.3 Positions of socket

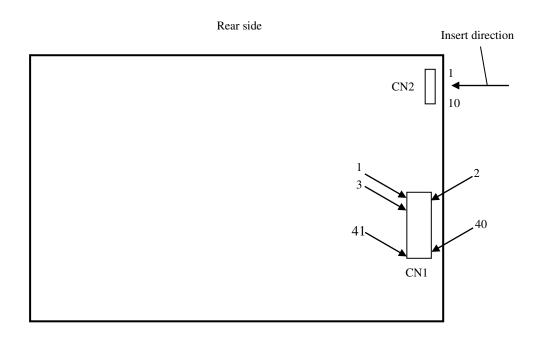

4.6 DISPLAY COLORS AND INPUT DATA SIGNALS

This product can display 262,144 colors with 64 gray scales. Also the relation between display colors and input data signals is as follows.

Dimi						Dat	a sigi	nal (O	: Low	level	, 1: H	igh le	evel)						
Displa	y colors	R 5	R 4	R 3	R 2	R 1	R 0	G5	G 4	G 3	G 2	G 1	G 0	B 5	B 4	B 3	B 2	B 1	B 0
	Black	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0
	Blue	0	0	0	0	0	0	0	0	0	0	0	0	1	1	1	1	1	1
ors	Red	1	1	1	1	1	1	0	0	0	0	0	0	0	0	0	0	0	0
Basic colors	Magenta	1	1	1	1	1	1	0	0	0	0	0	0	1	1	1	1	1	1
ısic	Green	0	0	0	0	0	0	1	1	1	1	1	1	0	0	0	0	0	0
Βį	Cyan	0	0	0	0	0	0	1	1	1	1	1	1	1	1	1	1	1	1
	Yellow	1	1	1	1	1	1	1	1	1	1	1	1	0	0	0	0	0	0
	White	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1
	Black	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0
e		0	0	0	0	0	1	0	0	0	0	0	0	0	0	0	0	0	0
Red gray scale	dark	0	0	0	0	1	0	0	0	0	0	0	0	0	0	0	0	0	0
ay	↑ I				:						:						:		
l gr	\downarrow				:						:						:		
Rec	bright	1	1	1	1	0	1	0	0	0	0	0	0	0	0	0	0	0	0
		1	1	1	1	1	0	0	0	0	0	0	0	0	0	0	0	0	0
	Red	1	1	1	1	1	1	0	0	0	0	0	0	0	0	0	0	0	0
	Black	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0
ale		0	0	0	0	0	0	0	0	0	0	0	1	0	0	0	0	0	0
/ sc	dark	0	0	0	0	0	0	0	0	0	0	1	0	0	0	0	0	0	0
gray	↑ ↓				:						:						•		
Green gray scale	•				:						:						:		0
Gre	bright	0	0	0	0	0	0	1	1	1	1	0	1	0	0	0	0	0	0
Ŭ	G	0	0	0	0	0	0	1	1	1	1	1	0	0	0	0	0	0	0
	Green	0	0	0	0	0	0	1	1	1	1	1	1	0	0	0	0	0	0
	Black	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0
ıle		0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	1
SCE	dark	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	1	0
Blue gray scale	$\uparrow \\ \downarrow$:						:						:		
le g	•	0	0	0	:	0	0	0	0	0	:	0	0	1	1	1	:	0	1
Blı	bright	0	0	0	0	0	0	0	0	0	0	0	0	1	1	1	1	0	1
	Dhua	0	0	0	0	0	0	0	0	0	0	0	0	1	1	1	1	1	0
	Blue	0	0	0	0	0	0	0	0	0	0	0	0	1	1	1	1	1	1

4.7 DISPLAY POSITIONS

The following table is the coordinates per pixel (See "4.8 SCANNING DIRECTIONS".).

C (0, 0)	В					
$\left(\begin{array}{cc} C(&0,&0) \end{array}\right)$	C(1, 0)	• • •	C(X, 0)	• • •	C(798, 0)	C(799, 0)
C(0, 1)	C(1, 1)	•••	C(X, 1)	•••	C(798, 1)	C(799, 1)
•	•	•	•	•	•	•
•	•	• • •	•	• • •	•	•••
•	•	•	•	•	•	•
C(0, Y)	C(1, Y)	•••	C(X, Y)	•••	C(798, Y)	C(799, Y)
•	•	•	•	•	•	•
•	•	• • •	•	• • •	•	•
•	•	•	•	•	•	•
C(0, 598)	C(1, 598)	• • •	C(X, 598)	•••	C(798, 598)	C(799, 598)
C(0, 599)	C(1, 599)	• • •	C(X, 599)	•••	C(798, 599)	C(799, 599)

4.8 SCANNING DIRECTIONS

The following figures are seen from a front view.

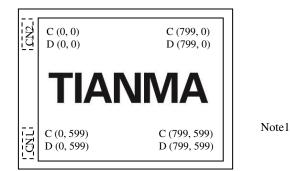


Figure1. Normal scan (DPS: Low or Open)

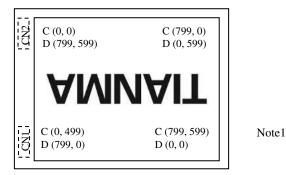


Figure2. Reverse scan (DPS: High)

Note1: Meaning of C (X, Y) and D (X, Y)


C (X, Y): The coordinates of the display position (See "4.7 DISPLAY POSITIONS".) D (X, Y): The data number of input signal for LCD panel signal processing board

4.9 INPUT SIGNAL TIMINGS


4.9.1 Outline of input signal timings

• Horizontal signal

Note1

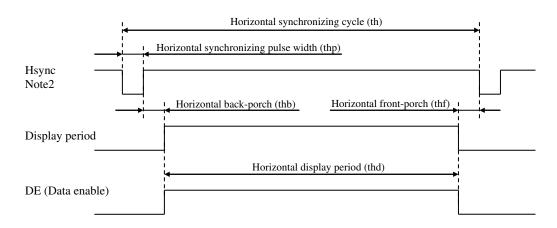

• Vertical signal

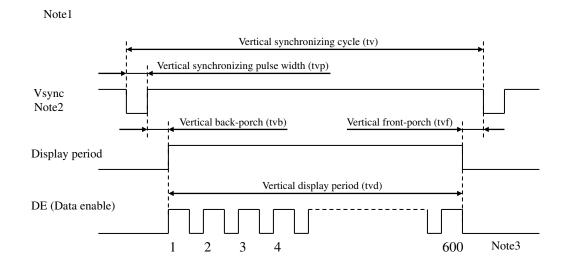

- Note1: This diagram indicates virtual signal for set up to timing.
- Note2: Fixed mode cannot be used while working of DE mode.

Note3: See "4.9.3 Input signal timing chart" for the pulse number.



4.9.2 Timing characteristics

(a) Fixed mode

i) Fixed m								(Note1)
	Parameter		Symbol	min.	typ.	max.	Unit	Remarks
	Freq	Frequency		34.0	38.362	42.0	MHz	26.067 ns (typ.)
CLK	Duty	v ratio	tcd	0.4	0.5	0.6	-	
	Rise time	e, Fall time	tcrf	-	-	10	ns	-
DATA		Setup time	tds	3	-	-	ns	
(R0-R5) (G0-G5)	CLK-DATA	Hold time	tdh	5	-	-	ns	-
(B0-B5)	Rise time	e, Fall time	tdrf	-	-	10	ns	
	G	ycle	th	24.0	26.693	30.1	μs	37.463 kHz (typ.)
		VCIE	ui		1,024		CLK	
	Displa	y period	thd		800		CLK	
	Front-porch		thf	24		CLK	-	
Hauna	Pulse width		thp	12	72	-	CLK	
Hsync	Back-porch		thb	-	128	188	CLK	
	Total of pulse wid	thp + thb	200			CLK	Note2	
	CLK- Hsync	Setup time	ths	3	-	-	ns	
		Hold time	thh	5	-	-	ns	-
	Rise time	e, Fall time	thrf	-	-	10	ns	
	Cy	tv	16.1	16.683	17.2	ms	59.94 Hz (typ.)	
		veie	ιv	625			Н	
	Displa	y period	tvd	600			Н	
	Front	-porch	tvf		1		Н	-
Vsync	Pulse	width	tvp	1	2	-	Н	
vsync	Back	Back-porch			22	23	Н	
	Total of pulse with	Total of pulse width and back-porch			24		Н	Note2
	Hsync-Vsync	Setup time	tvhs	3	-	-	ns	
	risyne-v syne	Hold time	tvhh	5	-	-	ns	-
	Rise time	Rise time, Fall time			-	10	ns	

Note1: Definition of parameters is as follows.

tc = 1CLK, tcd = tch/tc, th = 1H

Note2: Keep tvp + tvb and thp + thb within the table. If it is out of specification, display position will be shifted to right/left side or up/down.



(b) DE mode

DE mode							(Note	e1, Note2, Note3)	
	Parameter		Symbol	min.	typ.	max.	Unit	Remarks	
	Freq	1/tc	34.0	38.362	42.0	MHz	26.067 ns (typ.)		
CLK	Duty	y ratio	tcd	0.4	0.5	0.6	-		
	Rise time	e, Fall time	tcrf	-	-	10	ns	-	
DATA		Setup time	tds	3	-	-	ns		
(R0-R5) (G0-G5)	CLK-DAIA	Hold time	tdh	5	-	-	ns	-	
(B0-B5)	$\begin{array}{c ccccccccccccccccccccccccccccccccccc$	ns	ns						
	Horizontal	Crush	41-	24.0	26.693	30.1	μs	27.462 http://www.b	
		Cycle	ui	-	1,024	-	CLK	37.463 kHz (typ.)	
		Display period	thd		800		CLK	-	
		Cuele		16.1	16.683	17.2	ms	50.04 Uz (tup.)	
DE		Cycle	ιv	-	625	-	Н	59.94 Hz (typ.)	
	(one frame)	Display period	tvd		600		Н	-	
	CLK-DE	Setup time	tdes	3	-	-	ns		
	CLK-DE	Hold time	tdeh	5	-	-	ns	-	
	Rise time	e, Fall time	tderf	-	-	10	ns		

Note1: Definition of parameters is as follows.


tc = 1CLK, tcd = tch/tc, th = 1H

Note2: Hsync signal (Pin No.4 of CN1) and Vsync signal (Pin No.5 of CN1) are not used inside the product at DE mode. Do not keep these pins open to avoid noise problem.

Note3: Vertical cycle (tv) should be specified in integral multiple of Horizontal cycle (th).

4.9.3 Input signal timing chart


(a) Fixed mode

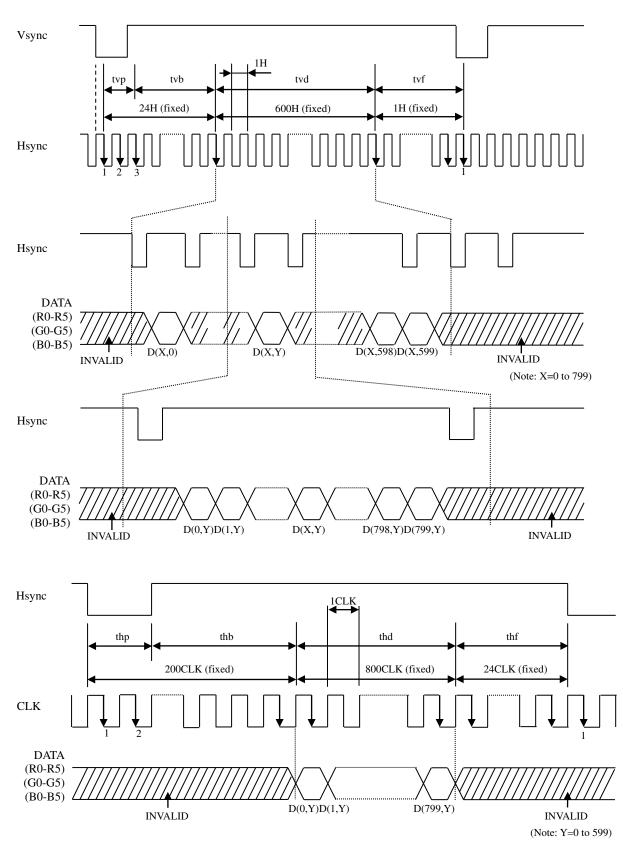




(b) DE mode

Horizontal timing

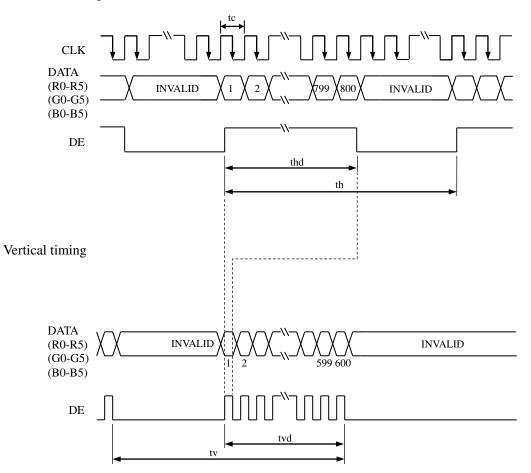



(c) Common item of Fixed mode and DE mode

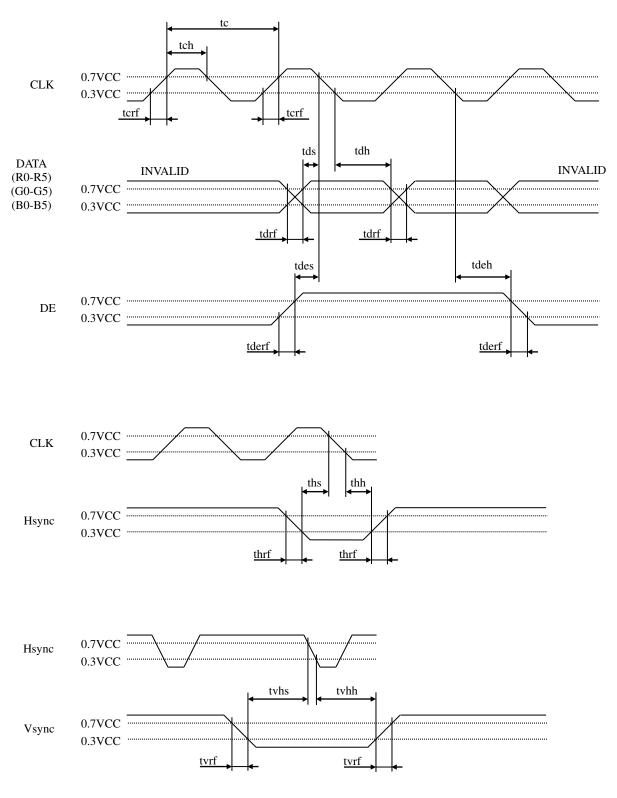

4.10 OPTICS

4.10.1 Optical characteristics

								(Note1	, Note2)
Paramete	neier i condition Sympol min Livb max unit i		Measuring instrument	Remarks					
Luminanc	ce	White at center $\theta R = 0^\circ, \ \theta L = 0^\circ, \ \theta U = 0^\circ, \ \theta D = 0^\circ$	L	550	900	-	cd/m ²	BM-5A or equivalent	-
Contrast ra	ıtio	White/Black at center $\theta R = 0^\circ, \ \theta L = 0^\circ, \ \theta U = 0^\circ, \ \theta D = 0^\circ$	CR	500	1000	-	-	BM-5A or equivalent	Note3
Luminance uni	formity	White $\theta R = 0^\circ, \ \theta L = 0^\circ, \ \theta U = 0^\circ, \ \theta D = 0^\circ$	LU	-	1.25	1.4	-	BM-5A or equivalent	Note4
	White	x coordinate	Wx	0.263	0.313	0.363	-		
	white	y coordinate	Wy	0.279	0.329	0.379	-		
	Red	x coordinate	Rx	-	0.565	-	-		
Characterister		y coordinate	Ry	-	0.340	-	-		
Chromaticity	Green	x coordinate	Gx	-	0.350	-	-	SR-3 or	NI-4-5
		y coordinate	Gy	-	0.540	-	-	equivalent	Note5
	Dlas	x coordinate	Bx	-	0.155	-	-		
	Blue	y coordinate	By	-	0.130	-	-		
Color gam	nut	$\theta R = 0^\circ, \ \theta L = 0^\circ, \ \theta U = 0^\circ, \ \theta D = 0^\circ$ at center, against NTSC color space	С	35	40	-	%		
D +		White to Black	Ton	-	3	5	ms	BM-5A or	Note6
Response ti	ime	Black to White	Toff	-	15	21	ms	equivalent	Note7
	Right	$\theta U=0^{\circ}, \ \theta D=0^{\circ}, \ CR \ge 10$	θR	70	80	-	0		
Viewing angle	Left	$\theta U=0^{\circ}, \ \theta D=0^{\circ}, \ CR \ge 10$	θL	70	80	-	0	EZ	Note8
viewing angle	Up	$\theta R = 0^{\circ}, \ \theta L = 0^{\circ}, \ CR \ge 10$	θU	70	80	-	0	Contrast	noteo
	Down	$\theta R=0^{\circ}, \ \theta L=0^{\circ}, \ CR \ge 10$	θD	70	80	-	0		


Note1: These are initial characteristics.

Note2: Measurement conditions are as follows.

Ta= 25°C, VCC= 3.3V, IL= 50 mA/One circuit, Display mode: SVGA,

Horizontal cycle= 1/37.463kHz, Vertical cycle= 1/59.94Hz, DPS= Low or Open: Normal scan

Optical characteristics are measured at luminance saturation 20minutes after the product works in the dark room. Also measurement methods are as follows.

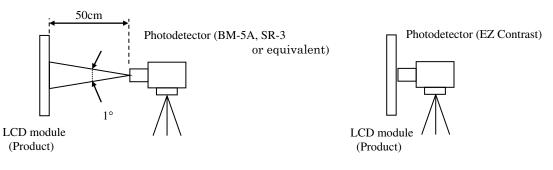

- Note3: See "4.10.2 Definition of contrast ratio".
- Note4: See "4.10.3 Definition of luminance uniformity".
- Note5: These coordinates are found on CIE 1931 chromaticity diagram.
- Note6: Product surface temperature: TopF= 29°C
- Note7: See "4.10.4 Definition of response times".
- Note8: See "4.10.5 Definition of viewing angles".

4.10.2 Definition of contrast ratio

The contrast ratio is calculated by using the following formula.

Contrast ratio (CR) = Luminance of white screen Luminance of black screen

4.10.3 Definition of luminance uniformity

The luminance uniformity is calculated by using following formula.


 $Luminance uniformity (LU) = \frac{Maximum luminance from ① to ⑤}{Minimum luminance from ① to ⑤}$

The luminance is measured at near the 5 points shown below.


	133	400	667
100	•		2
300		3	
500			

4.10.4 Definition of response times

Response time is measured at the time when the luminance changes from "white" to "black", or "black" to "white" on the same screen point, by photo-detector. Ton is the time when the luminance changes from 90% down to 10%. Also Toff is the time when the luminance changes from 10% up to 90% (See the following diagram.).

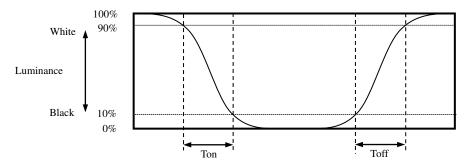

4.10.5 Definition of viewing angles

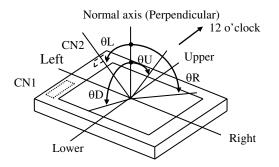

5. ESTIMATED LUMINANCE LIFETIME

The luminance lifetime is the time from initial luminance to half-luminance.

This lifetime is the estimated value, and is not guarantee value.

	Condition	Estimated luminance lifetime (Life time expectancy) Note1, Note2, Note3	Unit
LED	25°C (Ambient temperature of the product) Continuous operation, IL= 50mA/One circuit	70,000	h
elementary substance		60,000	h

Note1: Life time expectancy is mean time to half-luminance.

Note2: Estimated luminance lifetime is not the value for LCD module but the value for LED elementary substance.


Note3: By ambient temperature, the lifetime changes particularly. Especially, in case the product works under high temperature environment, the lifetime becomes short.



6. RELIABILITY TESTS

Test item	Condition	Judgment Note1		
High temperature and humidity (Operation)	 60 ± 2°C, RH= 90%, 240hours Display data is black. 			
High temperature (Operation)	 80 ± 3°C, 240hours Display data is black. 			
Heat cycle (Operation)	 -30 ± 3°C1hour 80 ± 3°C1hour 50cycles, 4 hours/cycle Display data is black. 			
Thermal shock (Non operation)	 1 -30 ± 3°C30minutes 80 ± 3°C30minutes 2 100cycles, 1hour/cycle 3 Temperature transition time is within 5 minutes. 	No display malfunctions		
ESD (Operation)	 150pF, 150Ω, ±10kV 9 places on a panel surface Note2 10 times each place at 1 sec interval 			
Dust (Operation)	 Sample dust: No. 15 (by JIS-Z8901) 15 seconds stir 8 times repeat at 1 hour interval 			
Vibration ① 5 to 100Hz, 19.6m/s² (Non operation) ③ X, Y, Z directions ④ 120 times each direction		No display malfunctions		
Mechanical shock (Non operation)	 539m/ s², 11ms ±X, ±Y, ±Z directions 5 times each direction 	No physical damages		

Note1: Display and appearance are checked under environmental conditions equivalent to the inspection conditions of defect criteria. Note2: See the following figure for discharge points.

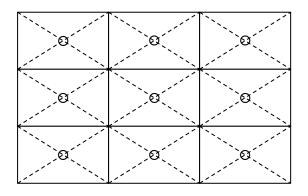

7. PRECAUTIONS

7.1 MEANING OF CAUTION SIGNS

The following caution signs have very important meaning. **Be sure to read "7.2 CAUTIONS" and "7.3 ATTENTIONS"!**



This sign has the meaning that a customer will be injured or the product will sustain damage if the customer practices wrong operations.



This sign has the meaning that a customer will be injured if the customer practices wrong operations.

7.2 CAUTIONS



Do not shock and press the LCD panel and the backlight! There is a danger of breaking, because they are made of glass. (Shock: Equal to or no greater than 539m/s² and equal to or no greater than 11ms, Pressure: Equal to or no greater than 19.6 N (φ16mm jig))



7.3.1 Handling of the product

- ① Take hold of both ends without touching the circuit board when the product (LCD module) is picked up from inner packing box to avoid broken down or misadjustment, because of stress to mounting parts on the circuit board.
- 2 When the product is put on the table temporarily, display surface must be placed downward.
- ③ When handling the product, take the measures of electrostatic discharge with such as earth band, ionic shower and so on, because the product may be damaged by electrostatic.
- (4) The torque for product mounting screws must never exceed 0.23N·m. Higher torque might result in distortion of the bezel. And the length of product mounting screws must be ≤ 2.0 mm.
- (5) The product must be installed using mounting holes without undue stress such as bends or twist (See outline drawings). And do not add undue stress to any portion (such as bezel flat area). Bends or twist described above and undue stress to any portion may cause display mura.
- ⁽⁶⁾ Do not press or rub on the sensitive product surface. When cleaning the product surface, wipe it with a soft dry cloth.
- \bigcirc Do not push or pull the interface connectors while the product is working.
- (8) When handling the product, use of an original protection sheet on the product surface (polarizer) is recommended for protection of product surface. Adhesive type protection sheet may change color or characteristics of the polarizer.
- (9) Usually liquid crystals don't leak through the breakage of glasses because of the surface tension of thin layer and the construction of LCD panel. But, if you contact with liquid crystal by any chance, please wash it away with soap and water.

7.3.2 Environment

- ① Do not operate or store in high temperature, high humidity, dewdrop atmosphere or corrosive gases. Keep the product in packing box with antistatic pouch in room temperature to avoid dusts and sunlight, when storing the product.
- ② In order to prevent dew condensation occurred by temperature difference, the product packing box must be opened after enough time being left under the environment of an unpacking room. Evaluate the storage time sufficiently because dew condensation is affected by the environmental temperature and humidity. Recommended leaving time: 6 hours or more with the original packing state after a customer receives the package)
- ③ Do not operate in high magnetic field. If not, circuit boards may be broken.
- ④ This product is not designed as radiation hardened.

7.3.3 Characteristics

The following items are neither defects nor failures.

- ① Characteristics of the LCD (such as response time, luminance, color uniformity and so on) may be changed depending on ambient temperature. If the product is stored under condition of low temperature for a long time, it may cause display mura. In this case, the product should be operated after enough time being left under condition of operating temperature.
- ⁽²⁾ Display mura, flickering, vertical streams or tiny spots may be observed depending on display patterns.
- ③ Do not display the fixed pattern for a long time because it may cause image sticking. Use a screen saver, if the fixed pattern is displayed on the screen.
- (4) The display color may be changed depending on viewing angle because of the use of condenser sheet in the backlight.
- ⁽⁵⁾ Optical characteristics may be changed depending on input signal timings.

7.3.4 Others

- ① All GND and VCC terminals should be used without any non-connected lines.
- ② Do not disassemble a product or adjust variable resistors.
- ③ See "REPLACEMENT MANUAL FOR LAMP HOLDER SET", when replacing lamp holder set.
- ④ Pack the product with the original shipping package, in order to avoid any damages during transportation, when returning the product to TMJ for repairing and so on.
- ⁽⁵⁾ The information of China RoHS (II) six hazardous substances or elements in this product is as follows.

	China RoHS (II) six hazardous substances or elements									
Lead (Pb)	Mercury (Hg)	Cadmium (Cd)	Hexavalent Chromium (Cr VI)	Polybrominated Biphenys (PBB)	Polybrominated Biphenyl Ethers (PBDE)					
×	0	0	0	0	0					


Note1: O: This indicates that the poisonous or harmful material in all the homogeneous materials for this part is equal or below the limitation level of GB/T26572-2011 standard regulation.

 \times : This indicates that the poisonous or harmful material in all the homogeneous materials for this part is above the limitation level of GB/T26572-2011 standard regulation.

MTIANMA


8. OUTLINE DRAWINGS

8.1 FRONT VIEW

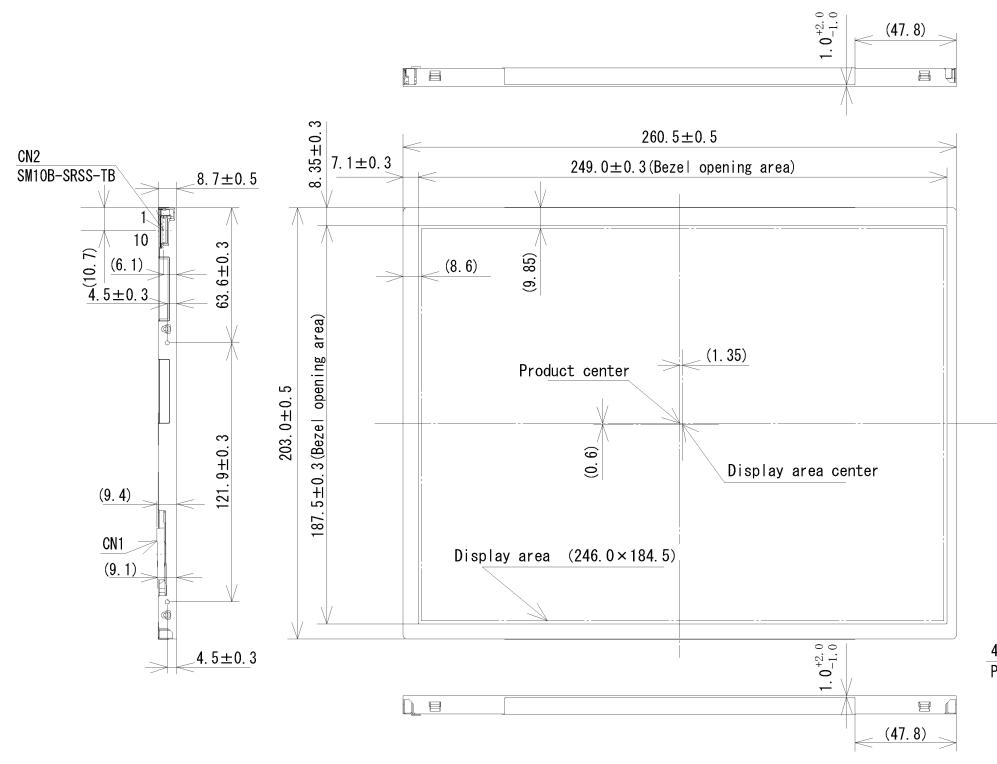


Note1: The values in parentheses are for reference.

Note2: The torque for product mounting screws must never exceed 0.23 N·m. And the length of product mounting screws must be ≤ 2.0 mm.

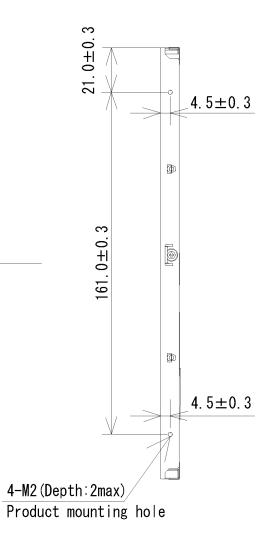

Unit: mm


8.2 REAR VIEW

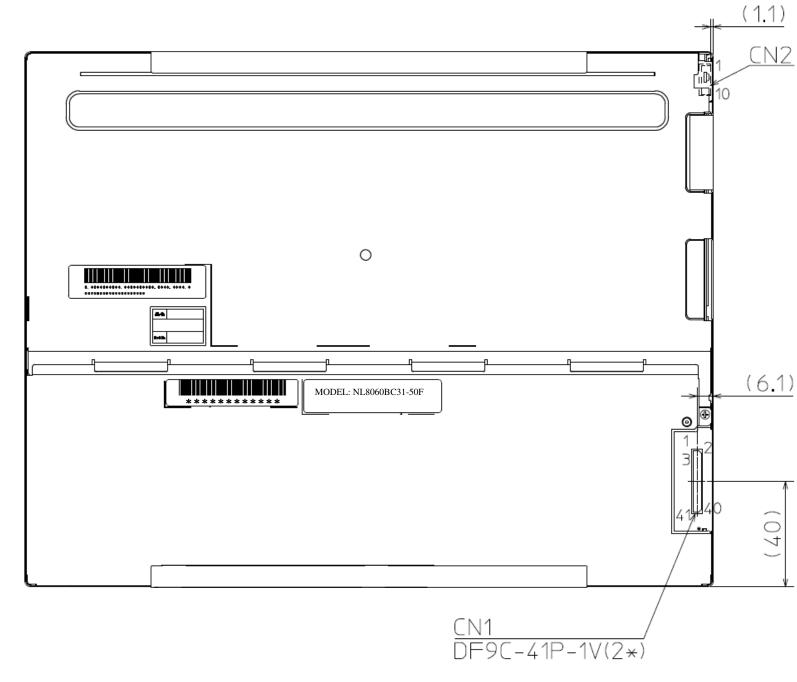

Note1: The values in parentheses are for reference.

Note2: The torque for product mounting screws must never exceed 0.23 N·m. And the length of product mounting screws must be ≤ 2.0 mm.

NL8060BC31-50F

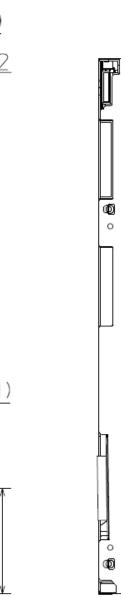

Unit: mm

DATA MODUL



ALL TECHNOLOGIES. ALL COMPETENCIES. ONE SPECIALIST.



DATA MODUL AG Landsberger Straße 322 DE-80687 Munich Phone: +49-89-56017-0 DATA MODUL WEIKERSHEIM GMBH

Lindenstraße 8 DE-97990 Weikersheim Phone: +49-7934-101-0



More information and worldwide locations can be found at

www.data-modul.com