



# **Specification**

#### COM70H7M53FLC

7.0" - 800 x 480 - LVDS

Spec Revision: 1.0 Revision Date: 21.02.2025

Note: This specification is subject to change without prior notice

### **Specifications for**

### **Blanview TFT-LCD Monitor**

(7.0" WVGA 800 x RGB x 480 Landscape)
Sunlight readable TFT-LCD Monitor

Version 1.0

(Please be sure to check the specifications latest version.)

#### MODEL COM70H7M53FLC

Customer's Approval	
Signature :	
Name :	
Section :	
Title:	
Date :	
ORTUSTEC	H
	TOPPAN INC. Electronics Division Technological Development Department IV
	Approved by Epuchi
	Checked by  J. Matsumak!
	Prepared by

Issue:Feb.21,2025

#### Version History

		Page		Description
0.0	Feb.16,2024	-	-	Tentative issue
<sub>A</sub> 0.1	Feb.21,2024	P.23		11. Reliability Test
<u></u>			Correct	Test condition (Vibration test / Impact test)
0.2	Jan.17,2025	P.1		Cover
			Add	Model specification
/B ×17			Change	Department name
		P.3		Contents
			Add	Item
		P.5		2.1 Features of the Product
			Change	Note
		P.6		<features blanview="" of=""></features>
			Change	Note
		P.7		3.1 Dimensions
			Change	Weight
		P.11		5. Absolute Maximum Rating
			Add	Rating
		P.11,12		7.1 DC Characteristics
			Add	Rating
		P.19		9.1 Optical Characteristics
			Add	Specification
				9.2 About Sunlight readable
			Add	Item
		P.20		9.3 Temperature Characteristics
			Add	Specification
		P.21		10.1 Defective Display and Screen Quality
			Add	Signal condition
			Add	Backlight
		P.25		12. Packing Specifications
			Add	Packing Specifications
		P.28		13.4 Storage Condition for Shipping Cartons
			Add	Maximum piling up
		P.29		13.5 Precautions for Peeling off the Protective film
			Add	Work Method
		P.30		APPENDIX (1. Measurement Condition )
			Add	Backlight
1.0	Feb.21,2025	-	-	First issue
		P.11		7.1 DC Characteristics
,			Change	Rating
∕Ĉ\ ×4		P.19		9.1 Optical Characteristics
			Add	Ratng / White Chromaticity Range
		P.21		10.1 Defective Display and Screen Quality
			Add	Screen Quality
		P.23		11. Reliability Test
			Add	number of failures / number of examinations
			Add	Lightfastness
	-			

#### Contents

1.	Appli	cation	• • • • • • • • •	4
2.	Outli	ne Specifications		
	2.1	Features of the Product	• • • • • • • •	5
	2.2	Display Method	• • • • • • • •	5
3.	Dime	ensions and Shape		
	3.1	Dimensions	• • • • • • • •	7
	3.2	Outward Form	• • • • • • • •	8
	3.3	Serial № print (S-print)	• • • • • • • •	9
4.	Pin A	ssignment	• • • • • • • • • • • • • • • • • • • •	10
5.	Abso	lute Maximum Rating	• • • • • • • • • • • • • • • • • • • •	11
6.	Reco	mmended Operating Conditions	• • • • • • • • • • • • • • • • • • • •	11
7.	Elect	rical Characteristics		
	7.1	DC Characteristics	• • • • • • • • • • • • • • • • • • • •	11
	7.2	LVDS interface	• • • • • • • • • • • • • • • • • • • •	13
	7.3	Input Timing	• • • • • • • • • • • • • • • • • • • •	16
	7.4	Power ON/OFF Sequence	• • • • • • • • • • • • • • • • • • • •	17
8.	LED	Circuit	• • • • • • • • • • • • • • • • • • • •	18
9.	Char	acteristics		
	9.1	Optical Characteristics	• • • • • • • • •	19
	9.2	About Sunlight readable	• • • • • • • • •	19
	9.3	Temperature Characteristics	• • • • • • • • • • • • • • • • • • • •	20
10.	Crite	ria of Judgment		
	10.1	Defective Display and Screen Quality	• • • • • • • • •	21
	10.2	Screen and Other Appearance	• • • • • • • • •	22
11.	Relia	bility Test	• • • • • • • • •	23
12.	Pack	ing Specifications	• • • • • • • • •	25
13.	Hand	lling Instruction		
	13.1	Cautions for Handling LCD panels	• • • • • • • • •	26
	13.2	Precautions for Handling	• • • • • • • •	27
	13.3	Precautions for Operation	• • • • • • • • • • • • • • • • • • • •	27
	13.4	Storage Condition for Shipping Cartons	• • • • • • • •	28
	13.5	Precautions for Peeling off		
		the Protective film	• • • • • • • • • • • • • • • • • • • •	29
	13.6	Warranty	•••••	29
ΑF	PPEN	DIX	•••••	30

#### 1. Application

This Specification is applicable to 178.0 mm (7.0 inch) Blanview TFT-LCD monitor for non-military use.

- TOPPAN makes no warranty or assume no liability that use of this Product and/or any information including drawings in this Specification by Purchaser is not infringing any patent or other intellectual property rights owned by third parties, and TOPPAN shall not grant to Purchaser any right to use any patent or other intellectual property rights owned by third parties. Since this Specification contains TOPPAN's confidential information and copy right, Purchaser shall use them with high degree of care to prevent any unauthorized use, disclosure, duplication, publication or dissemination of TOPPAN's confidential information and copy right.
- If Purchaser intends to use this Products for an application which requires higher level of reliability
   and/or safety in functionality and/or accuracy such as transport equipment (aircraft, train, automobile, etc.),
   disaster-prevention/security equipment or various safety equipment,
   Purchaser shall consult TOPPAN on such use in advance.
- This Product shall not be used for application which requires extremely higher level of reliability and/or safety such as aerospace equipment, telecommunication equipment for trunk lines, control equipment for nuclear facilities or life-support medical equipment.
- It must be noted as an mechanical design manner, especial attention in housing design to prevent arcuation/flexure caused by stress to the LCD module shall be considered.
- TOPPAN assumes no liability for any damage resulting from misuse, abuse, and/or miss-operation of the Product deviating from the operating conditions and precautions described in the Specification.
- It shall be mutually conferred if nonconforming defect which result from unspecified cause in this specification arises.
- If any issue arises as to information provided in this Specification or any other information, TOPPAN and Purchaser shall discuss them in good faith and seek solution.
- TOPPAN assumes no liability for defects such as electrostatic discharge failure occurred during peeling off the protective film or Purchaser's assembly process.

⊚ This Product is compatible for RoHS(2.0) directive.


Object substance	Maximum content [ppm]
Cadmium and its compound	100
Hexavalent Chromium Compound	1000
Lead & Lead compound	1000
Mercury & Mercury compound	1000
Polybrominated biphenyl series (PBB series)	1000
Polybrominated biphenyl ether series (PBDE series)	1000
Bis(2-ethylhexyl)phthalate series(DEHP series)	1000
Butyl benzyl phthalate series(BBP series)	1000
Dibutyl phthalate series(DBP series)	1000
Diisobutyl phthalate series(DIBP series)	1000

Issue:Feb.21,2025

#### 2. Outline Specifications


#### 2.1 Features of the Product

- 7.0 inch diagonal display, 800 x RGB [H] x 480 [V] dots.
- 16.7 M colors (8-bit) / 262 K colors (6-bit).
- 3.3V voltage single power source.
- Timing generator [TG], Counter-electrode driving circuitry, Built-in power supply circuit.
- Long life & High bright white LED back-light.
- Blanview TFT-LCD, improved outdoor readability.

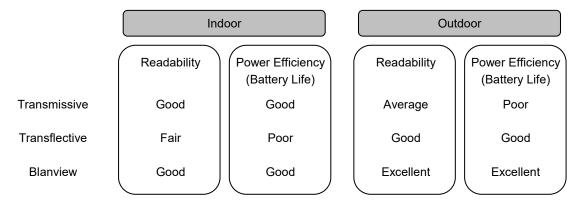

#### 2.2 Display Method

Items	Specifications	Remarks
Display type	FFS, 16.7 M colors. / 262 k colors.	
	Blanview, Normally black.	
Driving method	a-Si TFT Active matrix.	
	Line-scanning, Non-interlace.	
Dot arrangement	RGB stripe arrangement.	Refer to "Dot arrangement"
Signal input method	8-bit / 6-bit LVDS interface (VESA format)	
Backlight type	Long life & High bright white LED.	
NTSC ratio	50%	

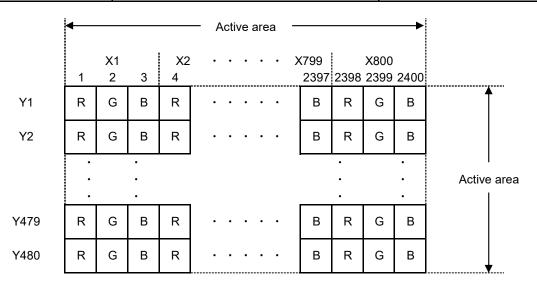


Dot arrangement (FPC cable placed down side)

Issue:Feb.21,2025

#### SPECIFICATIONS № 23TLM041


#### <Features of Blanview>

Blanview is a TFT-LCD monitor that achieves sunlight readability with low power consumption.

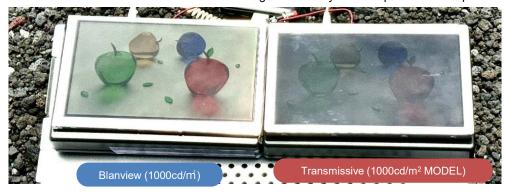

\*Display image comparison photo outdoors ( at 100,000lx )


- \* When compared at the same power consumption, Blanview's contrast at 100,000lx is more than two times higher than that of a transmissive LCD (1000cd/m² model). Blanview's contrast is 17.5, while that of a transmissive LCD is 7.5. Sunlight readability is Good with a contrast of 8 or higher on the TOPPAN index. (Contrast at 100,000lx is reference data.)
- Backlight power consumption required to assure visibility. (equivalent to 7.0"WVGA)

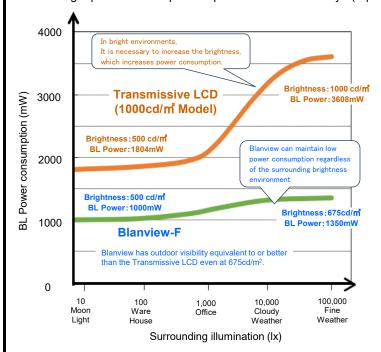

#### Sunlight Readable / BL Power comparison

	Sunlight Readable	BL Power	
Transmissive LCD (1000cd/㎡ Model)	Average	Poor	
Blanview-F	Excellent	Excellent	

In bright environment, other companies' products require higher brightness, which increases power consumption, However TOPPAN' Blanview can maintain low power consumption without increasing brightness (visibility is not easily affected by the environment).



\*Observation image with thermograph

Transmissive LCD (1000cd/m² MODEL) consume a lot of power, which places a large load on the customer's power circuit, causing problems such as heat generation.


Blanview has low power consumption, so it places a low load on the customer's power supply circuit and does not cause any harmful effects such as heat generation.

Issue:Feb.21,2025

#### 3. Dimensions and Shape

#### 3.1 Dimensions

Items	Specifications	Unit	Remarks
Outline dimensions	169.80[H] × 109.70[V] × 6.20[D]	mm	Exclude FPC cable and
			parts on FPC.
Active area	152.40[H] × 91.44[V]	mm	178.0 mm diagonal
Number of dots	2400[H] × 480[V]	dot	
Dot pitch	63.5[H] × 190.5[V]	um	
Surface hardness of the polarizer	3H	Н	4.90N
			Reference judgment
			standard:JIS-K5600
Weight	174.0	g	Include FPC cable

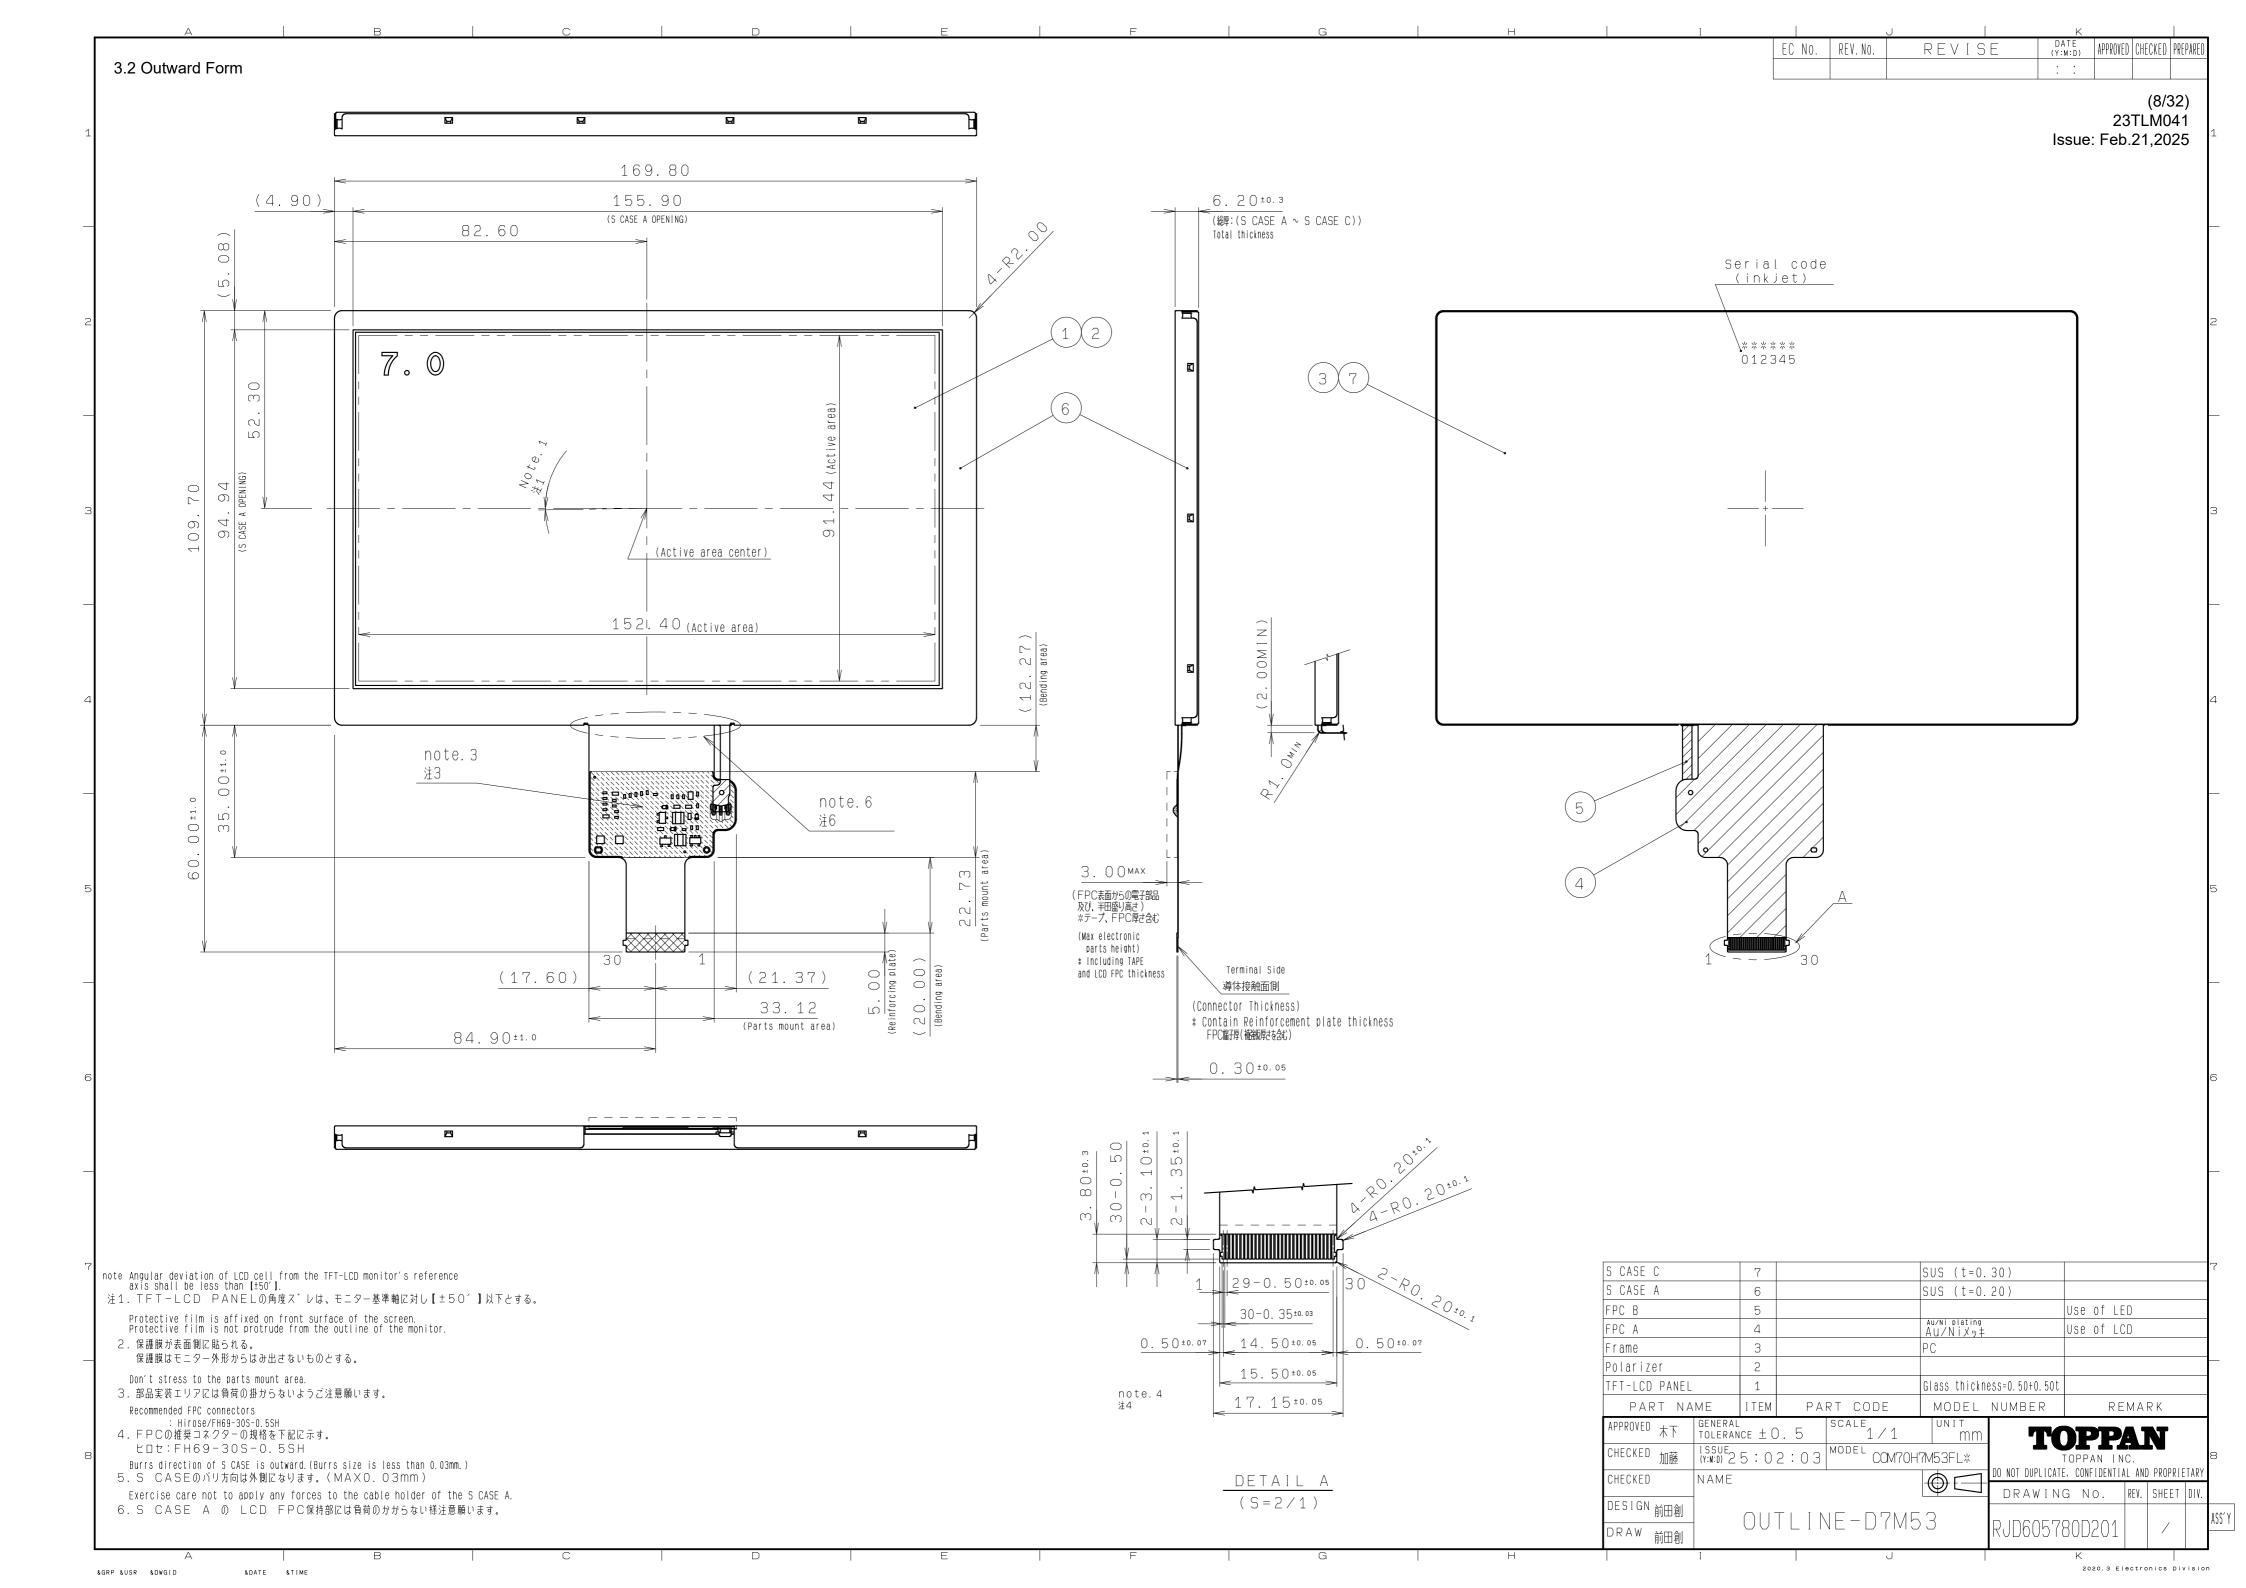

Issue:Feb.21,2025

#### 3.3 Serial Nº print (S-print)

#### 3.3.1 Display Items

S-print indicates the least significant digit of manufacture year (1digit), manufacture month with below alphabet (1letter), model code (5characters), serial number (6digits).

\* Contents of Display

* *		****	*****
_	_		
а	b	С	d

	Contents of display							
а	The least significant digit of manufacture year							
b	Manufacture month	Jan-A	May-E	Sep-I				
		Feb-B Jun-F Oct-J						
		Mar-C Jul-G Nov-K						
		Apr-D Aug-H Dec-L						
С	Model code	70BPC (Made in Japan)						
		70BQC (Made in Malaysia)						
d	Serial number							

- \* Example of indication of Serial № print (S-print)
- · Made in Japan

5L70BPC000125

means "manufactured in December 2025, 7.0 inch, BP type, C specifications, serial number 000125"

· Made in Malaysia

5L70BQC000125

means "manufactured in December 2025, 7.0 inch, BQ type, C specifications, serial number 000125"

3.3.2 Location of Serial № print (S-print)

Refer to 3.2 "Outward Form".

#### 3.3.3 Others

Please note that it is likely to disappear with an organic solvent about the Serial print.

### 4. Pin Assignment

No.	Symbol	Function	I/O
1	BLH	LED drive power source. (Anode side)	Р
2	BLL2	LED drive power source . (Cathode side 2)	Р
3	BLL1	LED drive power source . (Cathode side 1)	Р
4	GND	Ground	Р
5	VDD	Power supply input.	Р
6	VDD	Power supply input.	Р
7	TEST1	TEST input (Connect to VDD)	I
8	TEST2	TEST input (Connect to GND)	I
9	TEST3	TEST input (Connect to GND)	I
10	NC	No connection	-
11	UL/DR	Up & Left / Down & Right switching terminal ( Low : DR , High or NC : UL )	ı
12	IM	6 / 8 bit (based on VESA ) switching terminal ( Low : 6bit , High or NC : 8bit	I
13	STBYB	Standby signal (Low:Standby operation,High:Normal operation)	I
14	GND	Ground	Р
15	R0-	LVDS DATA0(-)	1
16	R0+	LVDS DATA0(+)	- 1
17	GND	Ground	Р
18	R1-	LVDS DATA1(-)	- 1
19	R1+	LVDS DATA1(+)	- 1
20	GND	Ground	Р
21	CLK-	LVDS CLK(-)	1
22	CLK+	LVDS CLK(+)	- 1
23	GND	Ground	Р
24	R2-	LVDS DATA2(-)	I
25	R2+	LVDS DATA2(+)	- 1
26	GND	Ground	Р
27	R3-	LVDS DATA3(-)	I
28	R3+	LVDS DATA3(+)	- 1
29	GND	Ground	Р
30	NC	No connection	-

- Recommended connector : HIROSE ELECTRIC CO., LTD. FH69series FH69-30S-0.5SH
- Please make sure to check a consistency between pin assignment in "3.2 Outward Form" and your connector pin assignment when designing your circuit.

  Inconsistency in input signal assignment may cause a malfunction.
- Since FPC cable has gold plated terminals, gilt finish contact shoe connector is recommended.

Issue:Feb.21,2025

#### SPECIFICATIONS № 23TLM041

#### 5. Absolute Maximum Rating

GND=0V

Item	Symbol	Condition	Condition Rating		Unit	Applicable terminal
iteiii	Symbol	Condition	MIN	MAX	Offic	Applicable terminal
Supply voltage	VDD		-0.3	3.9	<b>V</b>	VDD
Input voltage for logic	VI		-0.3	VDD+0.3	٧	UL/DR, IM, STBYB
Forward current	IL1,IL2			45	mA	BLH-BLL1/BLL2
Storage temperature range	Tstg		-40	95	°C	

#### 6. Recommended Operating Conditions

GND=0V

Item	Symbol	Condition		Rating		Unit	Applicable terminal
item	Syllibol	Condition	MIN	TYP	MAX	Offic	Applicable terrilinal
Supply voltage	VDD		3.0	3.3	3.6	V	VDD
Input voltage for logic	VI		0		VDD	V	UL/DR , IM , STBYB
Operational temperature range	Тор	Note1	-30	+25	+85	°C	Panel surface temperature

Note1: This monitor is operatable in this temperature range. With regard to optical characteristics, refer to Item 9."Characteristics".

#### 7. Electrical Characteristics

### 

(Unless otherwise noted, Ta=25 °C,VDD=3.3V,GND=0V)

Item	Symbol	Condition		Rating		Unit	Applicable terminal
item	Symbol	Condition	MIN	TYP	MAX	Offic	Applicable terrilinal
High Level Input Voltage	VIH		0.7VDD	_	VDD	V	UL/DR,IM,STBYB
Low Level Input Voltage	VIL		0	_	0.3VDD	V	
Pull up/down	RI		90	100	110		Pull up : IM , STBYB
resistor	IXI		45	50	55	kΩ	Pull up : UL/DR
Operating Current	IDD	Color Bar fclk = 27.2 MHz	_	65	130	mA	VDD

#### (BackLight)

Item	Symbol	nbol Condition Rating		Unit	Applicable terminal		
item	Symbol	Condition	MIN	TYP	MAX	Offic	Applicable terminal
Forward current	IL1	Ta=25 °C , Note1		23.0	70.0	mΑ	BLH - BLL1
I Orward Current	IL2	Ta-25 C, Note I		23.0	70.0	mA	BLH - BLL2
Forward voltage	VF1	Ta=25 ℃		22.04	24.44	V	BLH - BLL1
*Reference value	VF2	IL1=IL2=23.0 mA		22.04	24.44	V	BLH - BLL2
Estimated Life of LED	LL	Ta=25 °C Note2 IL1=IL2=23.0 mA		50,000		hrs	

Note1: - Please control so that each current does not vary (IL1 = IL2).

Note2: - The lifetime of the LED is defined as a period till the brightness of the LED decreases to the half of its initial value.


- This figure is given as a reference purpose only, and not as a guarantee.
- This figure is estimated for an LED operating alone.
  As the performance of an LED may differ when assembled as a monitor
- Estimated lifetime could vary on a different temperature and usually higher temperature could reduce the life significantly.

#### 7.2 LVDS interface

#### 7.2.1 LVDS DC Characteristics

(Unless otherwise noted, Ta=25 °C,VDD=3.3V,GND=0V)


							, ,	
Item	Symbol	Condition		Rating	·	Unit	Applicable terminal	
Item	Syllibol	Condition	MIN	TYP	MAX		Applicable terminal	
Differential input high threshold voltage	Rxvth	Rxvcm=1.2V	-	-	0.2	V	CLK+、CLK- R0+、R0-、R1+、R1-	
Differential input low threshold voltage	Rxvtl		-0.2	-	-	V	R2+、R2-、R3+、R3-	
Differential input common Mode voltage	Rxvcm		VID /2	-	VDD-1.2- VID /2	V		
Differential input voltage	$ V_{ID} $		0.2	-	0.6	V		
Differential input leakage current	$RV_{leak}$		-10	_	+10	μΑ		

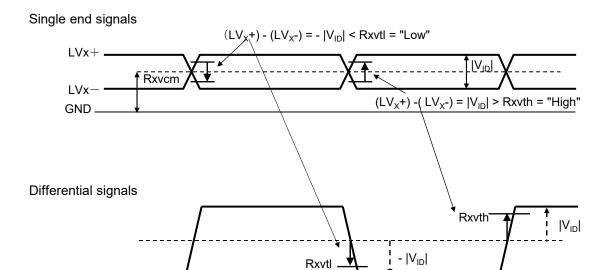



#### 7.2.2 LVDS AC Characteristics

(Unless otherwise noted, Ta=25 °C, VDD=3.3V, GND=0V)

		1	,	•	· '	
Item	Symbol		Rating	ating		
item	Syllibol	MIN	TYP	MAX	Unit	
CLK Frequency	f clk	25.2	27.2	30.5	MHz	
1 data bit time	UI	-	1/7	-	1/fclk	
CLK High time	T LVCH	-	4/(7*fclk)	-	ns	
CLK Low time	T LVCL	-	3/(7*fclk)	-	ns	
Position 1	Tpos_1	-0.21	0	0.21	UI	
Position 0	Tpos_0	0.79	1	1.21	UI	
Position 6	Tpos_6	1.79	2	2.21	UI	
Position 5	Tpos_5	2.79	3	3.21	UI	
Position 4	Tpos_4	3.79	4	4.21	UI	
Position 3	Tpos_3	4.79	5	5.21	UI	
Position 2	Tpos_2	5.79	6	6.21	UI	
Reciever Strobe Position 7	TEYEW	0.58	-	-	UI	
Reciever Strobe Position 8	TEX	1	-	0.21	UI	

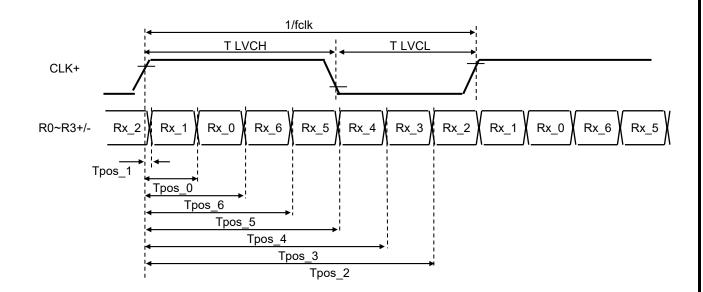

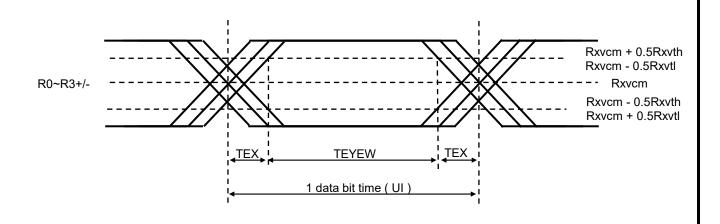

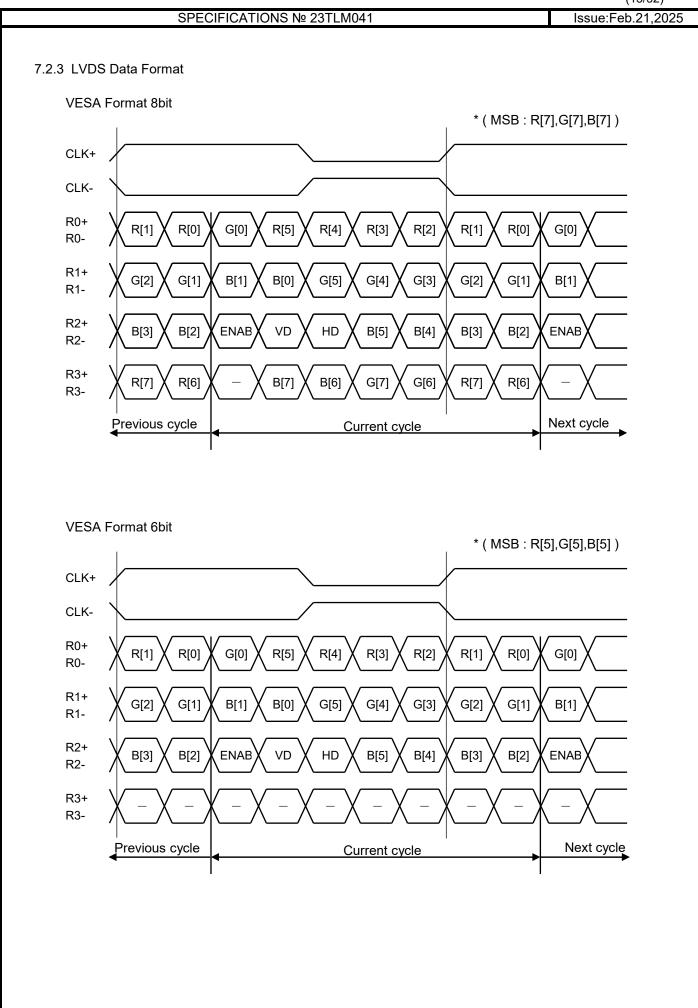



Issue:Feb.21,2025

#### 7.3 Input timing

Item	Cumbal		Rating		Unit	Signal ( * )
item	Symbol	MIN	TYP	MAX	Offic	Signal ( * )
CLK frequency	fCLK	25.2	27.2	30.5	MHz	CLK
VD frequency	fVD	-	60	-	Hz	VD
1 vertical field	tv	490	528	552	Н	
VD pulse width	tvp	1	2	66	Н	1
VD back porch	tvb	5	10	67	Н	VD,HD,ENAB
VD front porch	tvf	5	38	67	Н	R[7:0],G[7:0],B[7:0]
Vertical valid data	tvdp		480		Н	1
HD frequency	fHD	-	28.8	-	kHz	HD
1 horizontal field	th	856	860	920	CLK	1
HD pulse width	thp	1	2	100	CLK	1
HD back porch	thb	5	16	101	CLK	CLK,HD,ENAB
HD front porch	thf	19	44	115	CLK	R[7:0],G[7:0],B[7:0]
ENAB pulse width	tenp	800		CLK	]	
Horizontal valid data	thdp		800		CLK	

(\*) Input terminals are (R0+/-, R1+/-, R2+/-, R3+/-, CLK+/-).

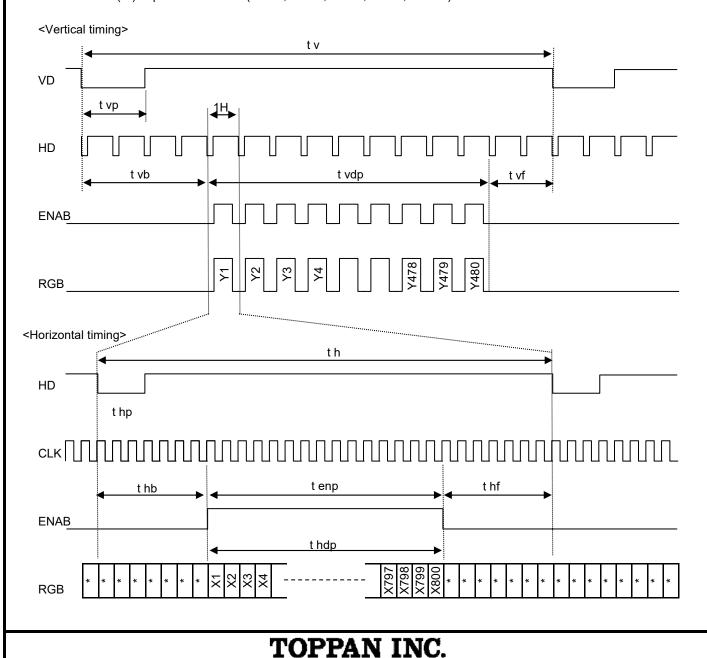


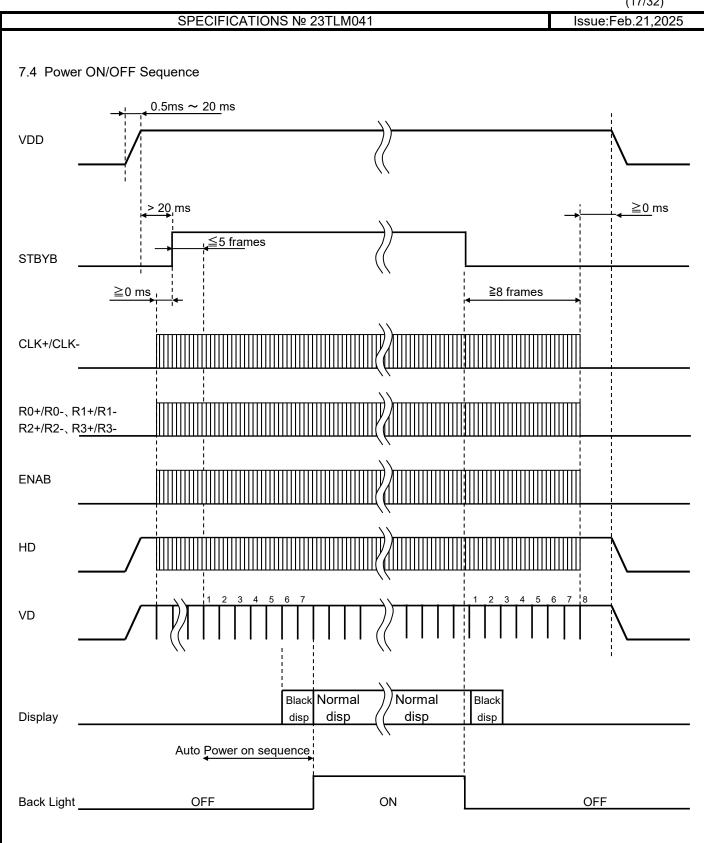


Note: ENAB, HD and VD are included in the R2 + / R2- terminals.

Issue:Feb.21,2025

#### 8. LED Circuit

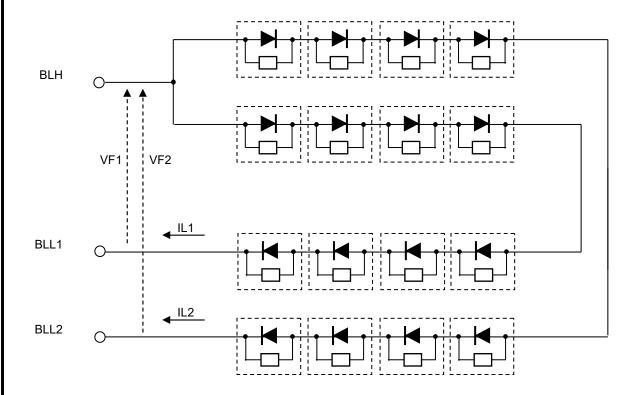



\* It is recommended to control currents of BLL1 / BLL2 to equal current values (IL1 = IL2).

#### 9. Characteristics



### 9.1 Optical Characteristics

(Measurement Condition)

Measuring instruments: CS2000 (KONICA MINOLTA), LCD7200 (OTSUKA ELECTRONICS), EZcontrastXL88 (ELDIM)


Driving condition: VDD=3.3V,GND=0V, Optimized VCOMDC

Backlight: IL1 = IL2 = 23.0 mA

Measured temperature: Ta = 25°C

	Item	Symbol	Condition	MIN	TYP	MAX	Unit	Note №	Remark
Response time	Rise time + Fall time	TON + TOFF	[Data]= 00h← → FFh	-	1	100	ms	1	
Contrast ratio	Backlight ON	CR	[Data]= FFh / 00h	600	1000	-		2	
ပိ	Backlight OFF			-	3.0	-			
D	Left	θL	[Data]=	-	88	-	deg	3	
Viewing angle	Right Up	θR	FFh / 00h	-	88	ı	deg		
/ie∕	Up	φU	CR ≧ 10	-	88	ı	deg		
	Down	φD		-	88	-	deg		
White	e Chromaticity	У	[Data]= FFh	White ch	romatici	ty range		4	
Cente	er Brightness	,	[Data]= FFh	420	600	-	cd/m²	5	
				-	1000	-			IL1=IL2=42.0mA *Reference
Brigh	tness distribution		[Data]= FFh	70	-	_	%	6	
Burn-	in			No noticeable burn-in image shall be observed after 2 hours of window pattern display.				7	

<sup>\*</sup> Note number 1 to 7: Refer to the APPENDIX of "Reference Method for Measuring Optical Characteristics and Performance".

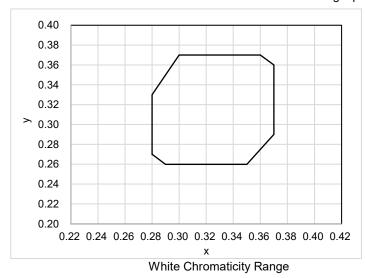

#### (White Chromaticity Range)

Х	у
0.28	0.27
0.28	0.33
0.30	0.37
0.36	0.37
0.37	0.36
0.37	0.29
0.35	0.26
0.29	0.26

#### 9.2 About Sunlight readable

Item	Illuminance	Display visibility	Remarks
Sunlight readable	100,000 lx	Possible	Refer to <features blanview="" of=""></features>

Issue:Feb.21,2025

#### 9.3 Temperature Characteristics

(Measurement Condition)

Measuring instruments: CS2000 (KONICA MINOLTA), LCD7200 (OTSUKA ELECTRONICS)

Driving condition: VDD=3.3V,GND=0V, Optimized VCOMDC

Backlight: IL1 = IL2 = 23.0 mA

Iten	Item		Specif	Remark	
			Ta = -30 °C	Ta = 85 °C	
Response time	Rise time + Fall time	TON + TOFF	600 msec or less	80 msec or less	
Contrast ratio		CR	200 or more	200 or more	
Display Quality			No noticeable display on should be observed.	lefect or ununiformity	

Issue:Feb.21,2025

#### 10. Criteria of Judgment




### 10.1 Defective Display and Screen Quality

Test Condition: Observed TFT-LCD monitor from front during operation with the following conditions

Driving Signal: Raster Pattern (RGB, white, black) Signal condition: [Data]:00h, A8h, FFh (3steps)

Observation distance: 30 cm

Illuminance: 200 to 350 lx Backlight: IL1 = IL2 = 23.0 mA




De	efect item	Defect content		Criteria
	Line	Black, white or color li	ne, 3 or more neighboring defective dots	Not exists
	defect			
Ĭ₹	Dot	Uneven brightness on	dot-by-dot base due to defective	Refer to table 1
Quality	defect	TFT or CF, or dust is	counted as dot defect	
		(brighter dot, darker d	ot)	
Display		High bright dot: Visible	e through 2% ND filter at [Data]=00h	
Οįs		Low bright dot: Visible	e through 5% ND filter at [Data]=00h	
		Dark dot: Appear dark	through white display at [Data]=A8h	
		Invisible through 5% N	ID filter at [Data]=00h	Acceptable
	Stain	Uneven brightness (w	hite stain, black stain etc)	Invisible through 1% ND filter.
Ϊŧ	Foreign	Point-like	0.25mm< φ	N=0
Quality	particle		$0.20$ mm< $\phi \leq 0.25$ mm	N≦2
ū			φ ≦0.20mm	Acceptable
Screen		Liner	3.0mm < L and 0.08mm < W	N=0
SS			$L \le 3.0$ mm or $W \le 0.08$ mm	Acceptable
	Others			Use boundary sample
			for judgment when necessary	

<sup>\*</sup> φ (mm): Average diameter = (major axis + minor axis ) / 2, W (mm): Width, L (mm): Length, N: Permissible number

#### Table1

Area	High bright dot	Low bright dot	Dark dot	Total	Criteria
Α	0	2	2	3	Permissible distance between same color bright dots (includes neighboring dots): 3 mm or more
В	2	4	4	6	Permissible distance between same color high bright dots (includes neighboring dots): 5 mm or more
Total	2	4	4	7	

#### <Landscape model>



Division of A and B areas

B area: Active area

Dimensional ratio between A and B areas: 1: 4: 1

(Refer to the left figure)

Issue:Feb.21,2025


#### 10.2 Screen and Other Appearance

Testing conditions

Observation distance: 30 cm

Illuminance: 1200  $\sim$  2000 lx

	Item	Criteria	Remark
	Flaw	Ignore invisible defect when the backlight is on.	Applicable area: Active area only
۳	Stain		(Refer to the section 3.2 Outward Form)
rize	Dirt		
ola	Dirt Bubble		
□	Dust		
	Dent		
S	case	No functional defect occurs	
FF	⊃C	No functional defect occurs	




#### 11. Reliability Test

Test item		Test condition		number of failures /
				number of examinations
	High temperature storage	Ta = 95°C 500hrs		0/3
	Low temperature storage	Ta = -40°C 500hrs		0/3
	High temperature &	Ta = 60°C, RH = 90%, 500hrs		0/3
st	high humidity storage	non condensing	*	
Durability test	High temperature operation	Tp = 85°C 500hrs		0/3
	Low temperature operation	Tp = $-30$ °C 500hrs		0/3
	High temperature &	Tp = 40°C, RH = 90%, 500hrs		0/3
Ď	high humidity operation	non condensing	*	
	Thermal shock storage	-40°C ↔ 95°C (30min / 30min) 100cycles		0/3
	Lightfastness	Xenon Blackpanel 63±3°C non-shower		0/3
		450W/m²(300~700nm) non-operating Integral dose 800MJ/m²		
	Electrostatic discharge test	Confirms to EIAJ ED-4701/300, C=200pF,R=0Ω,V=±2	Confirms to EIAJ ED-4701/300, C=200pF,R=0Ω,V=±200V	
	(Non operation)	Each 3 times of discharge on and power supply		
		and other terminals.		
	Surface discharge test	C=250pF, R=100Ω, V=±12kV		0/3
ید	(Non operation)	Each 5 times of discharge in both polarities		
tes		on the center of screen with the case grounded.		
Mechanical environmental test	FPC tension test	Pull the FPC with the force of 3N for 10 sec.		0/3
ner	(FPC of LCD only)	in the direction - 90-degree to its original direction.		
onr	FPC bend test	Pull the FPC with the force of 3N for 10 sec.		0/3
ıvir	(FPC of LCD only)	in the direction -180-degree to its original direction.		
l e		Reciprocate it 3 times.		
ica	Vibration test	Use TOPPAN original jig (see next page)		0/3
har	(Non operation)	Vibration Acceleration : 66.64 m/s² (6.8 G)		
1ec		Frequency: 20 ~ 500 Hz , Cycle: 10 min/sweep		
2		Orientation: X,Y,Z-directions 10 hrs per direction (Tot	al 30 hrs)	
	Impact test	Use TOPPAN original jig (see next page) and		0/3
	(Non operation)	make an impact with peak acceleration of 1000m/s <sup>2</sup> for 6 msec		
		with half sine-curve at 3 times to each X, Y, Z direction		
		in conformance with JIS C 60068-2-27-2011.		
3	Packing vibration-proof test	Acceleration of 19.6m/s <sup>2</sup> with frequency of 10→55→10Hz,		0 / 1 packing
king st		X,Y, Zdirection for each 30 minutes.		-
Packing test	Packing drop test	Drop from 75cm high.		0 / 1 packing
щ		1 time to each 6 surfaces, 3 edges, 1 corner		

Note:Ta=ambient temperature

Tp=Panel temperature

% The profile of high temperature/humidity storage and High Temperature/humidity operation (Pure water of over 10M $\Omega$ ·cm shall be used.)

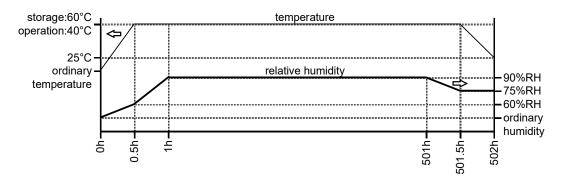


Issue:Feb.21,2025

#### Table2. Reliability Criteria


The parameters should be measured after leaving the monitor at the ordinary temperature for 24 hours or more after the test completion.


Item	Standard	Remark
Display quality	No visible abnormality shall be seen.	
	(Except for unevenness by Pol deterioration.)	
Contrast ratio	200 or more	Backlight ON

#### **TOPPAN Original Jig**

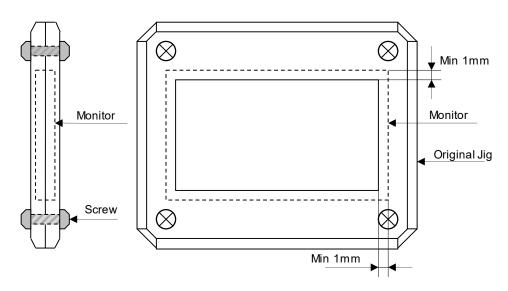


#### FPC tension test





#### 12. Packing Specifications



Step1: Each product is to be placed on the try with it's the displaysurface facing upward. (2 products per the first step)

Foam sheets is to be placed on the products in the tray.

Each product is to be placed on the tray with it's the displaysurface facing upward. (2 products per the first step)

Step2: Each tray needs to be stacked with 180 degrees alternate to the tray under or over it and the trays be in a stack of 5. one empty tray is to be put on the top of stack of 5 packed trays.

Step3: Moisture absorbers are to be placed at the designated places one the top tray as shown in the drawing. A piles of trays is to be put into a sealing bag.


Step4: The sealing bag is to be sealed by vacuum sealing machine.

Step5: Cover the perimeter with a B SHEET A and tape it in place.

Step6: The wrapped trays are placed in the carton.


Step7: B SHEET B is to be inserted into a outer carton with same orientation. The outer carton is to be sealed in H-shape with packing tape as shown in the drawing.


Step8: The model number, quantity of products, and shipping date are to be printed on the 2 opposite sides of the other carton with black ink.





an empty tray

A stack of 5 packed tray









Remark: The return of packing materials not required.

Packing item name		Specs. Materials	
1	Foam sheet	Antistatic Polyethylene	
2	Tray	A-PET	
3	Drier	Moisture absorber	
4	Sealing bag		
<b>⑤</b>	B SHEET A	Antistatic air bubble sheet	
6	B SHEET B	Antistatic air bubble sheet	
7	Outer Carton	Corrugated cardboard	
8	Packing tape		

Dimension of extra outer carton		
D : Approx.	( 356 mm )	
W : Approx.	( 664 mm )	
H : Approx	( 182 mm )	
Quantity of products	20	
packed in one carton:		
Gross weight : Approx.	5.6 kg	

#### 13. Handling Instruction

#### 13.1 Cautions for Handling LCD panels

#### Ŵ

#### Caution

- (1) Do not make an impact on the LCD panel glass because it may break and you may get injured from it.
- (2) If the glass breaks, do not touch it with bare hands.(Fragment of broken glass may stick you or you cut yourself on it.
- (3) If you get injured, receive adequate first aid and consult a medial doctor.
- (4) Do not let liquid crystal get into your mouth.
  (If the LCD panel glass breaks, try not let liquid crystal get into your mouth even toxic property of liquid crystal has not been confirmed.)
- (5) If liquid crystal adheres, rinse it out thoroughly.
  (If liquid crystal adheres to your cloth or skin, wipe it off with rubbing alcohol or wash it thoroughly with soap.
  If liquid crystal gets into eyes, rinse it with clean water for at least 15 minutes and consult an eye doctor.
- (6) If you scrap this products, follow a disposal standard of industrial waste that is legally valid in the community, country or territory where you reside.
- (7) Do not connect or disconnect this product while its application products is powered on.
- (8) Do not attempt to disassemble or modify this product as it is precision component.
- (9) If a part of soldering part has been exposed, and avoid contact (short-circuit) with a metallic part of the case etc. about FPC of this model, please. Please insulate it with the insulating tape etc. if necessary. The defective operation is caused, and there is a possibility to generation of heat and the ignition.
- (10) Since excess current protection circuit is not built in this TFT module, there is the possibility that LCD module or peripheral circuit become feverish and burned in case abnormal operation is generated. We recommend you to add excess current protection circuit to power supply.
- (11) The devices on the FPC are damageable to electrostatic discharge, because the terminals of the devices are exposed.
  Wear grounded wrist-straps and use electrostatic neutralization blowers to prevent static charge and discharge when handling the TFT monitors.
  Designate an appropriate operating area, and set equipment, tools, and machines properly when handling this product.

#### Caution




This mark is used to indicate a precaution or an instruction which, if not correctly observed, may result in bodily injury, or material damages alone.

Issue:Feb.21,2025

#### 13.2 Precautions for Handling

- Wear finger tips at incoming inspection and for handling the TFT monitors to keep display quality and keep the working area clean.
  - Do not touch the surface of the monitor as it is easily scratched.
- Wear grounded wrist-straps and use electrostatic neutralization blowers to prevent static charge and discharge when handling the TFT monitors as the LED in this TFT monitors is damageable to electrostatic discharge.
  Designate an appropriate operating area, and set equipment, tools, and machines properly when handling this product.
- 3) Avoid strong mechanical shock including knocking, hitting or dropping to the TFT monitors for protecting their glass parts. Do not use the TFT monitors that have been experienced dropping or strong mechanical shock.
- 4) Do not use or storage the TFT monitors at high temperature and high humidity environment.

  Particularly, never use or storage the TFT monitors at a location where condensation builds up.
- 5) Avoid using and storing TFT monitors at a location where they are exposed to direct sunlight or ultraviolet rays to prevent the LCD panels from deterioration by ultraviolet rays.
- Do not stain or damage the contacts of the FPC cable .
   FPC cable needs to be inserted until it can reach to the end of connector slot.
   During insertion, make sure to keep the cable in a horizontal position to avoid an oblique insertion.
   Otherwise, it may cause poor contact or deteriorate reliability of the FPC cable.
- 7) Do not bend or pull the FPC cable or carry the TFT monitor by holding the FPC cable. Especially, it will cause mechanical damage or critical defect if FPC is pull up or bent up to short of display.



Peel off the protective film on the TFT monitors during mounting process.
Refer to the section 13.5 on how to peel off the protective film.

We are not responsible for electrostatic discharge failures or other defects occur when peeling off the protective film.

#### 13.3 Precautions for Operation

- Since this TFT monitors are not equipped with light shielding for the driver IC,
   do not expose the driver IC to strong lights during operation as it may cause functional failures.
- 2) In case of powering up or powering off this LCD module, be sure to comply the sequence as instructed in this specification.
- 3) Do not plug in or out the FPC cable while power supply is switch on. Plug the FPC cable in and out while power supply is switched off.
- 4) Do not operate the TFT monitors in the strong magnetic field. It may break the TFT monitors.
- 5) Do not display a fixed image on the screen for a long time. Use a screen-saver or other measures to avoid a fixed image displayed on the screen for a long time. Otherwise, it may cause burn-in image on the screen due the characteristics of liquid crystal.

Issue:Feb.21,2025

#### 13.4 Storage Condition for Shipping Cartons

(Storage environment)

Temperature 0 to 40° CHumidity 60%RH or less

No-condensing occurs under low temperature with high humidity condition.

Atmosphere No poisonous gas that can erode electronic components and/or

wiring materials should be detected.

Time period 1 year

Unpacking
 To prevent damages caused by static electricity, anti-static precautionary measures

(e.g. earthing, anti-static mat) should be implemented.

After unpack, keep product in the appropriate condition,

otherwise bubble seal of Protective film may be printed on Polarizer.

Maximum piling up 8 cartons (excluding the bottom)

#### \*Conditions to storage after unpacking

(Storage environment)

Temperature 0 to 40° CHumidity 60%RH or less

No-condensing occurs under low temperature with high humidity condition.

Atmosphere No poisonous gas that can erode electronic components and/or

wiring materials should be detected.

Time period
 1 year (Shelf life)

Others Keep/ store away from direct sunlight

Storage goods on original tray made by TOPPAN.

#### 13.5 Precautions for Peeling off the Protective film

The followings work environment and work method are recommended to prevent the TFT monitors from static damage or adhesion of dust when peeling off the protective films.


#### A) Work Environment

- a) Humidity: 50 to 70 %RH, Temperature15 to 27°C
- b) Operators should wear conductive shoes, conductive clothes, conductive finger tips and grounded wrist-straps. Use an electrostatic neutralization blower.
- c) Anti-static treatment should be implemented to work area's floor.
   Use a room shielded against outside dust with sticky floor mat laid at the entrance to eliminate dirt.

#### B) Work Method

The following procedures should taken to prevent the driver ICs from charging and discharging.

- a) Use an electrostatic neutralization blower to blow air on the TFT monitors to its lower right when FPC is placed at the bottom.
   Optimize direction of the blowing air and the distance between the TFT monitors and the electrostatic neutralization blower.
- b) Put an adhesive tape (Scotch tape, etc) at the lower right corner area of the protective film to prevent scratch on surface of TFT monitors.
- c) Peel off the adhesive tape slowly (spending more than 2 secs to complete) by pulling it to opposite direction.

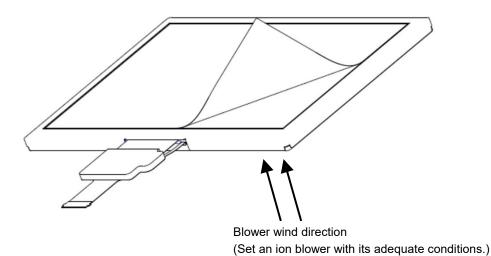

#### 13.6 Warranty

TOPPAN is only liable to defective goods which is stored and used under the condition complying with this specifications and returned within 1 (one) year.

Warranty caused by manufacturing defect shall be conducted by replacement of goods or refundment at unit price.

#### **APPENDIX**

Reference Method for Measuring Optical Characteristics and Performance

#### 1. Measurement Condition

Measuring instruments: CS2000 (KONICA MINOLTA), LCD7200(OTSUKA ELECTRONICS), EZcontrastXL88 (ELDIM)


Driving condition: Refer to the section "Optical Characteristics"

Measured temperature: 25°C unless specified

Measurement system: See the chart below. The luminance meter is placed on the normal line of measurement system.

Measurement point: At the center of the screen unless otherwise specified

Dark box at constant temperature

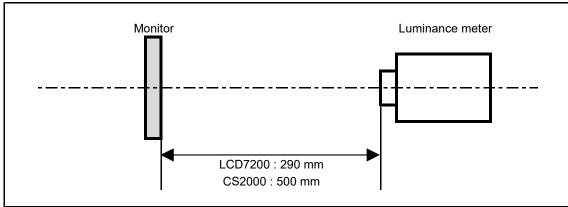


<sup>\*</sup>Measurement is made after 30 minutes of lighting of the backlight.

Measurement point: At the center point of the screen

Brightness distribution: 9 points shown in the following drawing.

#### <Landscape model>



Dimensional ratio of active area

Backlight IL1 = IL2 = 23.0 mA


Measurement Condition (Contrast ratio Backlight OFF only)


Measuring instruments: LCD7200(OTSUKA ELECTRONICS), Ring Light (40,000 lx,  $\phi$ 58)

Driving condition: Refer to the section "Optical Characteristics"

Measured temperature: 25°C unless specified Measurement system: See the chart below.

Measurement point: At the center of the screen unless otherwise specified

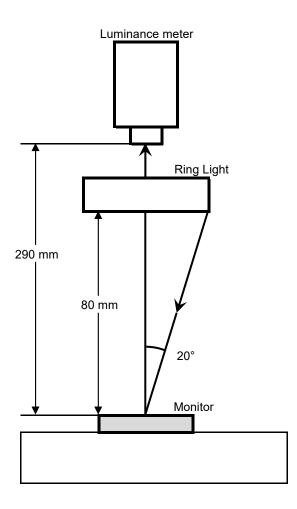



	Issue:Feb.21,202			
2. Test	Method			
Notice	Item	Test method	Measuring instrument	Remark
1	Response time	Measure output signal waveform by the luminance meter when raster of window pattern is changed from white to black and from black to white.  Black  100%  90%  TON  TOFF	LCD7200	Black display [Data]=00h White display [Data]=FFh TON Rise time TOFF Fall time
2	Contrast ratio	Measure maximum luminance Y1([Data]=FFh) and minimum luminance Y2([Data]=00h) at the center of the screen by displaying raster or window pattern. Then calculate the ratio between these two values.  Contrast ratio = Y1/Y2  Diameter of measuring point: 7.8mmφ(CS2000)  Diameter of measuring point: 3 mmφ(LCD7200)	CS2000 LCD7200	Backlight ON Backlight OFF
3	Viewing angle Horizontalθ Verticalφ	Move the luminance meter from right to left and up and down and determine the angles where contrast ratio is 10.	EZcontrastXL88	
4	White chromaticity	Measure chromaticity coordinates x and y of CIE1931 colorimetric system at [Data] = FFh Color matching function: 2°view measurement angle: 1°	CS2000	
5	Center brightness	Measure the brightness at the center of the screen.	CS2000	
6	Brightness distribution	(Brightness distribution) = 100 x B/A % A: max. brightness of the 9 points B: min. brightness of the 9 points	CS2000	
7	Burn-in	Visually check burn-in image on the screen after 2 hours of "window display" ([Data]=00h/FFh).		At optimized VCOMDC

### **DATA MODUL**

### **Passion Displayed**







### All good things come in threes:

With **Hardware**, **Software** and **Services**, we realise unique display solutions that turn your ideas into reality.

www.data-modul.com

