

TO : Customer

DATE : 2025.06.11

GREEN C&C TECH Co.,Ltd
75, Saneop-ro 92beon-gil,
Gwonseon-gu, Suwon-si, Gyeonggi-do
KOREA 16643
TEL : 82-31-373-3623~3625
FAX : 82-31-373-3610

DOCUMENTATION FOR APPROVAL

PRODUCT : LED BACKLIGHT DRIVER (RoHS)
MODEL NAME : GH765A(A7)
GCCT NAME : GCCT765AG

APPROVAL	CHECKED	WRITTEN

PLEASE RETURN ONE DOCUMENT AFTER APPROVED SIGN.

--

GREEN C&C TECH	LED DRIVER SPECIFICATION GH765A(A7)	Publishing Date Reforming Date	2025.06.11
----------------	--	-----------------------------------	------------

1. APPLICATION

This Document Specified The Detailed Product Requirement of LED driver
GH765A(A7)

2. SUITABLE LOAD

LCD MODULE : 4 Strings LED BLU TFT LCD

3. ELECTRICAL CHARATERISTICS

3.1. Absolute Maximum Ratings

Item	Symbol	Spec.	Unit	Remarks
Input Voltage 1	Vin	10.8~26.4	V	
Input Voltage 2	ON/OFF	5.25	V	
Operating Temperature	Top	-20~70	℃	
Storage Temperature	Tstg	-30~80	℃	
Relative Humidity	RH	80	%	

3.2. Control Signal

PIN No.	Symbol	Status	Action	Remarks
CN1 #9	ON/OFF	HIGH	LED - ON	2.4 ~ 5.0V
		LOW	LED - OFF	0.8 V Max

GREEN C&C TECH	LED DRIVER SPECIFICATION GH765A(A7)	Publishing Date Reforming Date	2025.06.11
----------------	--	-----------------------------------	------------


3.3. Output Characteristics

Item	Sym.	Condition	Min.	Typ.	Max.	Unit
Input Voltage	Vin	-	10.8	-	26.4	Vdc
Input Current	Iin	Vin=12V, Dim=0V	-	-	1.2	A
Output Current	Iout (Max)	Vin=12V, Dim=0V	48.0	55.0	62.0	mAmean
	Iout (Min)	Vin=12V, Dim=5V	15.0	20.0	25.0	
Backlight ON/OFF Control	ON	-	2.4	-	5.0	Vdc
	OFF	-	-0.3	-	0.8	

* Output Voltage is greater than Input Voltage for at least 3V or more.

3.4. Test Circuit

-. S/W : A --> BLU ON
 B --> BLU OFF

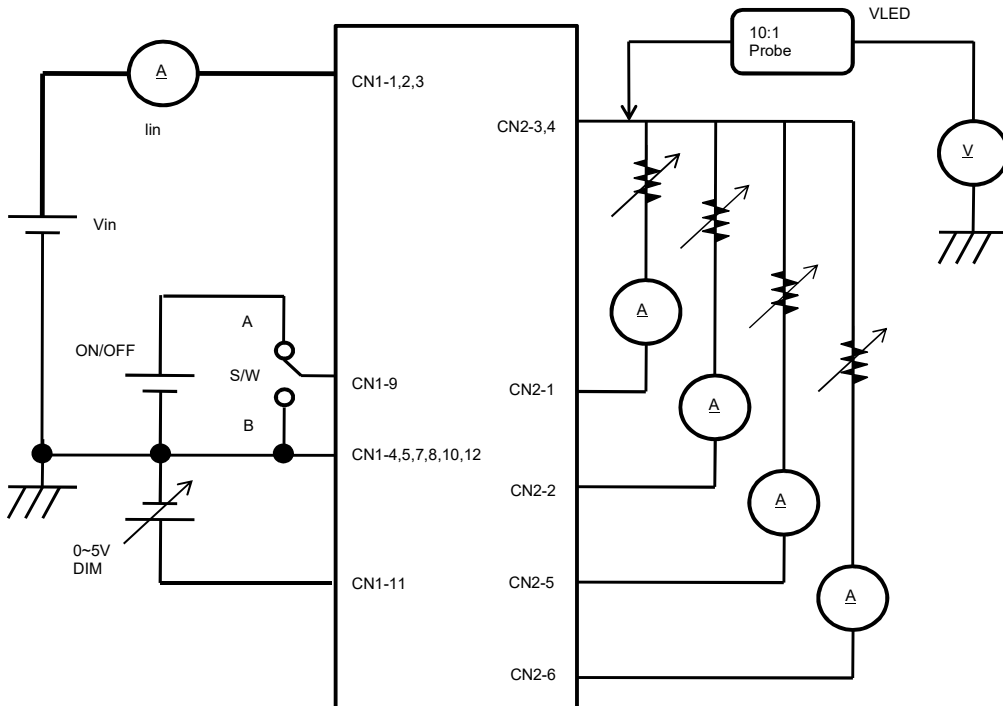

GREEN C&C TECH	LED DRIVER SPECIFICATION GH765A(A7)	Publishing Date Reforming Date	2025.06.11
----------------	--	-----------------------------------	------------

4. INTERFACE

4.1. CN1 Connector (Input) : 12505WR-12A (YEONHO) or Equivalent

PIN No.	Symbol	Description
1,2,3	VIN	Voltage Input : 12V, 24V (typ.)
4,5,7,8,10,12	GND	Ground
6	N.C	No Connection
9	ON/OFF	LED DRIVER ON/OFF Control
11	DIM	0V(MAX)~5V(MIN)


4.2. CN2 Connector (Output) : 12507WR-06L (YEONHO) or Equivalent

PIN No.	Symbol	Description
1	FB1	Feedback 1 (Return 1)
2	FB2	Feedback 2 (Return 2)
3	VLED	System Output
4	VLED	System Output
5	FB3	Feedback 3 (Return 3)
6	FB4	Feedback 4 (Return 4)

GREEN C&C TECH	LED DRIVER SPECIFICATION GH765A(A7)	Publishing Date Reforming Date	2025.06.11
----------------	--	-----------------------------------	------------

5. APPERANCE (Unit : mm)

(Tolerance : +0.8mm, -0.2mm)

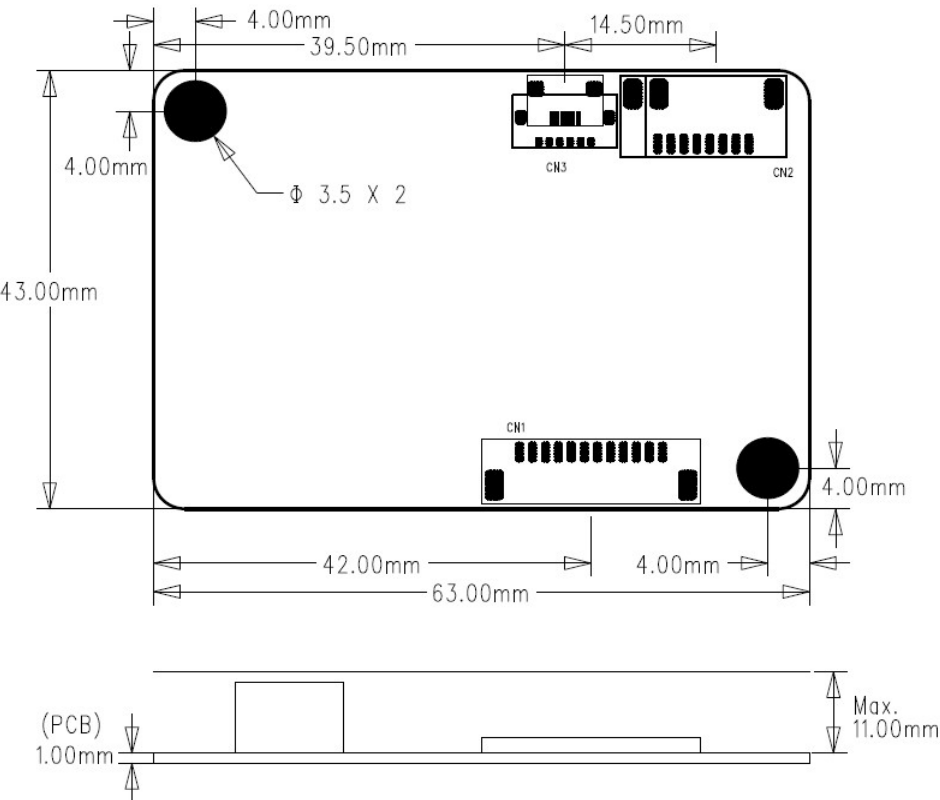

6. NOTATION OF LOT NUMBER

MARKING:BOTTOM



GH765A(A7)

G20 01A

0001 AG

→ ① USER MODEL CODE

→ ② PRODUCTION MANAGEMENT CODE

→ ③ SERIAL NUMBER OR CONTROL CODE

①	GH765A(A7)	: USER MODEL CODE
	G	: MANUFACTURER CODE (GREEN C&C TECH)
	20	: YEAR OF PRODUCT
②	01	: WEEK OF PRODUCT 01,02,03,04,...52
	A	: PUBLICATION NUMBER A,B,C,...,Z,0,1,2,...,9
③	0001	: SERIAL NUMBER 0001,0002.....9998,9999
	AG	: GCCT CONTROL MODEL CODE


GREEN C&C TECH	LED DRIVER SPECIFICATION GH765A(A7)	Publishing Date	2025.06.11
		Reforming Date	

7. PART LIST


SYMBOL	NAME	1st		2nd	
		TYPE No	MAKER	TYPE No	MAKER
U1	IC	MP3391EF	MPS		
Q1	FET	AP9997GH	APEC	Equivalent	
Q2	TR	MMBT2907A	DIODES	Equivalent	
D1	DIODE	B2100	DIODES/LITEON	Equivalent	
C1	C-ELEC	BXJ Series 220uF/35V	SAMYOUNG	Equivalent	
C16		BXJ Series 10uF/100V	SAMYOUNG	"	
C2,C4	MLCC	CL21A225KA	SEMCO	Equivalent	
C3		CL21B105KB	"	"	
C5,C6,C8		CL10A105KA	"	"	
C7		CL10B102KB	"	"	
C9		CL10B104KB	"	"	
C14		CL10C101JB	"	"	
C15		CL31B105KC	"	"	
R1	CHIP-R	RM10JTN100	TA-I Tech	Equivalent	
R3,R12		RM06JTN224	"	"	
R4,R5		RM06JTN513	"	"	
R6,R9,R19, R25,R26		RM06JTN104	"	"	
R7		RM06JTN124	"	"	
R10		RM06JTN273	"	"	
R11		RM06JTN102	"	"	
R13		RM06JTN184	"	"	
R14,R15		RM06JTN393	"	"	
R17		RM06JTN101	"	"	
R18		RM06JTN100	"	"	
R20,R21		RL12FTNR200	"	"	
R27		RM06JTN362	"	"	
F1	FUSE	CCF1N4	KOA	451004	LITTELFUSE
		CB61F4A	COOPER BUSSNANN	453004	
L1	Inductor	SPI-1260SDN-470	SEJIN	Equivalent	
L2		PNL4020-100M	DONGAN ELEC	"	
CN1	Connector	12505WR-12(P)	YEONHO	Equivalent	
CN2		12507WR-06L(P)	YEONHO	"	
PCB	PCB	GH765A REV0.0	SEOKANG	GH765A REV0.0	CSP
		GH765A REV0.0	DAUN ENG	GH765A REV0.0	SKY TECHNOLOGY

GREEN C&C TECH	LED DRIVER SPECIFICATION GH765A(A7)	Publishing Date Reforming Date	2025.06.11
----------------	--	-----------------------------------	------------

8. PCB LAYOUT

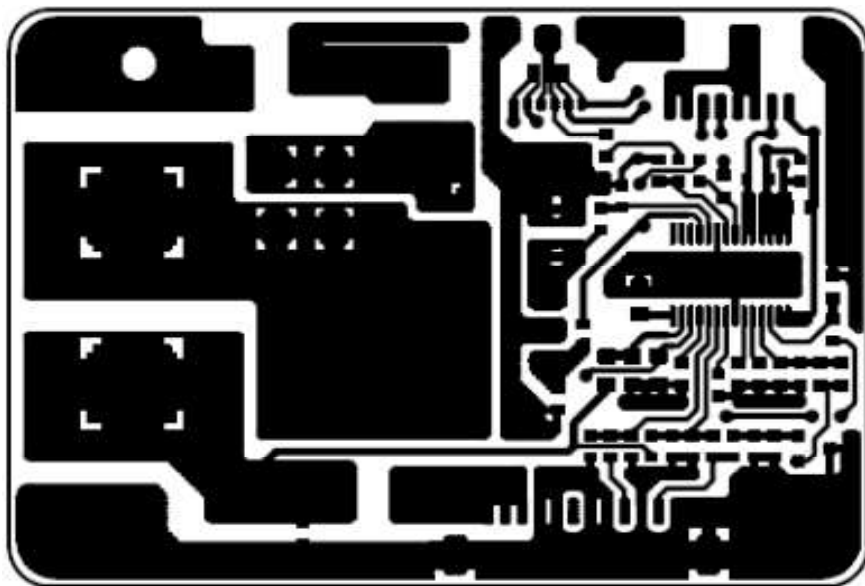

TOP LAYER

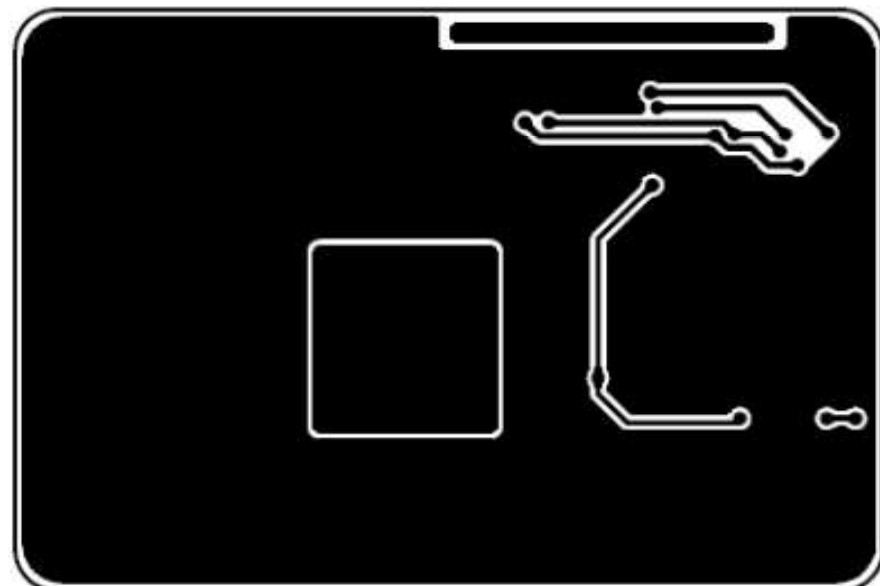


BOTTOM LAYER

GREEN C&C TECH


LED DRIVER SPECIFICATION
GH765A(A7)

Publishing Date
Reforming Date

2025.06.11

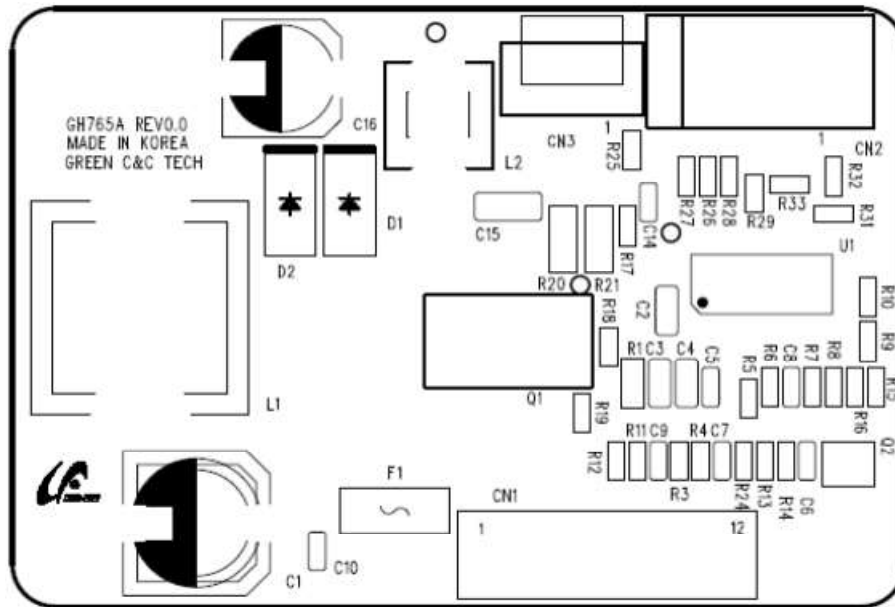


SILK SCREEN TOP

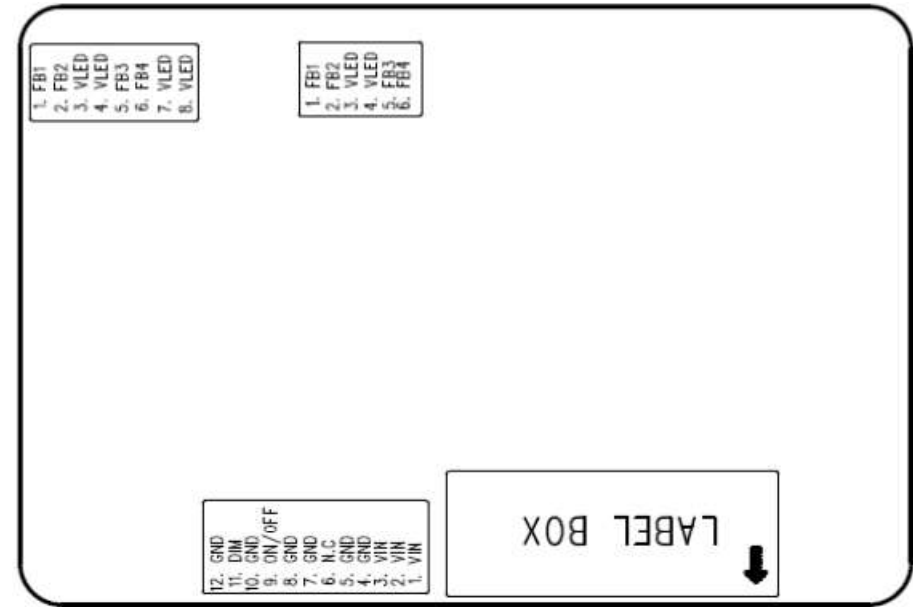

SILK SCREEN BOTTOM

9. CIRCUIT

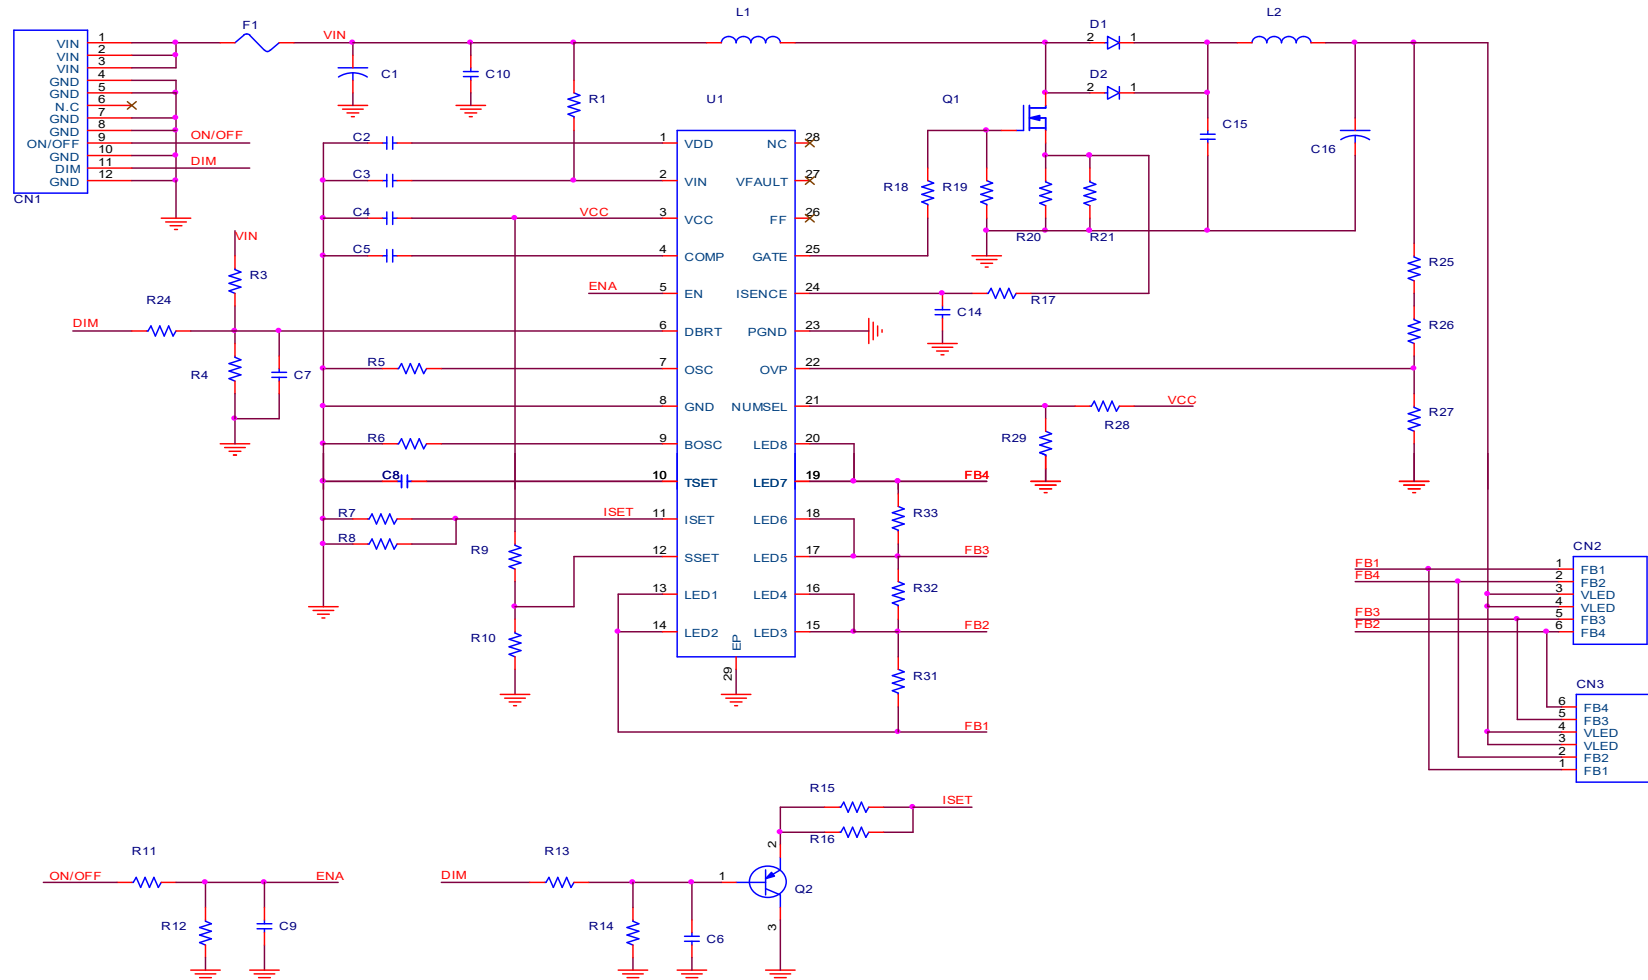

GREEN C&C TECH	LED DRIVER SPECIFICATION GH765A(A7)	Publishing Date Reforming Date	2025.06.11
----------------	--	-----------------------------------	------------

10. RELIABILITY TEST SPEC.

NO.	ITEM	Conditions and Method
1	High Temperature Storage Test	Temp : 80 ℃ Duration : 250hrs
2	Low Temperature Storage Test	Temp : -30 ℃ Duration : 250hrs
3	High Temperature High Humidity Operation Test	Temp : 70 ℃ Humidity : 95%RH Duration : 250hrs
4	Signal On/Off Test	Temp : Normal Temperature On-Off Signal On 10sec / Off 10sec Power on full Load 30,000 cycles
5	Thermal Shock Test	Temp : -30 ℃ ↔ 80 ℃, 100 cycles (30min) (30min)
6	High Temperature Operation Test	Temp : 70 ℃ Duration : 250hrs
7	Low Temperature Operation Test	Temp : -20 ℃ Duration : 250hrs

GREEN C&C TECH	LED DRIVER SPECIFICATION GH765A(A7)	Publishing Date Reforming Date	2025.06.11
----------------	--	-----------------------------------	------------


11. FLOW CHART


MODEL (TYPE)	GH765A(A7)	REVISION	5
WRITER	S.C.HWANG	FLOW CHART	
FLOW CHART	PROCESS	EQUIPMENTS	Remark
	Raw Material		PART LIST
	Solder Printing	Cream-solder Printer	
	Surface Mounting	Low-high Mounter	
	Reflow Soldering (CTQ)	Reflower	
	Visual Inspection (AOI)	Microscope, Vision-Master	
	Label attachment	Marking	
	Preparing Process		
	Soldering by Hand for Discrete Parts		
	Spreading Silicon	Silicon Dispenser	
	Insert Lead Parts		
	Wave-Soldering	Wave-Soldering Machine	
	Visual Inspection		
	PCB Division		
	Aging	Power Supply, Aging Box	2hrs
	Electrical Characteristics inspection	Testing System, Testing JIG	
	Insulator Attachment		
	Bar-Code Reading	Bar-Code Reader	
	Package		
	Outgoing Inspection	Testing System, Testing JIG	List of Inspection
	Shipping		
Based on Standard Rule	GCCT765AG		

GREEN C&C TECH	LED DRIVER SPECIFICATION GH765A(A7)	Publishing Date Reforming Date	2025.06.11
----------------	--	-----------------------------------	------------


12. PACKING

12.1. BOX

				 L/C NO : C/T NO : MADE IN KOREA
1. Customer				
2. PART NAME	GH765A(A7)			
3. PO NO				
4. Q'ty	000 EA			
5. Date	00.00.00			
6. LOT NO				



12.2. TRAY

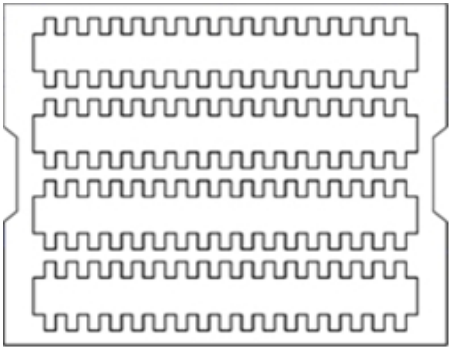

SYMBOL	TYPE NO
PACKING-TRAY	393*324*53
PACKING-BOX	415*340*332
PACKING-PAD	400*325*5

1 TRAY : 68EA (GR2052)
1BOX : 6 TRAY (408EA) - A TYPE

GREEN C&C TECH	LED DRIVER SPECIFICATION GH765A(A7)	Publishing Date Reforming Date	2025.06.11
----------------	--	-----------------------------------	------------

13. Material list for safety GH765A(A7)

SYMBOL	NAME	TYPE No	MANUFACTURER	DESCRIPTION
F1	FUSE	CCF1N4	KOA	UL FILE NO. : E171861
		451004	LITTELFUSE	UL FILE NO. : E10480
		453004		CSA FILE NO : LR29862
		CB61F4A	COOPER BUSSNANN	UL FILE NO. : E19180
PCB	Printed Writing Board	FR4	SEOKANG	UL FILE NO. : E150774
			DAUN ENG	UL FILE NO. : E529627
			CSP	UL FILE NO. : E470424
			SKY TECHNOLOGY	UL FILE NO. : E513927
CN1	Connector	12505WR-12A	YEONHO	UL FILE NO. : E108706
CN2	Connector	12507WR-06L	YEONHO	UL FILE NO. : E108706