



SPECIFICATION



PH128800T007-ZHC02

10.1" – WXGA – MIPI

Version: 00.2

Date: 19.01.2024

Note: This specification is subject to change without prior notice

Contents

1. SPECIFICATIONS

- 1.1 Features
- 1.2 Mechanical Specifications
- 1.3 Absolute Maximum Ratings
- 1.4 DC Electrical Characteristics
- 1.5 Optical Characteristics
- 1.6 Backlight Characteristics
- 1.7 Touch Panel Characteristic

2. MODULE STRUCTURE

- 2.1 Counter Drawing
- 2.2 Interface Pin Description
- 2.3 Timing Characteristics

3. QUALITY ASSURANCE SYSTEM

- 3.1 Quality Assurance Flow Chart
- 3.2 Inspection Specification

4. RELIABILITY TEST

- 4.1 Reliability Test Condition

5. PRECAUTION RELATING PRODUCT HANDLING

- 5.1 Safety
- 5.2 Handling
- 5.3 Storage
- 5.4 Terms of Warranty

Appendix:

- 1.LCM Drawing
- 2.Packaging Specifications

1. SPECIFICATIONS

1.1 Features

<u>Item</u>	<u>Standard Value</u>
Display Resolution	1280 *3 (RGB) * 800 Dots
LCD Type	Full Viewing Angle , Normally Black, Transmissive type
Screen size(inch)	10.1 inch
Color configuration	R.G.B. Vertical Stripe
Weight	414g
Interface	MIPI
ROHS	THIS PRODUCT CONFORMS THE ROHS OF PTC Detail information please refer website: http://www.powertip.com.tw/news_detail.php?Key=1&cID=1

1.2 Mechanical Specifications

<u>Item</u>	<u>Standard Value</u>	<u>Unit</u>
Outline Dimension	254.96 (W) * 173.6 (L) * 10.8 max. (H)	mm

LCD panel

<u>Item</u>	<u>Standard Value</u>	<u>Unit</u>
View Area	217.96 (W) * 136.6 (L)	mm
Active Area	216.96 (W) * 135.6 (L)	mm

Note: For detailed information please refer to LCM drawing.

1.3 Absolute Maximum Ratings

Module

Item	Symbol	Condition	Min.	Max.	Unit	Remark
Logic Supply Voltage	V _{DD}	GND=0V	-0.3	+4.0	V	
Logic Input Signal Voltage	V _{signal}	GND=0V	-0.3	+4.0	V	
Power Supply for Backlight Unit	LED_V _{CC}	LED_GND=0V	-0.3	+26.5	V	-
Operating Temperature	T _{OP} (T _s)	Note 1	-30	+80	°C	
Storage Temperature	T _{ST} (T _a)	Note 2	-40	+85	°C	

The absolute maximum rating values of this product are not allowed to be exceeded at any time. Should a module be used with any of the absolute maximum ratings exceeded, the characteristics of the module may not be recovered, or in an extreme case, the module may be permanently destroyed.

Note 1: T_s is the temperature of panel's surface

Note 2: T_a is the ambient temperature of samples

1.4 DC Electrical Characteristics

GND = 0V, T_a = 25°C

Item	Symbol	Condition	Min.	Typ.	Max.	Unit
Logic Supply Voltage	V _{DD}	GND=0V	3.0	3.3	3.6	V
Logic Current	I _{DD}	V _{DD} = 3.3V	-	-	0.48	A
Logic Power Consumption	PV _{DD}		-	-	1.5	W
Power Supply for Backlight Unit	LED_V _{CC}	LED_GND=0V	9	12	18	V
Backlight Unit Power Consumption	PLED	LED_V _{CC} = 12V	-	-	8.5	W
PWM Signal Voltage	V _{IH}	GND=0V	1.6	-	-	V
LED Enable Voltage	V _{IL}		-	-	0.8	
Input PWM Frequency	F _{PWM}		100	-	8k	Hz
PWM Duty Ratio	PWM	1	-	100	%	

1.5 Optical Characteristics

VDD=3.3V, Ta=25°C

Item	Symbol		Condition	Min.	Typ.	Max.	unit	
Response time	Tr		Ta = 25°C θX, θY = 0°	-	10	20	ms	Note 2
	Tf			-	15	30		
Viewing angle	Top	θY+	CR ≥ 10	-	80	-	Deg.	Note 4
	Bottom	θY-		-	80	-		
	Left	θX-		-	80	-		
	Right	θX+		-	80	-		
Contrast ratio		CR		800	1000	-		Note 3
Color of CIE Coordinate	White	X	Ta = 25°C θX, θY = 0°	0.28	0.33	0.38	-	Note1
		Y		0.32	0.37	0.42		
	Red	X		0.54	0.59	0.64		
		Y		0.30	0.35	0.40		
	Green	X		0.30	0.35	0.40		
		Y		0.54	0.59	0.64		
	Blue	X		0.08	0.13	0.18		
		Y		0.06	0.11	0.16		
Average Brightness Pattern=white display (With LCD&TP)*2	IV		LED_Vcc =12.0V PWM="High" (Duty=100%)	700	850	-	cd/m ²	Note1
Uniformity (With LCD&TP)*1	ΔB		LED_Vcc =12.0V PWM="High" (Duty=100%)	70	-	-	%	Note1

Note 1:

*1: $\Delta B = B(\min) / B(\max) * 100\%$


*2: Measurement Condition for Optical Characteristics:

a: Environment: $25^{\circ}\text{C} \pm 5^{\circ}\text{C}$ / $60 \pm 20\%$ R.H, no wind, dark room below 10 Lux at typical lamp current and typical operating frequency

b: Measurement Distance: 500 ± 50 mm, ($\theta = 0^{\circ}$)

c: Equipment: TOPCON BM-7 fast, (field 1°), after 10 minutes operation

d: The uncertainty of the C.I.E coordinate measurement ± 0.01 , Average Brightness $\pm 4\%$

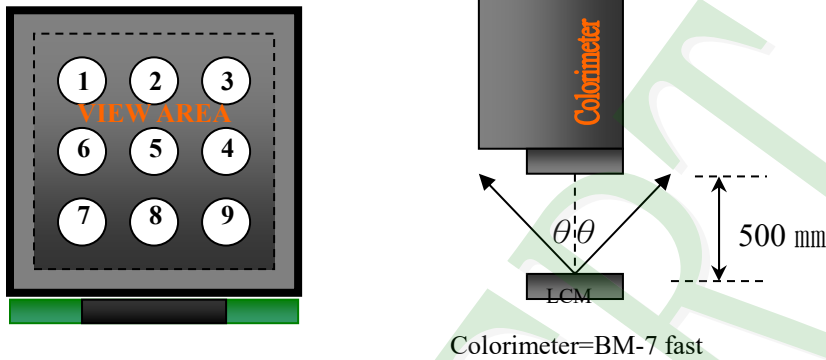

To be measured at the center area of panel with a viewing cone of 1° by Topcon luminance meter BM-7, after 10 minutes operation (module)

Note 2: Definition of response time:


The output signals of photo detector are measured when the input signals are changed from "black" to "white" (falling time) and from "white" to "black" (rising time), respectively. The response time is defined as the time interval between the 10% and 90% of Amplitudes.

Refer to figure as below:

Normally White



Normally Black

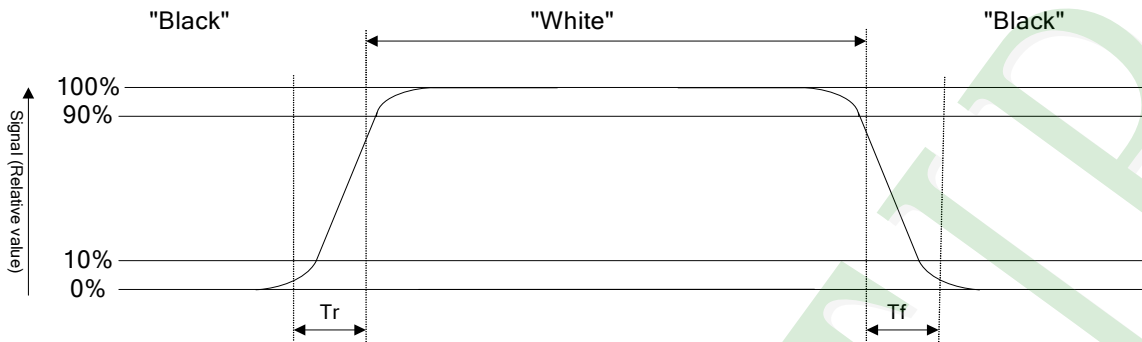


Note 3: Definition of contrast ratio:

Contrast ratio is calculated with the following formula

$$\text{Contrast ratio (CR)} = \frac{\text{Photo detector output when LCD is at "White" state}}{\text{Photo detector output when LCD is at "Black" state}}$$

Note 4: Definition of viewing angle:

Refer to figure as below:

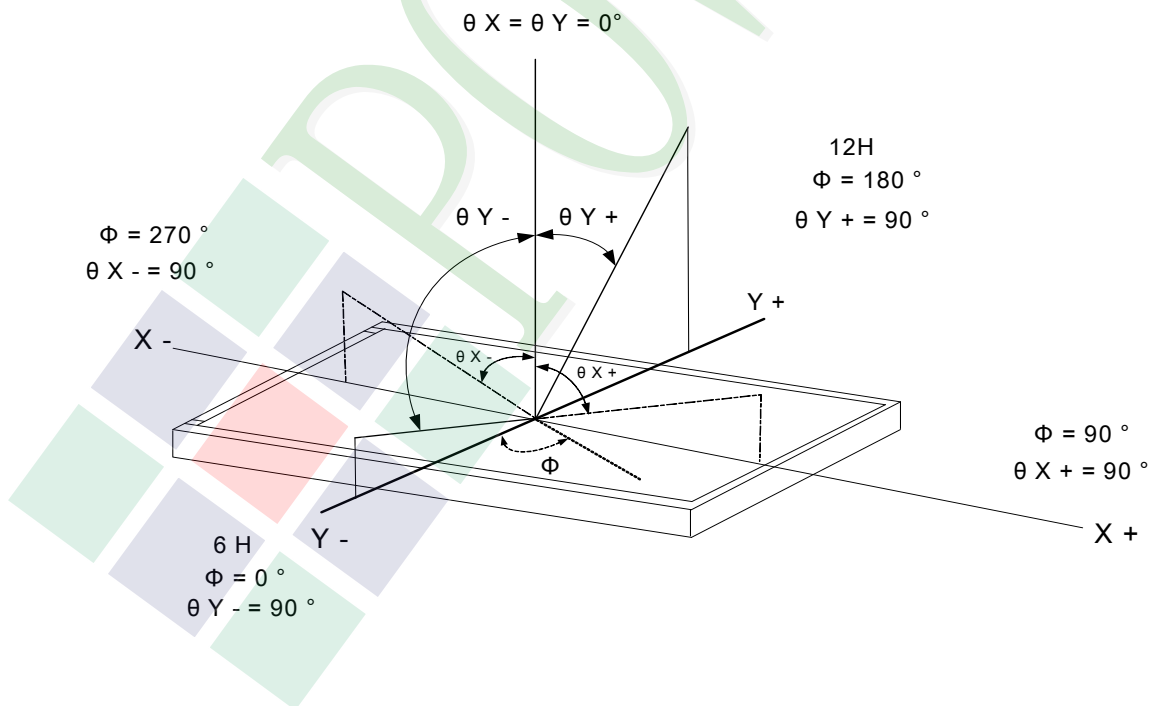

1.6 Backlight Characteristics

Maximum Ratings


<u>Item</u>	<u>Symbol</u>	<u>Min.</u>	<u>Max.</u>	<u>Unit</u>	<u>Remark</u>
LED Reverse Current	I_R	-	20	μA	Per LED
LED Reverse Voltage	V_R	-	5	V	

Electrical / Optical Characteristics

<u>Item</u>	<u>Symbol</u>	<u>Min.</u>	<u>Typ.</u>	<u>Max.</u>	<u>Unit</u>	<u>Remark</u>
LED Voltage	V_f	29.7	31.9	34.1	V	Note1
LED Current	I_f	-	180	-	mA	-
Average Brightness (without LCD) *1	I_V	18000	23000	28000	-	cd/m^2
CIE Color Coordinate (Without LCD)	X	0.255	0.295	0.335		
	Y	0.255	0.295	0.335		
LED life time	-	50,000	-	-	Hr	Note2

Note 1: The LED Supply Voltage is defined by the number of LED at $T_a=25^\circ C$ and $I_f=180\text{ mA}$

Note 2: The "LED life time" is defined as the module brightness decrease to 50% original brightness at $T_a=25^\circ C$ and $I_f=180\text{ mA}$. The LED life time could be decreased if operating I_L is larger than 180 mA

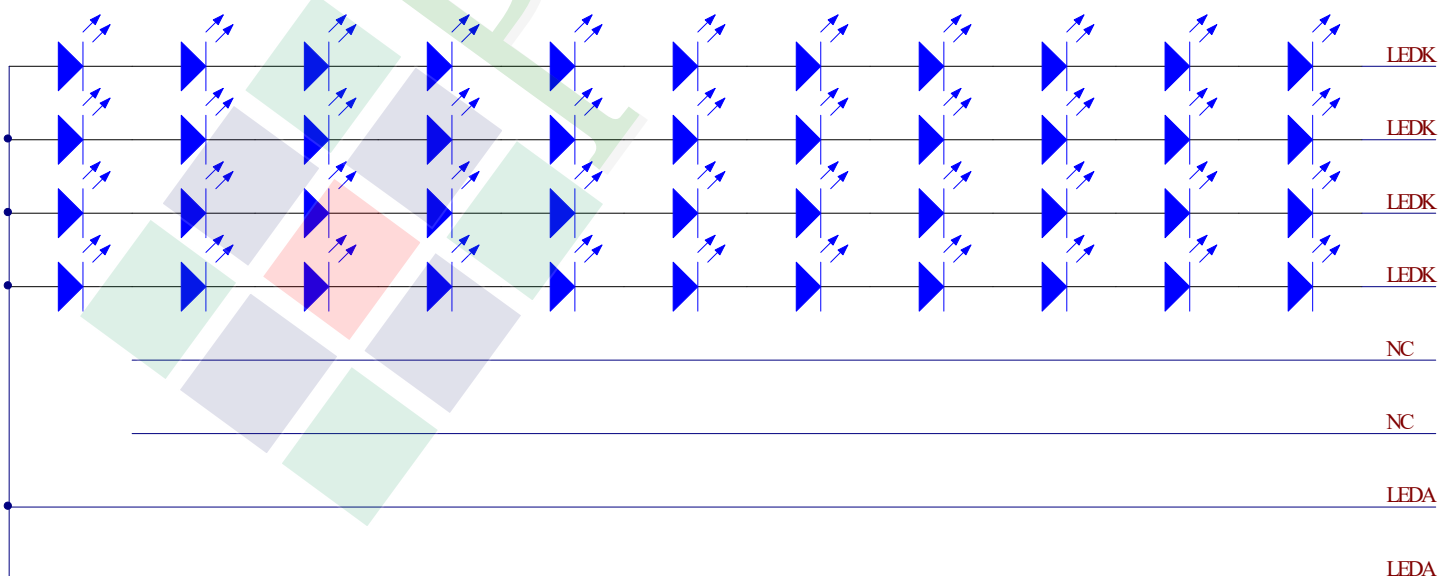

1.7 Touch Panel Characteristics

Features

<u>Item</u>	<u>Standard Value</u>
Touch Panel Size	10.1"
Touch type	Projective capacitive touch panel
Input Method	Finger
Support Operation	5 Points touch
Output Interface	I2C
IC	FT5726

Absolute Maximum Ratings

<u>Item</u>	<u>Symbol</u>	<u>Condition</u>	<u>Min.</u>	<u>Max.</u>	<u>unit</u>
Operating Temperature	T _{OP}	-	-30	+80	°C
Storage Temperature	T _{ST}	-	-40	+85	°C

I²C Address

<u>Bit7</u>	<u>Bit6</u>	<u>Bit5</u>	<u>Bit4</u>	<u>Bit3</u>	<u>Bit2</u>	<u>Bit1</u>	<u>Bit0</u>
0	1	1	1	0	0	0	R/W

R/W: 1 : Read
0 : write

DC Electrical Characteristics

<u>Item</u>	<u>Symbol</u>	<u>Condition</u>	<u>Min.</u>	<u>Typ.</u>	<u>Max.</u>	<u>unit</u>
Power Supply Voltage(I ² C)	VI2C	-	-	3.3	-	V

Optical Characteristics

<u>Item</u>	<u>Standard Value</u>	<u>unit</u>
Total light transmittance	85% or more	-
Haze	3% or less	-


2. Module Structure

2.1 Counter Drawing

2.1.1 LCM Mechanical Diagram

* See Appendix

2.1.2 Block Diagram

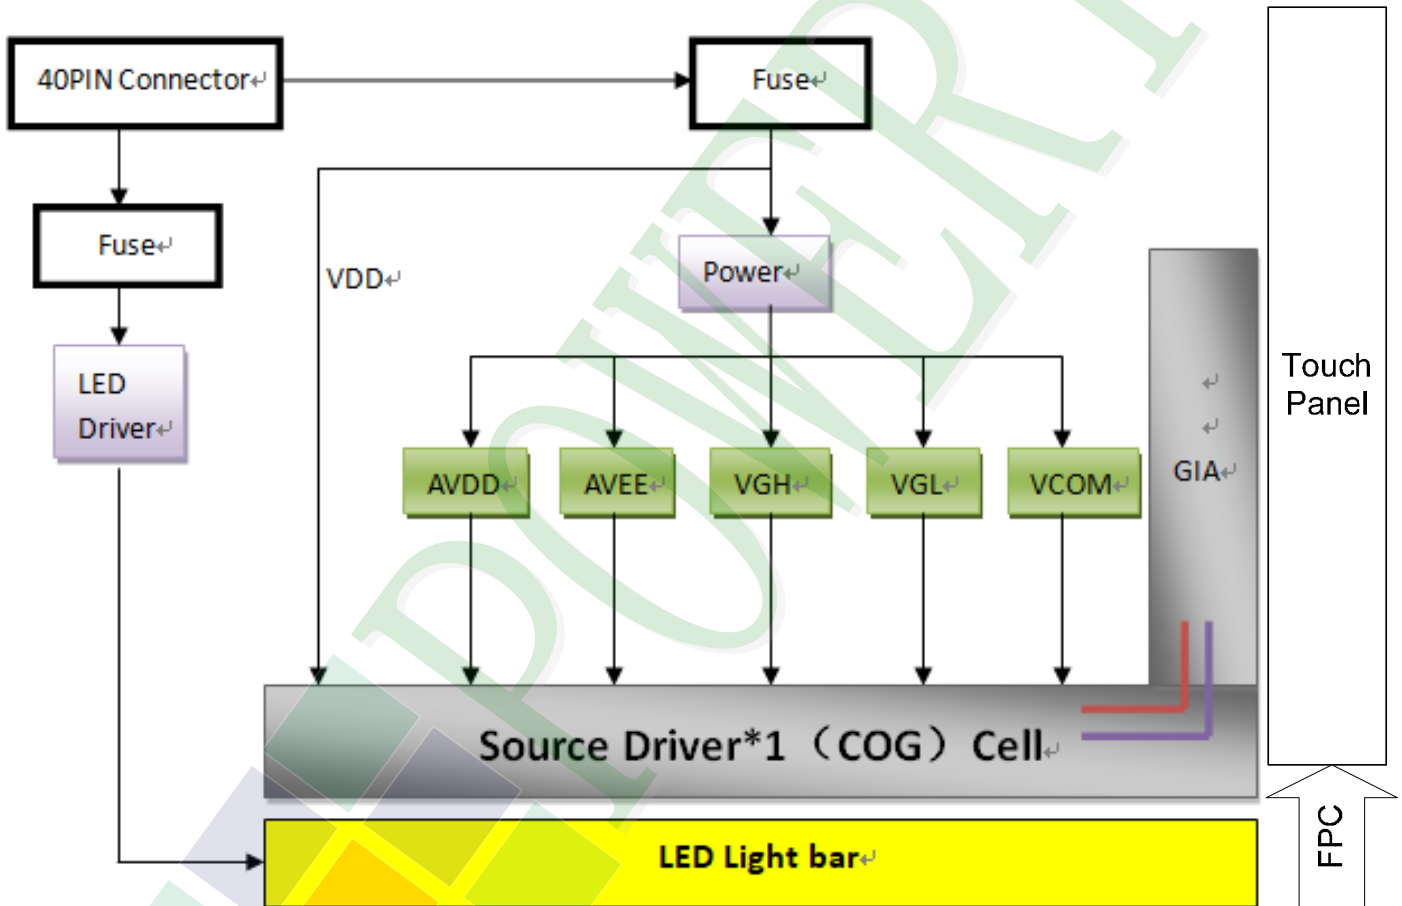

2.2 Interface Pin Description

TFT LCM Interface

CN2

Pin#	Name	Description
1	NC	No Connection.
2	VDD	Power Supply.
3	VDD	Power Supply.
4	NC	No Connection.
5	NC	No Connection.
6	NC	No Connection.
7	NC	No Connection.
8	D3N	MIPI DSI Differential Data Signal Pair 3
9	D3P	MIPI DSI Differential Data Signal Pair 3
10	GND	Power ground.
11	D2N	MIPI DSI Differential Data Signal Pair 2
12	D2P	MIPI DSI Differential Data Signal Pair 2
13	GND	Power ground.
14	CLKN	MIPI DSI Differential Clock Signal Pair
15	CLKP	MIPI DSI Differential Clock Signal Pair
16	GND	Power ground.
17	D1N	MIPI DSI Differential Data Signal Pair 1
18	D1P	MIPI DSI Differential Data Signal Pair 1
19	GND	Power ground.
20	D0N	MIPI DSI Differential Data Signal Pair 0
21	D0P	MIPI DSI Differential Data Signal Pair 0
22	GND	Power ground.
23	LED_GND	Ground for LED Driving.
24	LED_GND	Ground for LED Driving.
25	LED_GND	Ground for LED Driving.
26	NC	No Connection.
27	LED_PWM	PWM Input Signal for Backlight Diver.
28	LED_EN	Backlight Enable Pin.
29	NC	No Connection.

<u>Pin#</u>	<u>Name</u>	<u>Description</u>
30	NC	No Connection.
31	LED_VCC	Power Supply for Backlight Diver.
32	LED_VCC	Power Supply for Backlight Diver.
33	LED_VCC	Power Supply for Backlight Diver.
34	NC	No Connection.
35	BIST	Self Test Enable. When it is not used, please don't connect to GND, connecting to Normal High(3.3V) is recommended
36	NC	No Connection.
37	NC	No Connection.
38	NC	No Connection.
39	NC	No Connection.
40	NC	No Connection.

TP Connector Interface

CN1 I²C

<u>Pin No.</u>	<u>Symbol</u>	<u>Function</u>
1	GND	Ground.
2	I ² C_SDA	I ² C Data
3	I ² C_SCL	I ² C Clock
4	I ² C_INT	Active Low
5	I ² C_RST	Active low global reset signal input.
6	VI2C	Power Supply Voltage (3.3V)


2.3 Timing Characteristics

Input Timing Table

Parameter	Symbol	Value			Unit
		Min.	Typ.	Max.	
DCLK frequency @Frame rate=60Hz	F _{DCLK}	68.2	72.4	78.5	MHz
HSYNC period time	T _H	1380	1440	1500	DCLK
Horizontal display area	T _{HD}	1280			DCLK
HSYNC pulse width	T _{HPW}	Min.	2		
		Typ.	-		
		Max.	40		
HSYNC back porch(with pulse width)	T _{HBP}	88	88	88	DCLK
HSYNC front porch	T _{HFP}	12	72	132	DCLK
VSYNC period time	T _V	824	838	872	H
Vertical display area	T _{VD}	800			H
VSYNC pulse width	T _{VPW}	Min.	2		H
		Typ.	-		
		Max.	20		
VSYNC back porch(with pulse width)	T _{VBP}	23	23	23	H
VSYNC front porch	T _{VFP}	1	15	49	H


MIPI LP Transmitter AC Specification

Parameter		Symbol	Min	Typ	Max	Units	Notes
15%~85% rising time and falling time		TRLP /TFLP	-	-	25	ns	-
30%~85% rising time and falling time		TREOT	-	-	35	ns	-
Pulse width of LP exclusive-OR clock	First LP EXOR clock pulse after STOP state or Last pulse before stop state	TLP-PULSE-TX	50	-	-	ns	-
	All other pulses		50	-	-	ns	-
Period of the LP EXOR clock(LP Speed)		TLP-PER-TX	100	200	-	ns	-
Slew Rate @CLOAD =0pF		$\delta V/\delta tSR$	20	-	500	mV/ns	-
Slew Rate @CLOAD =5pF			20	-	200	mV/ns	-
Slew Rate @CLOAD =20pF			20	-	150	mV/ns	-
Slew Rate @CLOAD =70pF			20	-	100	mV/ns	-
Load Capacitance		TRLP	-	-	70	pF	-

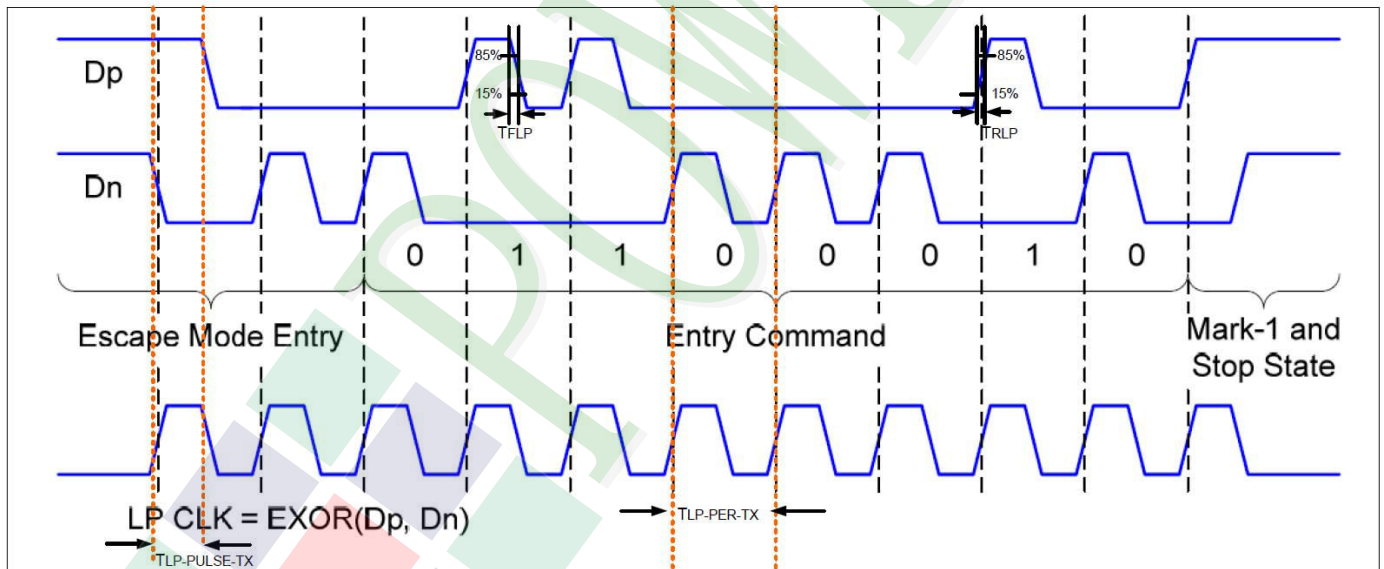

Turnaround Procedure Operation Timing Parameters

Parameter	Symbol	Min	Typ	Max	Units
Length of any Low-Power state period	TLPX	50	-	-	ns
Time-out before new TX side start driving	TTA-Sure	TLPX	-	2TLPX	ns
Time to drive LP-00 by new TX	TTA-GET	-	5TLPX	-	ns
Time to drive LP-00 after Turnaround Request	TTA-GO	-	4TLPX	-	ns

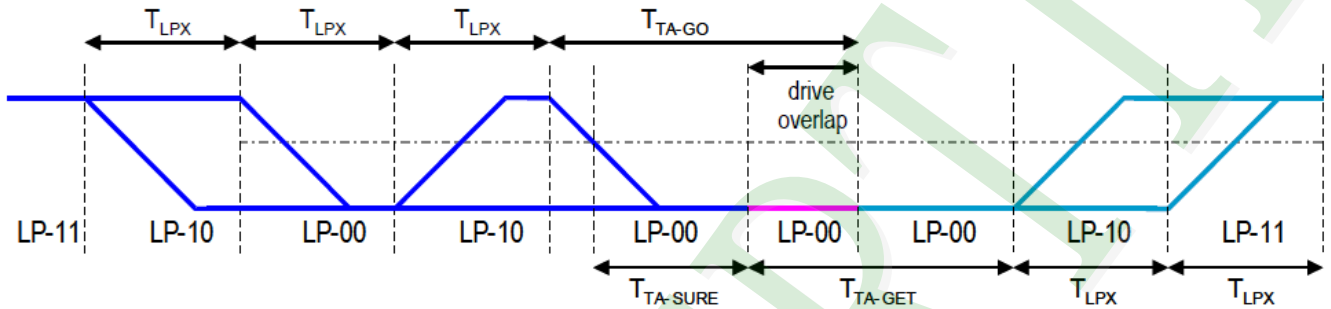

Timing requirements for RESETB

When RESETB of the reset pin equals to Low, it will be in the condition of reset. When it is in the condition of reset, it will make the device recover the initial set. However, in order to avoid the reset noise cause reset, there is a mechanism to judge about whether the reset is needed or not.

The closed interval of Low can be shown as the following.


(Test condition: VDDIO=2.3V~3.6V, VSS=0V, TA=-30 ~+85)


Parameter	Symbol	Conditions	Spec.			Unit
			Min.	Typ.	Max	
Reset low pulse width	Trst		20	-	-	μs



3. Quality Assurance System

3.1 Quality Assurance Flow Chart

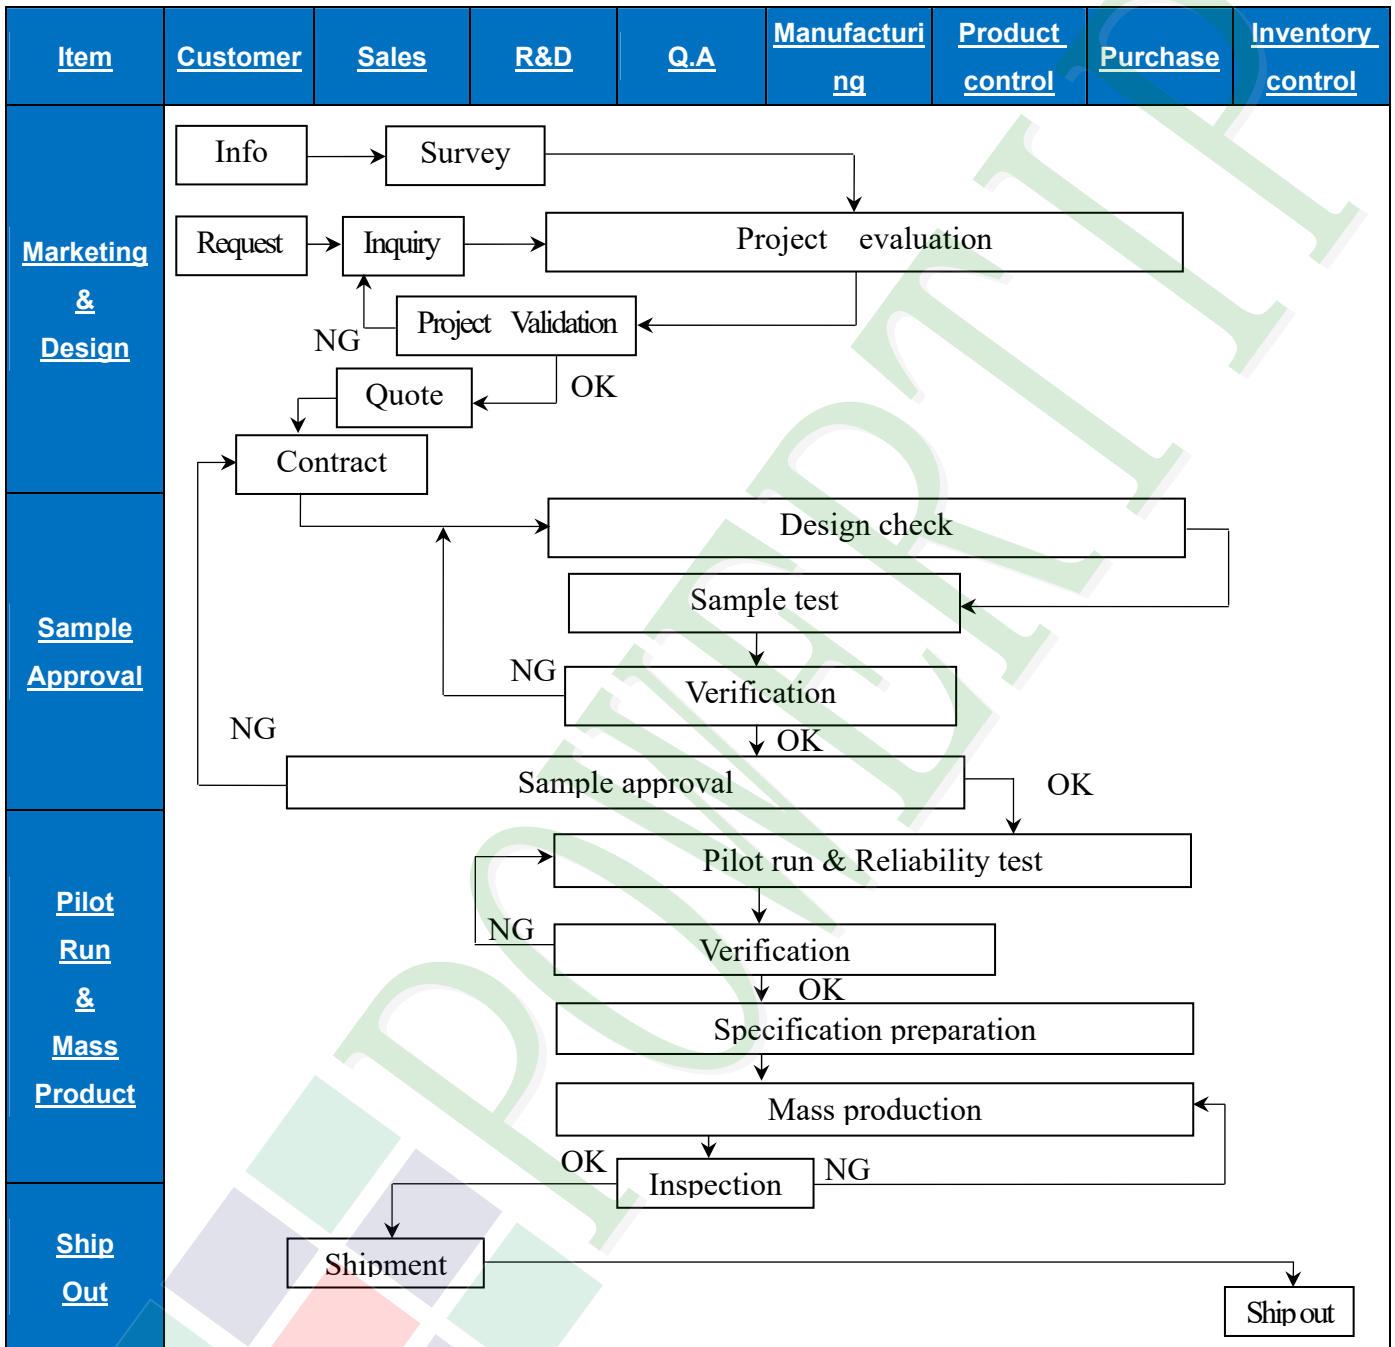

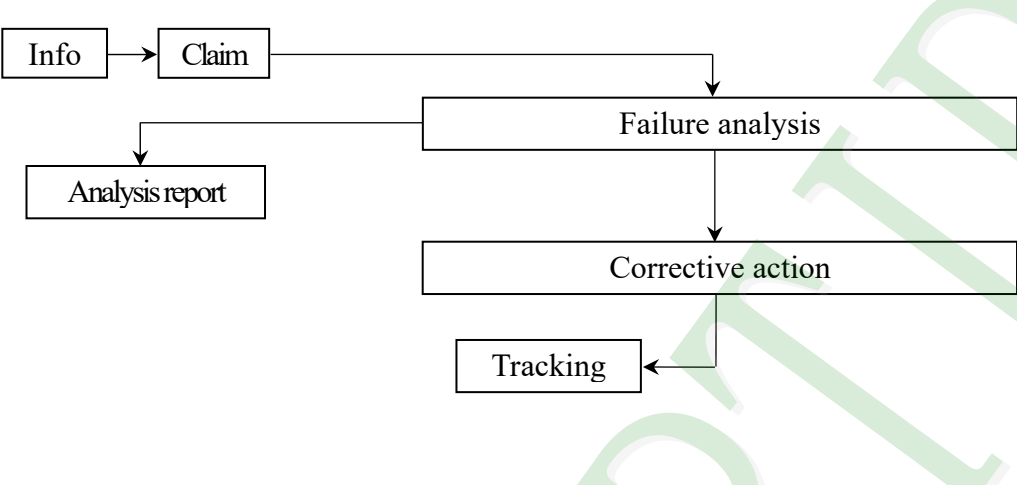
Item	Customer	Sales	R&D	Q.A	Manufacturing	Product control	Purchase	Inventory control
Sales Service	 <pre> graph TD Info[Info] --> Claim[Claim] Claim --> Failure[Failure analysis] Failure --> Report[Analysis report] Failure --> Action[Corrective action] Action --> Tracking[Tracking] </pre>							
Q.A Activity	<ol style="list-style-type: none"> 1. ISO 9001 Maintenance Activities 2. Process improvement proposal 3. Equipment calibration 4. Education And Training Activities 5. Standardization Management 							

3.2 Inspection Specification


- ◆Scope: The document shall be applied to TFT-LCD Module for 3.5"-15" (Ver.B01).
- ◆Inspection Standard: MIL-STD-105E Table Normal Inspection Single Sampling Level II.
- ◆Equipment: Gauge, MIL-STD, Powertip Tester, Sample
- ◆Defect Level: Major Defect AQL: 0.4; Minor Defect AQL: 1.5
- ◆OUT Going Defect Level: Sampling
- ◆Standard of the product appearance test:

a. Manner of appearance test:

- (1). The test best be under 20W×2 fluorescent light(about 300lux ~500lux) and distance of view must be at 30~40 cm.
- (2). The test direction is base on about around 45° of vertical line.

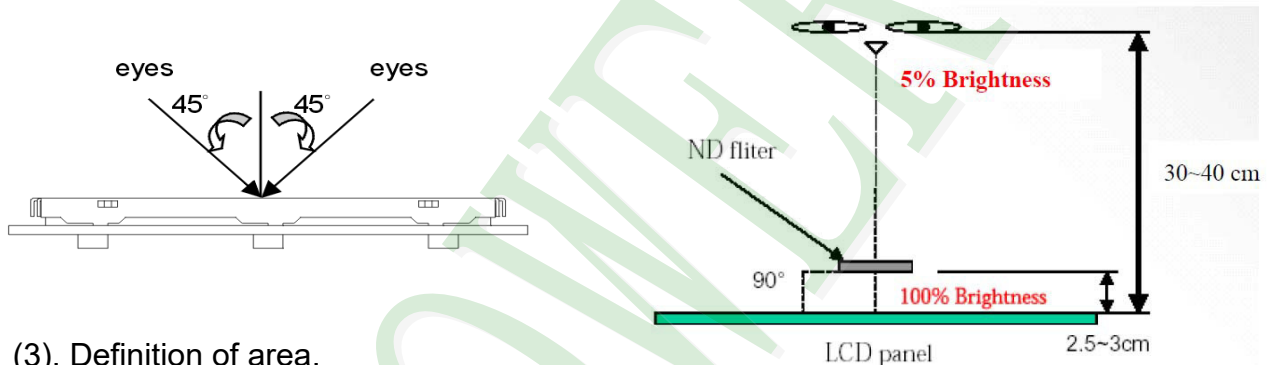

(3). Definition of area.


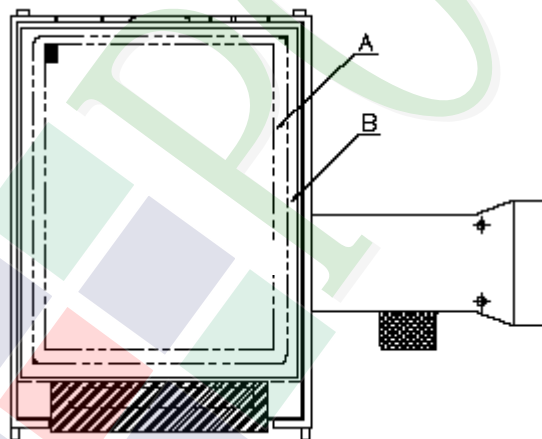



A area: viewing area



B area: Outside of viewing area




(4). Standard of inspection : (Unit : mm)

NO	Item	Criterion	Level												
01	Product condition	1.1 The part number is inconsistent with work order of production.	Major												
		1.2 Mixed product types.	Major												
		1.3 Assembled in inverse direction.	Major												
02	Quantity	2.1 The quantity is inconsistent with work order of production.	Major												
03	Outline dimension	3.1 Product dimension and structure must conform to structure diagram.	Major												
04	Electrical Testing	4.1 Missing line character and icon.	Major												
		4.2 No function or no display.	Major												
		4.3 Display malfunction.	Major												
		4.4 LCD viewing angle defect.	Major												
		4.5 Current consumption exceeds product specifications.	Major												
		4.6 Mura cannot be seen through 5% ND filter at 50% Gray, should be judged by the viewing angle of 90 degree.	Minor												
05	Dot defect (Bright dot, Dark dot) On -display	<table border="1"> <thead> <tr> <th></th> <th>Item</th> <th>Acceptance (Q'ty)</th> </tr> </thead> <tbody> <tr> <td rowspan="4">Dot Defect</td> <td>Bright Dot</td> <td>≤ 4</td> </tr> <tr> <td>Dark Dot</td> <td>≤ 5</td> </tr> <tr> <td>Joint Dot</td> <td>≤ 3</td> </tr> <tr> <td>Total</td> <td>≤ 7</td> </tr> </tbody> </table>		Item	Acceptance (Q'ty)	Dot Defect	Bright Dot	≤ 4	Dark Dot	≤ 5	Joint Dot	≤ 3	Total	≤ 7	Minor
			Item	Acceptance (Q'ty)											
		Dot Defect	Bright Dot	≤ 4											
			Dark Dot	≤ 5											
			Joint Dot	≤ 3											
Total	≤ 7														
5.1 Inspection pattern: full white, full black, Red, Green and blue screens.															
5.2 It is defined as dot defect if defect area $> 1/2$ dot.															
5.3 The distance between two dot defect ≥ 5 mm.															
5.4 Bright dot : Dots appear bright and unchanged in visible with 5% ND filter is defined.															
5.5 Tiny bright dot: bright dot area $\leq 1/2$ dot.															
	a. Dots appear bright and unchanged in visible with 5% ND filter is defined defect and is judged in accordance with 6.1														
	b. Dots invisible with 5% ND Filter is Ignored														

NO	Item	Criterion	Level																																							
06	Black or white Dot, scratch, contamination Round type  $\Phi = (x + y) / 2$ Line type 	6.1 Round type (Non-display or display): <table border="1" data-bbox="478 380 1292 649"> <thead> <tr> <th rowspan="2">Dimension (diameter: Φ)</th> <th colspan="2">Acceptance (Q'ty)</th> </tr> <tr> <th>A area</th> <th>B area</th> </tr> </thead> <tbody> <tr> <td>$\Phi \leq 0.25$</td> <td>Ignore</td> <td rowspan="4">Ignore</td> </tr> <tr> <td>$0.25 < \Phi \leq 0.50$</td> <td>5</td> </tr> <tr> <td>$\Phi > 0.50$</td> <td>0</td> </tr> <tr> <td>Total</td> <td>5</td> </tr> </tbody> </table>	Dimension (diameter: Φ)	Acceptance (Q'ty)		A area	B area	$\Phi \leq 0.25$	Ignore	Ignore	$0.25 < \Phi \leq 0.50$	5	$\Phi > 0.50$	0	Total	5	Minor																									
		Dimension (diameter: Φ)		Acceptance (Q'ty)																																						
A area	B area																																									
$\Phi \leq 0.25$	Ignore	Ignore																																								
$0.25 < \Phi \leq 0.50$	5																																									
$\Phi > 0.50$	0																																									
Total	5																																									
6.2 Line type(Non-display or display): <table border="1" data-bbox="430 761 1356 1344"> <thead> <tr> <th rowspan="2">module size</th> <th rowspan="2">Length (L)</th> <th rowspan="2">Width (W)</th> <th colspan="2">Acceptance (Q'ty)</th> </tr> <tr> <th>A area</th> <th>B area</th> </tr> </thead> <tbody> <tr> <td rowspan="4">3.5" to less 9"</td> <td>---</td> <td>$W \leq 0.03$</td> <td>Ignore</td> <td rowspan="4">Ignore</td> </tr> <tr> <td>$L \leq 10.0$</td> <td>$0.03 < W \leq 0.05$</td> <td>4</td> </tr> <tr> <td>$L \leq 5.0$</td> <td>$0.05 < W \leq 0.10$</td> <td>2</td> </tr> <tr> <td>---</td> <td>$W > 0.10$</td> <td>As round type</td> </tr> <tr> <td colspan="3">Total</td> <td>5</td> <td></td> </tr> <tr> <td rowspan="4">9" to 15"</td> <td>---</td> <td>$W \leq 0.05$</td> <td>Ignore</td> <td rowspan="4">Ignore</td> </tr> <tr> <td>$L \leq 10.0$</td> <td>$0.05 < W \leq 0.10$</td> <td>5</td> </tr> <tr> <td>---</td> <td>$W > 0.10$</td> <td>As round type</td> </tr> <tr> <td colspan="3">Total</td> <td>5</td> </tr> </tbody> </table>	module size	Length (L)	Width (W)	Acceptance (Q'ty)		A area	B area	3.5" to less 9"	---	$W \leq 0.03$	Ignore	Ignore	$L \leq 10.0$	$0.03 < W \leq 0.05$	4	$L \leq 5.0$	$0.05 < W \leq 0.10$	2	---	$W > 0.10$	As round type	Total			5		9" to 15"	---	$W \leq 0.05$	Ignore	Ignore	$L \leq 10.0$	$0.05 < W \leq 0.10$	5	---	$W > 0.10$	As round type	Total			5	
module size				Length (L)	Width (W)	Acceptance (Q'ty)																																				
	A area	B area																																								
3.5" to less 9"	---	$W \leq 0.03$	Ignore	Ignore																																						
	$L \leq 10.0$	$0.03 < W \leq 0.05$	4																																							
	$L \leq 5.0$	$0.05 < W \leq 0.10$	2																																							
	---	$W > 0.10$	As round type																																							
Total			5																																							
9" to 15"	---	$W \leq 0.05$	Ignore	Ignore																																						
	$L \leq 10.0$	$0.05 < W \leq 0.10$	5																																							
	---	$W > 0.10$	As round type																																							
	Total				5																																					
07	Polarizer Bubble	<table border="1" data-bbox="430 1456 1340 1769"> <thead> <tr> <th rowspan="2">Dimension (diameter: Φ)</th> <th colspan="2">Acceptance (Q'ty)</th> </tr> <tr> <th>A area</th> <th>B area</th> </tr> </thead> <tbody> <tr> <td>$\Phi \leq 0.25$</td> <td>Ignore</td> <td rowspan="5">Ignore</td> </tr> <tr> <td>$0.25 < \Phi \leq 0.50$</td> <td>4</td> </tr> <tr> <td>$0.50 < \Phi \leq 0.80$</td> <td>1</td> </tr> <tr> <td>$\Phi > 0.80$</td> <td>0</td> </tr> <tr> <td>Total</td> <td>5</td> </tr> </tbody> </table>	Dimension (diameter: Φ)	Acceptance (Q'ty)		A area	B area	$\Phi \leq 0.25$	Ignore	Ignore	$0.25 < \Phi \leq 0.50$	4	$0.50 < \Phi \leq 0.80$	1	$\Phi > 0.80$	0	Total	5	Minor																							
Dimension (diameter: Φ)	Acceptance (Q'ty)																																									
	A area	B area																																								
$\Phi \leq 0.25$	Ignore	Ignore																																								
$0.25 < \Phi \leq 0.50$	4																																									
$0.50 < \Phi \leq 0.80$	1																																									
$\Phi > 0.80$	0																																									
Total	5																																									

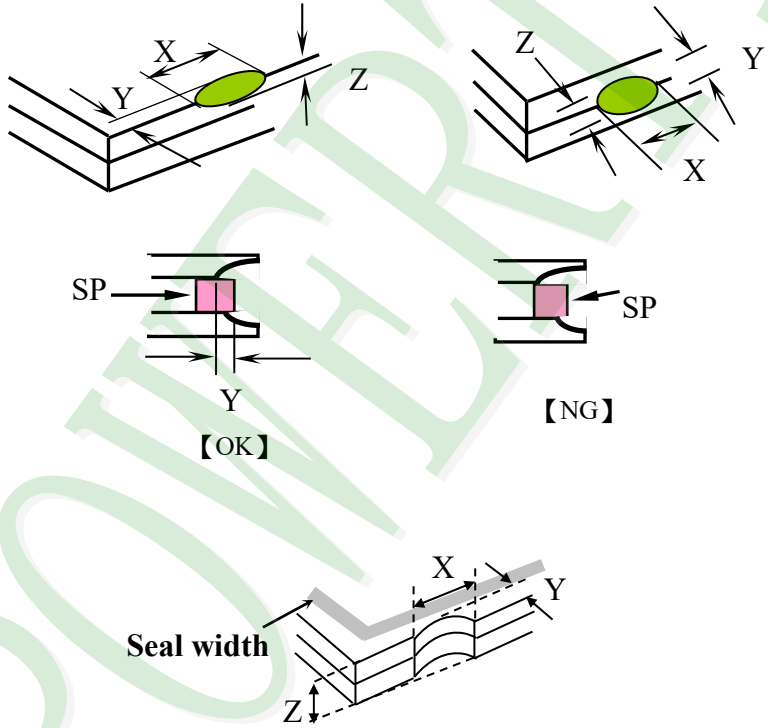NO	Item	Criterion	Level						
08	The crack of glass	Symbols : X: The length of crack Y: The width of crack. Z: The thickness of crack W: terminal length T: The thickness of glass a : LCD side length	Minor						
		8.1 General glass chip: 8.1.1 Chip on panel surface and crack between panels:  <table border="1" data-bbox="539 1503 1353 1798"> <thead> <tr> <th>X</th> <th>Y</th> <th>Z</th> </tr> </thead> <tbody> <tr> <td>$\leq \leq a$</td> <td>Crack can't enter viewing area</td> <td>$\leq 1/2 t$</td> </tr> <tr> <td>$\leq a$</td> <td>Crack can't exceed the half of SP width.</td> <td>$1/2 t < Z \leq 2 t$</td> </tr> </tbody> </table>		X	Y	Z	$\leq \leq a$	Crack can't enter viewing area	$\leq 1/2 t$
X	Y	Z							
$\leq \leq a$	Crack can't enter viewing area	$\leq 1/2 t$							
$\leq a$	Crack can't exceed the half of SP width.	$1/2 t < Z \leq 2 t$							

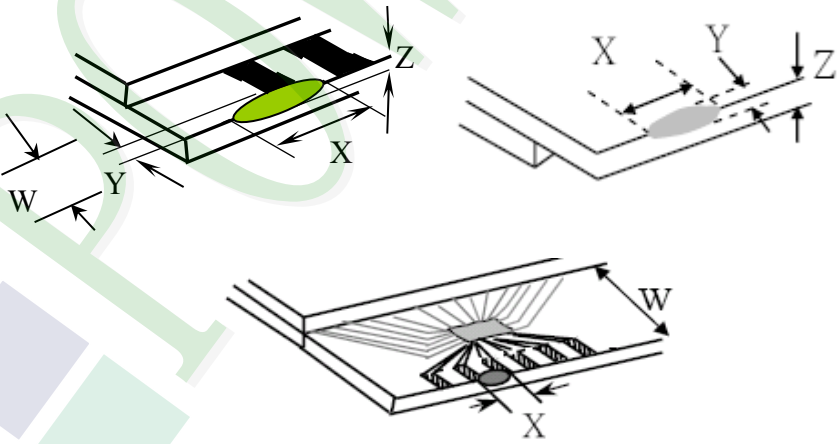NO	Item	Criterion	Level												
08	The crack of glass	<p>Symbols :</p> <p>X: The length of crack Z: The thickness of crack t: The thickness of glass</p> <p>Y: The width of crack. W: terminal length a: LCD side length</p> <hr/> <p>8.1.2 Corner crack:</p>  <table border="1" data-bbox="520 763 1337 1055"> <thead> <tr> <th><u>X</u></th> <th><u>Y</u></th> <th><u>Z</u></th> </tr> </thead> <tbody> <tr> <td>$\leq 1/5 a$</td> <td>Crack can't enter viewing area</td> <td>$Z \leq 1/2 t$</td> </tr> <tr> <td>$\leq 1/5 a$</td> <td>Crack can't exceed the half of SP width.</td> <td>$1/2 t < Z \leq 2 t$</td> </tr> </tbody> </table>	<u>X</u>	<u>Y</u>	<u>Z</u>	$\leq 1/5 a$	Crack can't enter viewing area	$Z \leq 1/2 t$	$\leq 1/5 a$	Crack can't exceed the half of SP width.	$1/2 t < Z \leq 2 t$				
		<u>X</u>	<u>Y</u>	<u>Z</u>											
$\leq 1/5 a$	Crack can't enter viewing area	$Z \leq 1/2 t$													
$\leq 1/5 a$	Crack can't exceed the half of SP width.	$1/2 t < Z \leq 2 t$													
		<p>8.2 Protrusion over terminal:</p> <p>8.2.1 Chip on electrode pad:</p>  <table border="1" data-bbox="560 1693 1347 1868"> <thead> <tr> <th></th> <th><u>X</u></th> <th><u>Y</u></th> <th><u>Z</u></th> </tr> </thead> <tbody> <tr> <td><u>Front</u></td> <td>$\leq a$</td> <td>$\leq 1/2 W$</td> <td>$\leq t$</td> </tr> <tr> <td><u>Back</u></td> <td>$\leq a$</td> <td>$\leq W$</td> <td>$\leq 1/2 t$</td> </tr> </tbody> </table>		<u>X</u>	<u>Y</u>	<u>Z</u>	<u>Front</u>	$\leq a$	$\leq 1/2 W$	$\leq t$	<u>Back</u>	$\leq a$	$\leq W$	$\leq 1/2 t$	Minor
	<u>X</u>	<u>Y</u>	<u>Z</u>												
<u>Front</u>	$\leq a$	$\leq 1/2 W$	$\leq t$												
<u>Back</u>	$\leq a$	$\leq W$	$\leq 1/2 t$												

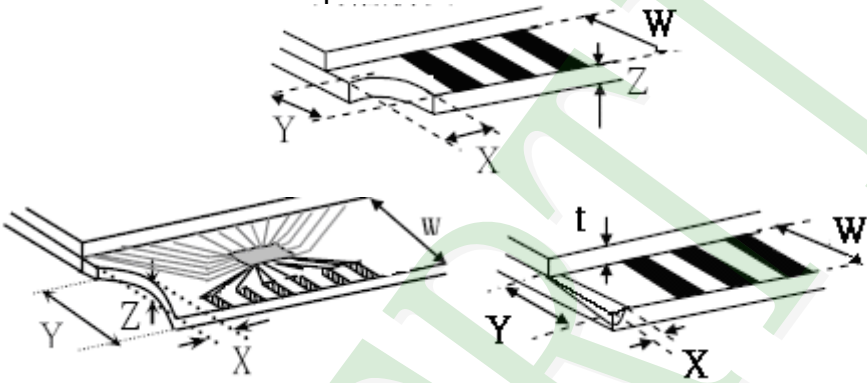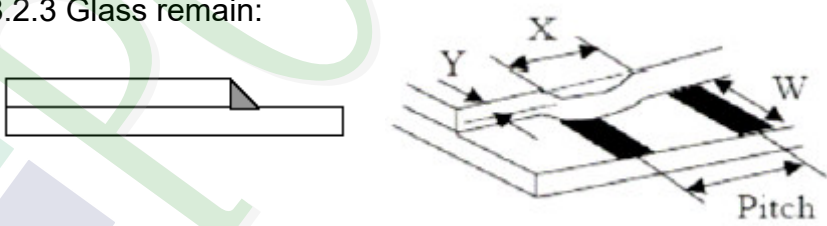NO	Item	Criterion	Level												
08	The crack of glass	<p>Symbols:</p> <p>X: The length of crack Y: The width of crack. Z: The thickness of crack W: terminal length t: The thickness of glass a: LCD side length</p> <p>8.2.2 Non-conductive portion:</p>  <table border="1" data-bbox="625 958 1257 1086"> <thead> <tr> <th><u>X</u></th> <th><u>Y</u></th> <th><u>Z</u></th> </tr> </thead> <tbody> <tr> <td>$\leq 1/3 a$</td> <td>$\leq W$</td> <td>$\leq t$</td> </tr> </tbody> </table> <p>If the chipped area touches the ITO terminal, over 2/3 of the ITO must remain and be inspected according to electrode terminal specifications.</p> <p>8.2.3 Glass remain:</p>  <table border="1" data-bbox="545 1585 1241 1713"> <thead> <tr> <th><u>X</u></th> <th><u>Y</u></th> <th><u>Z</u></th> </tr> </thead> <tbody> <tr> <td>$\leq a$</td> <td>$\leq 1/3 W$</td> <td>$\leq t$</td> </tr> </tbody> </table> <p>8.2.4 Cracking:</p>  <p>Not Allowed</p>	<u>X</u>	<u>Y</u>	<u>Z</u>	$\leq 1/3 a$	$\leq W$	$\leq t$	<u>X</u>	<u>Y</u>	<u>Z</u>	$\leq a$	$\leq 1/3 W$	$\leq t$	Minor
<u>X</u>	<u>Y</u>	<u>Z</u>													
$\leq 1/3 a$	$\leq W$	$\leq t$													
<u>X</u>	<u>Y</u>	<u>Z</u>													
$\leq a$	$\leq 1/3 W$	$\leq t$													

NO	Item	Criterion	Level
09	Backlight elements	9.1 Backlight can't work normally.	Major
		9.2 Backlight doesn't light or color is wrong.	Major
		9.3 Illumination source flickers when lit.	Major
10	General appearance	10.1 Pin type, quantity, dimension must match type in structure diagram.	Major
		10.2 No short circuits in components on PCB or FPC.	Major
		10.3 Parts on PCB or FPC must be: no wrong parts, missing parts or excess parts.	Major
		10.4 Product packaging must the same as specified on packaging specification sheet.	Minor
		10.5 The folding and peeled off in polarizer are not acceptable.	Minor
		10.6 The PCB or FPC between B/L assembled distance (PCB or FPC) is ≤ 1.5 mm.	Minor

5. PRECAUTION RELATING PRODUCT HANDLING

5.1 SAFETY

- 5.1.1 If the LCD panel breaks, be careful not to get the liquid crystal to touch your skin.
- 5.1.2 If the liquid crystal touches your skin or clothes, please wash it off immediately by using soap and water.

5.2 HANDLING

- 5.2.1 Avoid any strong mechanical shock which can break the glass.
- 5.2.2 Avoid static electricity which can damage the CMOS LSI—When working with the module, be sure to ground your body and any electrical equipment you may be using.
- 5.2.3 Do not remove the panel or frame from the module.
- 5.2.4 The polarizing plate of the display is very fragile. So, please handle it very carefully, do not touch, push or rub the exposed polarizing with anything harder than an HB pencil lead (glass, tweezers, etc.)
- 5.2.5 Do not wipe the polarizing plate with a dry cloth, as it may easily scratch the surface of plate.
- 5.2.6 Do not touch the display area with bare hands, this will stain the display area.
- 5.2.7 Do not use ketonics solvent & aromatic solvent. Use with a soft cloth soaked with a cleaning naphtha solvent.
- 5.2.8 To control temperature and time of soldering is $320 \pm 10^{\circ}\text{C}$ and 3-5 sec.
- 5.2.9 To avoid liquid (include organic solvent) stained on LCM
- 5.2.10 Caution!(LCM products with Capacitive Touch Panel)
Strong EMI-sources such as switch-mode power supplies (SMPS) can lead to touch malfunction (e.g. ghost-touches).
Therefore, the touch needs to be thoroughly tested inside the target application.
- 5.2.11 CAUTION: Continuously displaying same static image will result in high possibility of image sticking/image burn-in effect due to TFT panel characteristic.
- 5.2.12 Double-sided tape designed to be attach with the customer's mechanical device, please follow up the rules and regulations published by the original manufacturer of double-sided tape for the attachment operation.

5.3 STORAGE

- 5.3.1 Store the panel or module in a dark place where the temperature is $25^{\circ}\text{C} \pm 5^{\circ}\text{C}$ and the humidity is below 65% RH.
- 5.3.2 Do not place the module near organics solvents or corrosive gases.
- 5.3.3 Do not crush, shake, or jolt the module.

5.4 TERMS OF WARRANTY

- 5.4.1 Applicable warrant period The period is within thirteen months since the date of shipping out under normal using and storage conditions.
- 5.4.2 Unaccepted responsibility
This product has been manufactured to your company's specification as a part for use in your company's general electronic products. It is guaranteed to perform according to delivery specifications. For any other use apart from general electronic equipment, we cannot take responsibility if the product is used in nuclear power control equipment, aerospace equipment, fire and security systems or any other applications in which there is a direct risk to human life and where extremely high levels of reliability are required.

Approve	Check	Contact
Bright	Tina	Clare

Documents NO. PKG-PH128800T007-ZHC02


1. 包裝材料規格表(Packaging Material) : (per carton)

No.	Item	Model	Dimensions (mm)	1Pcs Weight	Quantity	Total Weight
1	成品 (LCD)	PH128800T007-ZHC02	254.96 X 173.6	0.414	288	119.232
2	多層薄膜(1)POF	OTFILM0BA03ABA	—————	—————	48	—————
3	TRAY 盤 (2)Tray	TYSG000000067	517 X 377 X 18.8	0.217	192	41.664
4	內盒(3)Product Box	BX00000000071	558 X 393 X 68	0.6	48	28.8
5	保利龍板(4)Polylon board	OTPLB00PL08ABA	550 X 393 X 20	0.0284	32	0.9088
6	外紙箱(5)Carton	BX57041027CCBA	570 X 410 X 265	1.4208	16	22.7328
7	棧板(6)Carton	OTPALLET005ABA	1200 X 1000 X 140	8.0	1	8.0
8	EPE(7)EPE	OTFOAMEP0003BA	333 X 218 X 10	0.022	48	1.056
9						

2. 一整箱總重量 (Total LCD Weight in carton) : 222.39 Kg±10%

3. 單箱數量規格表(Packaging Specifications and Quantity) :

(1)LCD quantity per box : no per tray	2	x no of tray	3	=	6
(2)Total LCD quantity in carton : quantity per box	6	x no of boxes	3	=	18
(3)Total LCM quantity in pallet : quantity per carton	18	x no of boxes	16	=	288

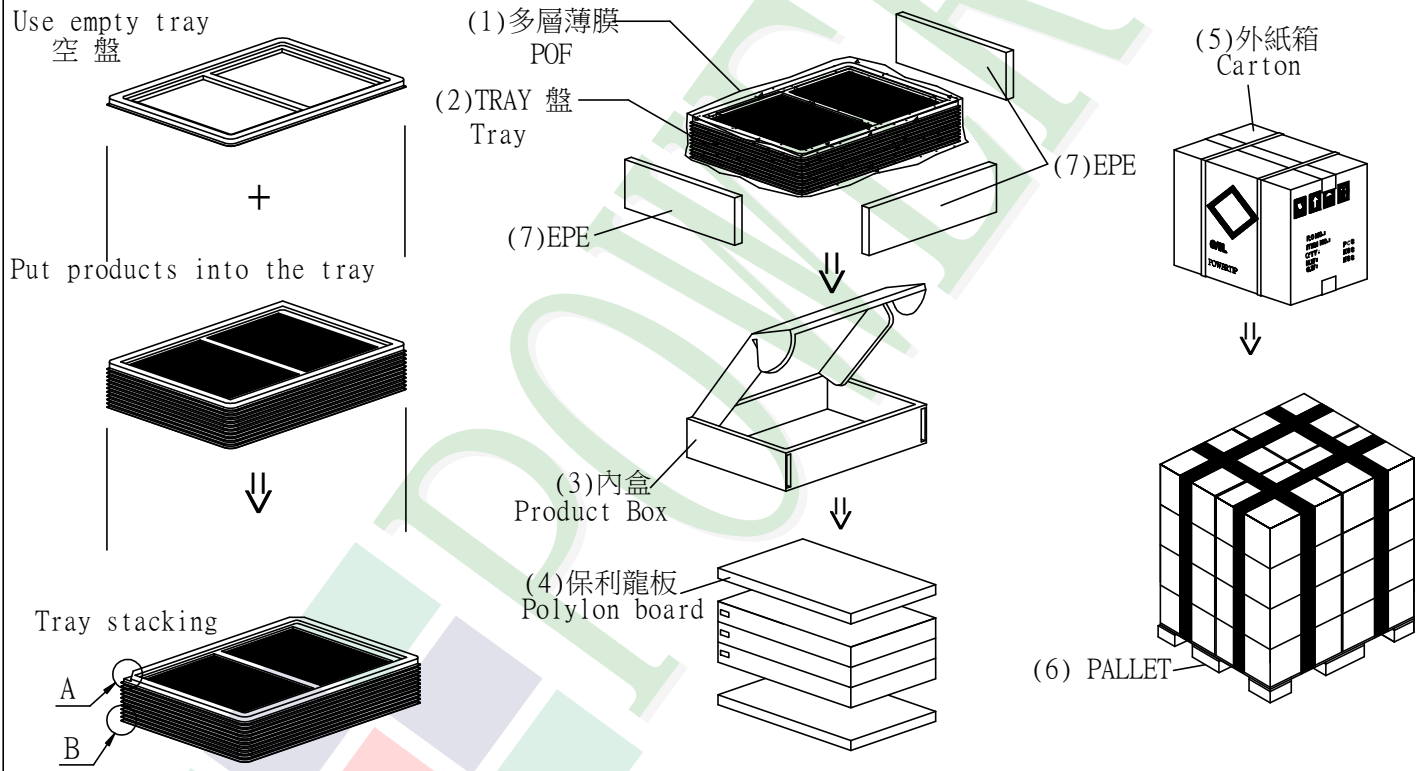


特 記 事 項 (REMARK)



1. TRAY盤相疊時, 需旋轉180度, 請詳見B視圖
Rotate tray 180 degrees and place on top of stack.
Check the tray stack using Fig. B.

2. OTFOAMEP0003BA可裁 4 PCS:
尺寸 333.0 X 54.5mm
2. OTFOAMEP0003BA cut 4 PCS:
Size: 333.0 X 54.5mm

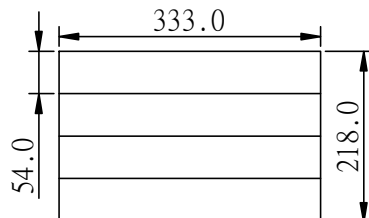



ALL TECHNOLOGIES. ALL COMPETENCIES. ONE SPECIALIST.



DATA MODUL AG
Landsberger Straße 322 DE-
80687 Munich
Phone: +49-89-56017-0

DATA MODUL WEIKERSHEIM GMBH
Lindenstraße 8
DE-97990 Weikersheim Phone:
+49-7934-101-0



More information and worldwide locations can be found at

www.data-modul.com