

### SPECIFICATIONS

<b>CUSTOMER</b>	:	
<b>SAMPLE CODE</b>	:	SH320240T-023-I03Q
<b>MASS PRODUCTION CODE</b>	:	PH320240T-023-I03Q
<b>SAMPLE VERSION</b>	:	01
<b>SPECIFICATIONS EDITION</b>	:	006
<b>DRAWING NO. (Ver.)</b>	:	LMD-PH320240T-023-I03Q (Ver.003)
<b>PACKAGING NO. (Ver.)</b>	:	PKG-PH320240T-023-I03Q (Ver.001)


**Customer Approved**

**Date:**

Approved	Checked	Designer
<p style="margin: 0;">黃秋源 Oliver Huang</p>	<p style="margin: 0;">石建莊 Stone Shin</p>	<p style="margin: 0;">黃俊清 Ackey Huang</p>

- Preliminary specification for design input
- Specification for sample approval



### POWER TIP TECH. CORP.

<b>Headquarters:</b> No.8, 6 <sup>th</sup> Road, Taichung Industrial Park, Taichung, Taiwan 台中市 407 工業區六路 8 號	TEL: 886-4-2355-8168 FAX: 886-4-2355-8166	E-mail: <a href="mailto:sales@powertip.com.tw">sales@powertip.com.tw</a> Http://www.powertip.com.tw
---	--	--



## Contents

### 1. SPECIFICATIONS

- 1.1 Features
- 1.2 Mechanical Specifications
- 1.3 Absolute Maximum Ratings
- 1.4 DC Electrical Characteristics
- 1.5 Optical Characteristics
- 1.6 Backlight Characteristics
- 1.7 Touch Panel Characteristics

### 2. MODULE STRUCTURE

- 2.1 Counter Drawing
- 2.2 Interface Pin Description
  - 2.2.1 Refer Initial code
- 2.3 Timing Characteristics

### 3. QUALITY ASSURANCE SYSTEM

- 3.1 Quality Assurance Flow Chart
- 3.2 Inspection Specification

### 4. RELIABILITY TEST

- 4.1 Reliability Test Condition

### 5. PRECAUTION RELATING PRODUCT HANDLING

- 5.1 Safety
- 5.2 Handling
- 5.3 Storage
- 5.4 Terms of Warranty

Appendix : LCM Drawing  
LCM Packaging Specifications

Note : For detailed information please refer to IC data sheet :  
Primacy(TFT LCD): Himax: HX8238-D

## 1. SPECIFICATIONS

### 1.1 Features

#### Main LCD Panel

Item	Standard Value
Display Type	320* (R、G、B) * 240 Dots
LCD Type	Normally white , Transmissive type
Screen size(inch)	3.5(Diagonal)
Viewing Direction	6 O'clock
Color configuration	R.G.B. vertical stripe
Backlight	White LED
Interface	Digital 24-bits Parallel RGB HSYNC,VSYNC.3Wires SPI
Other (controller / driver IC)	Himax: HX8238-D
ROHS	THIS PRODUCT CONFORMS THE ROHS OF PTC Detail information please refer website : <a href="http://www.powertip.com.tw/news.php?area_id_view=1085560481/">http://www.powertip.com.tw/news.php?area_id_view=1085560481/</a>

### 1.2 Mechanical Specifications

Item	Standard Value	Unit
Outline Dimension	76.9(W) * 63.9 (L) * 4.75 (H)(Max)	mm

#### LCD panel

Item	Standard Value	Unit
Active Area	70.08 (W) * 52.56 (L)	mm

#### Touch panel

Item	Standard Value	Unit
Viewing Area(T/P)	72.08 (W) x 54.56 (L)	mm
Active Area(T/P)	71.08 (W) x 53.56 (L)	mm

Note : For detailed information please refer to LCM drawing

### 1.3 Absolute Maximum Ratings

#### Module

Item	Symbol	Condition	Min.	Max.	Unit
System Power Supply Voltage	VDD	GND=0	-0.3	4.0	V
Booster Reference Supply Voltage	VCI	GND=0	GND-0.3	3.96	V
Operating Temperature	T <sub>OP</sub>	Excluded T/P	-20	70	°C
Storage Temperature	T <sub>ST</sub>	Excluded T/P	-30	80	°C
Storage Humidity	HD	Ta < 60 °C	20	90	%RH

### 1.4 DC Electrical Characteristics

#### Module

GND = 0V, Ta = 25 °C

Item	Symbol	Condition	Min.	Typ.	Max.	Unit
Power Supply Voltage	VDD	-	3.0	3.3	3.6	V
Booster Reference Supply Voltage	VCI	-	3.0	3.3	3.6	V
V <sub>COM</sub> High Voltage	V <sub>COMH</sub>	-	-	-	5.54	V
V <sub>COM</sub> Low Voltage	V <sub>COML</sub>	-	-2.8	-	-	V
Input H/L Level Voltage	V <sub>IH</sub>	-	0.8VDD	-	VDD	V
	V <sub>IL</sub>	-	0	-	0.2VDD	V
Output H/L Level Voltage	V <sub>OH</sub>	-	0.9VDD	-	VDD	V
	V <sub>OL</sub>	-	-	-	0.1VDD	V
Supply Current	I <sub>DD</sub>	VDD=VCI=3.3V Pattern= black*1	-	9	14	mA

Note1: Maximum current display.

## 1.5 Optical Characteristics

### TFT LCD Panel

VDD=VCI=3.3V, Ta=25°C

Item	Symbol	Condition	Min.	Typ.	Max.	unit	-	
Response time	Tr + Tf	Ta = 25°C θX, θY = 0°	-	35	53	ms	Note2	
Viewing angle	Top	θY+	CR ≥ 10	-	60	-	Deg.	Note4
	Bottom	θY-		-	60	-		
	Left	θX-		-	60	-		
	Right	θX+		-	60	-		
Contrast ratio	CR		500	600	-	-	Note3	
Color of CIE Coordinate (With B/L & TP)	White	X	Ta = 25°C θX, θY = 0°	0.26	0.31	0.36	-	Note1
		Y		0.29	0.34	0.41		
	Red	X		0.59	0.64	0.69		
		Y		0.30	0.35	0.40		
	Green	X		0.29	0.34	0.39		
		Y		0.55	0.60	0.65		
	Blue	X		0.09	0.14	0.19		
		Y		0.03	0.08	0.13		
Average Brightness Pattern=white display	IV	IF= 20 mA	260	300		cd/m <sup>2</sup>	Note1	
Uniformity	△B		80	-	-	%	Note1	

Note1:

1 :  $\Delta B = B(\min) / B(\max) \times 100\%$


2 : Measurement Condition for Optical Characteristics:

a : Environment: 25°C ± 5°C / 60 ± 20% R.H, no wind, dark room below 10 Lux at typical lamp current and typical operating frequency.

b : Measurement Distance: 500 ± 50 mm, (θ = 0°)

c : Equipment: TOPCON BM-7 fast, (field 1°), after 10 minutes operation.


d : The uncertainty of the C.I.E coordinate measurement ± 0.01, Average Brightness ± 4%

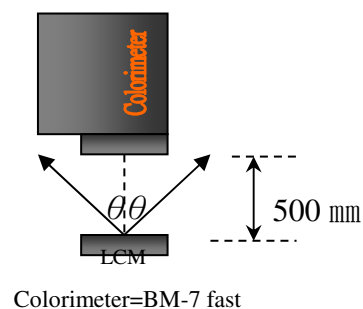

**Note2: Definition of response time:**

The output signals of photo detector are measured when the input signals are changed from "black" to "white"(falling time) and from "white" to "black"(rising time), respectively. The response time is defined as the time interval between the 10% and 90% of Amplitudes.

Refer to figure as below:

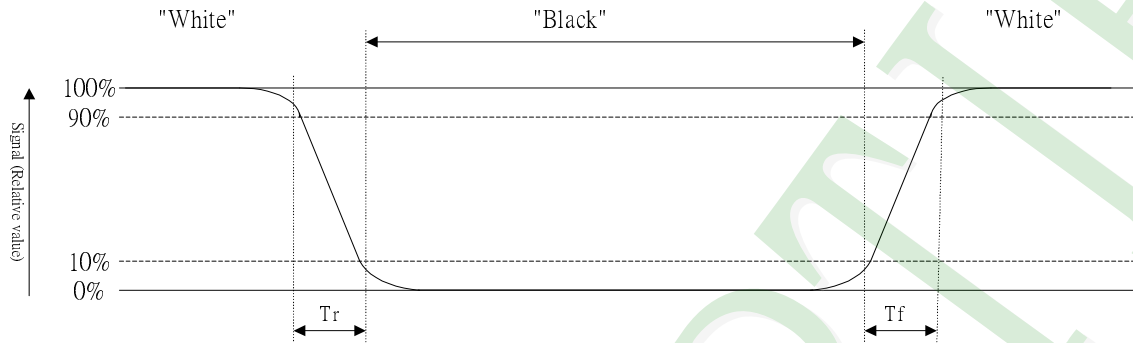


**Note3: Definition of contrast ratio:**

Contrast ratio is calculated with the following formula

$$\text{Contrast ratio (CR)} = \frac{\text{Photo detector output when LCD is at "White" state}}{\text{Photo detector output when LCD is at "Black" state}}$$

**Note4: Definition of viewing angle:**

Refer to figure as below:

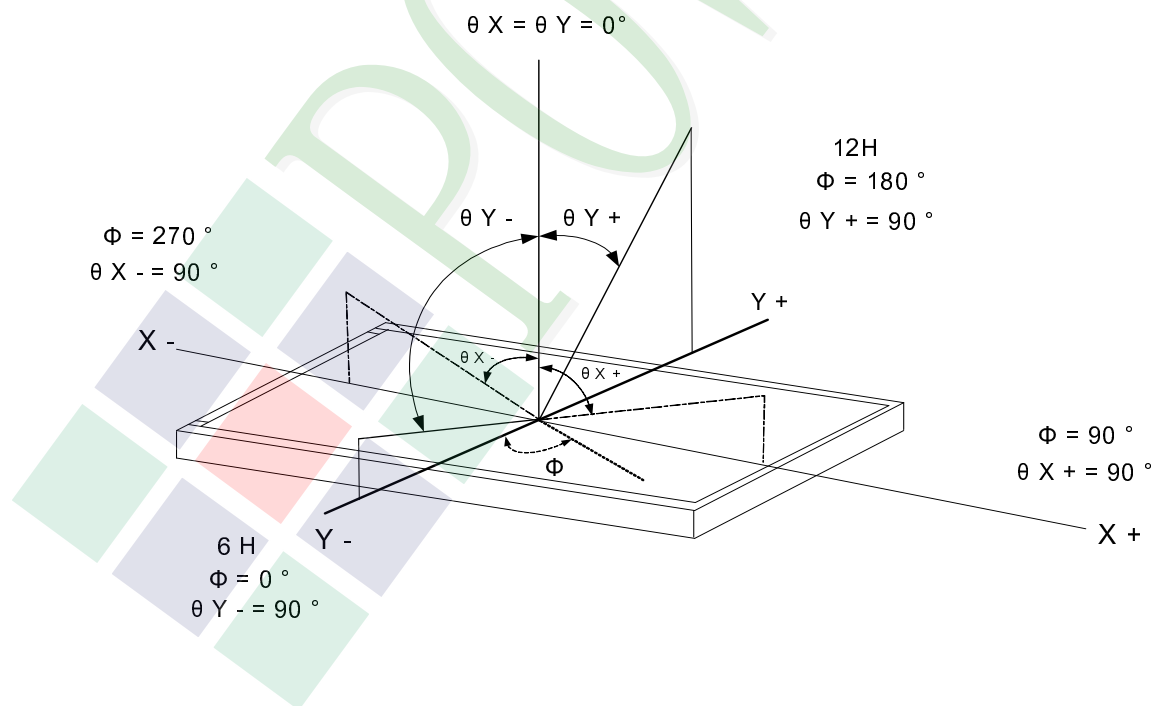

## 1.6 Backlight Characteristics


### Maximum Ratings

Item	Symbol	Conditions	Min.	Max.	Unit
Forward Current	IF	Ta =25°C	-	48	mA
Power Dissipation	PD	Ta =25°C	-	540	mW

### Electrical / Optical Characteristics

Item	Symbol	Conditions	Min.	Typ.	Max.	Unit
Forward Voltage	VF	IF= 20 mA	-	19.2	21	V
Average Brightness (Without LCD & TP)	IV	IF= 20 mA	3800	4500	-	cd/m <sup>2</sup>
Color of CIE Coordinate (Without LCD & TP)	X		0.28	0.30	0.32	-
	Y		0.28	0.30	0.32	
Color	White					

### Internal Circuit Diagram



### Other Description


Item	Conditions	Description
Life Time	Ta =25°C IF= 20mA	20000 hrs



## 1.7 Touch Panel Specification

### 1.7.1 General Standard Specification

Item	Specification
Input Method	Finger or stylus pen
ITO Glass	T=0.7mm , 400Ω/ ±100Ω
ITO Film	T=0.188mm , 400Ω/ ±150Ω Anti
Operating Temperature Range	-20°C~70°C,20~90%RH(Except for dew gathering)
Operating Temperature Range	-30°C~40°C,90%RH↓,41°C~80°C,60%RH↓ (Except for dew gathering)
Surface Hardness	3H-prpressure 500gf,45deg.
Hitting Durability	1,000,000 times min. (Tip R 8 mm & R0.8mm)
Pen Sliding Durability	100,000 times min. (Tip R0.8mm)
Insulation Impedance	DC25V 1min,20MΩ ↑
Light Transparency	78%min
Linearity	Linearity Force 172g ±1.5% (±1.5% After environmental and life test)
Linearity Force	80gf less input with stylus pen (R0.8mm) Activation force guarantee area: 3.0mm inside of Active Area.
Activation Force	120gf(Typical 20gf) less individual point on with stylus pen 9RR0.8mm. Activation force guarantee area: 5.0mm inside of Active Area.
Bouncing	<10ms
Impact Resistance	No damage when φ 9mm steel ball is dropped on the surface from 30 cm height at 1 time.
Flexible Pattern Heat Seal Peeling Strength	500gf/cm(peeling upward by 90deg)
Flexible Pattern Bending Resistance	Bending 3 times by bending radius R1.0 mm. The requirements in 4-2 shall be satisfied
Flexible Pattern Insert/Pull Out Resistance	5 times at least. The requirements in 4-2 shall be satisfied.
Vibration Resistance	Not in operation: The requirements in 3 to 4 shall be satisfied after sweep vibration of 2G 15~55Hz(1 min.) is given for 30 min. each in the directions of X, Y, Z.
Package Drop	No damage to the product.(1corner edge, 2 ridges, 4 surfaces, drop from 50 cm height)
Static load resistance	After 4.5Kg load for 1 min is applied to the center area (25 cm <sup>2</sup> ) of the Touch panel, the requirements in 3 and 4, shall be satisfied.

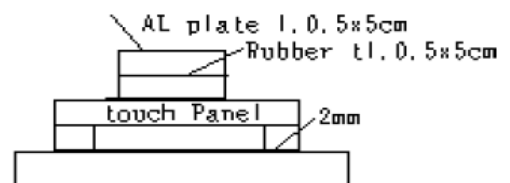

## 1.7.2 Optical Characteristic

1.7.2.1 test by light measure device and the result should be 80%min.

## 1.7.3 Electrical Characteristics

1.7.3.1 Insulation Resistance.

10 MΩ or more (DC 25V 1min)

1.7.3.2 Resistance Between Terminals.

Direction X (Film side): 250Ω~ 850Ω

Direction Y (Glass side): 100Ω~ 600Ω

1.7.3.3 Linearity.

± 1.5% Measuring method,  $\text{Linearity}(\%) = \frac{\Delta V}{EV-SV} \times 100$

± 1.5%(after environmental and life test)

△V: The difference between the ideal voltage and measured voltage on the each measuring line.

SV: Voltage of starting Points

EV: Voltage of Ending Points

1.7.3.4 Operating Voltage.

5V DC.

Max Voltage : 7V DC.

1.7.3.5 Bouncing

<10ms

## 1.7.4 Attention of Mounting Condition

1.7.4.1 The gasket support of touch panel must be designed on the outside of Viewable area, as well as to avoid pressing on touch panel accidentally, the enclosure must be designed with enough clearance to panel surface.



To avoid pressing error on touch panel accidentally, please remain space between the surface of panel and the Bezel.

1.7.4.2 Bezel opening must be between Viewable area and Active area. Bezel opening must not touch Viewable area.

1.7.4.3 We recommend elastic material made support.

1.7.4.4 Do not use adhesive to bond top surface (ITO Film) of touch panel with enclosure.

1.7.4.5 The edge of touch panel is conductive. Don't touch it with metal after mounting.

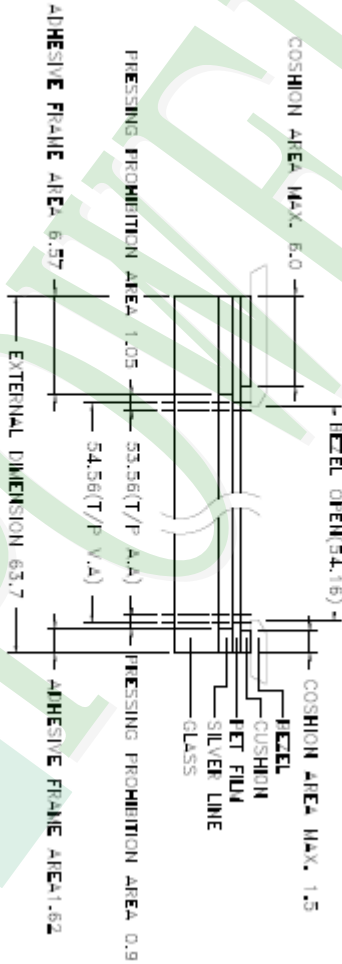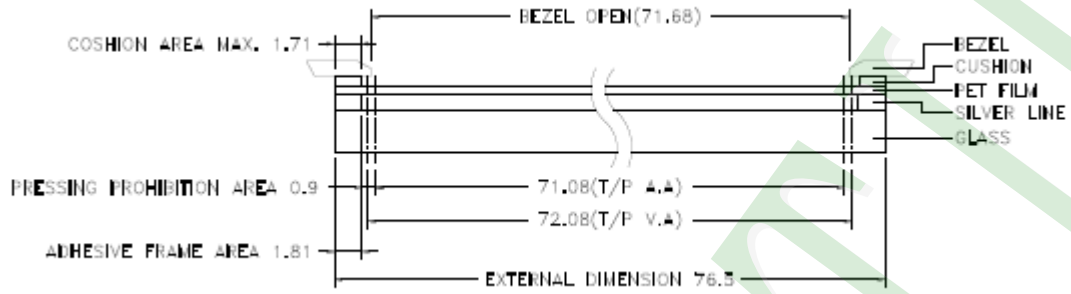


## 2. MODULE STRUCTURE

### 2.1 Counter Drawing

#### 2.1.1 LCM Mechanical Diagram

\* See Appendix

#### 2.1.2 Block Diagram

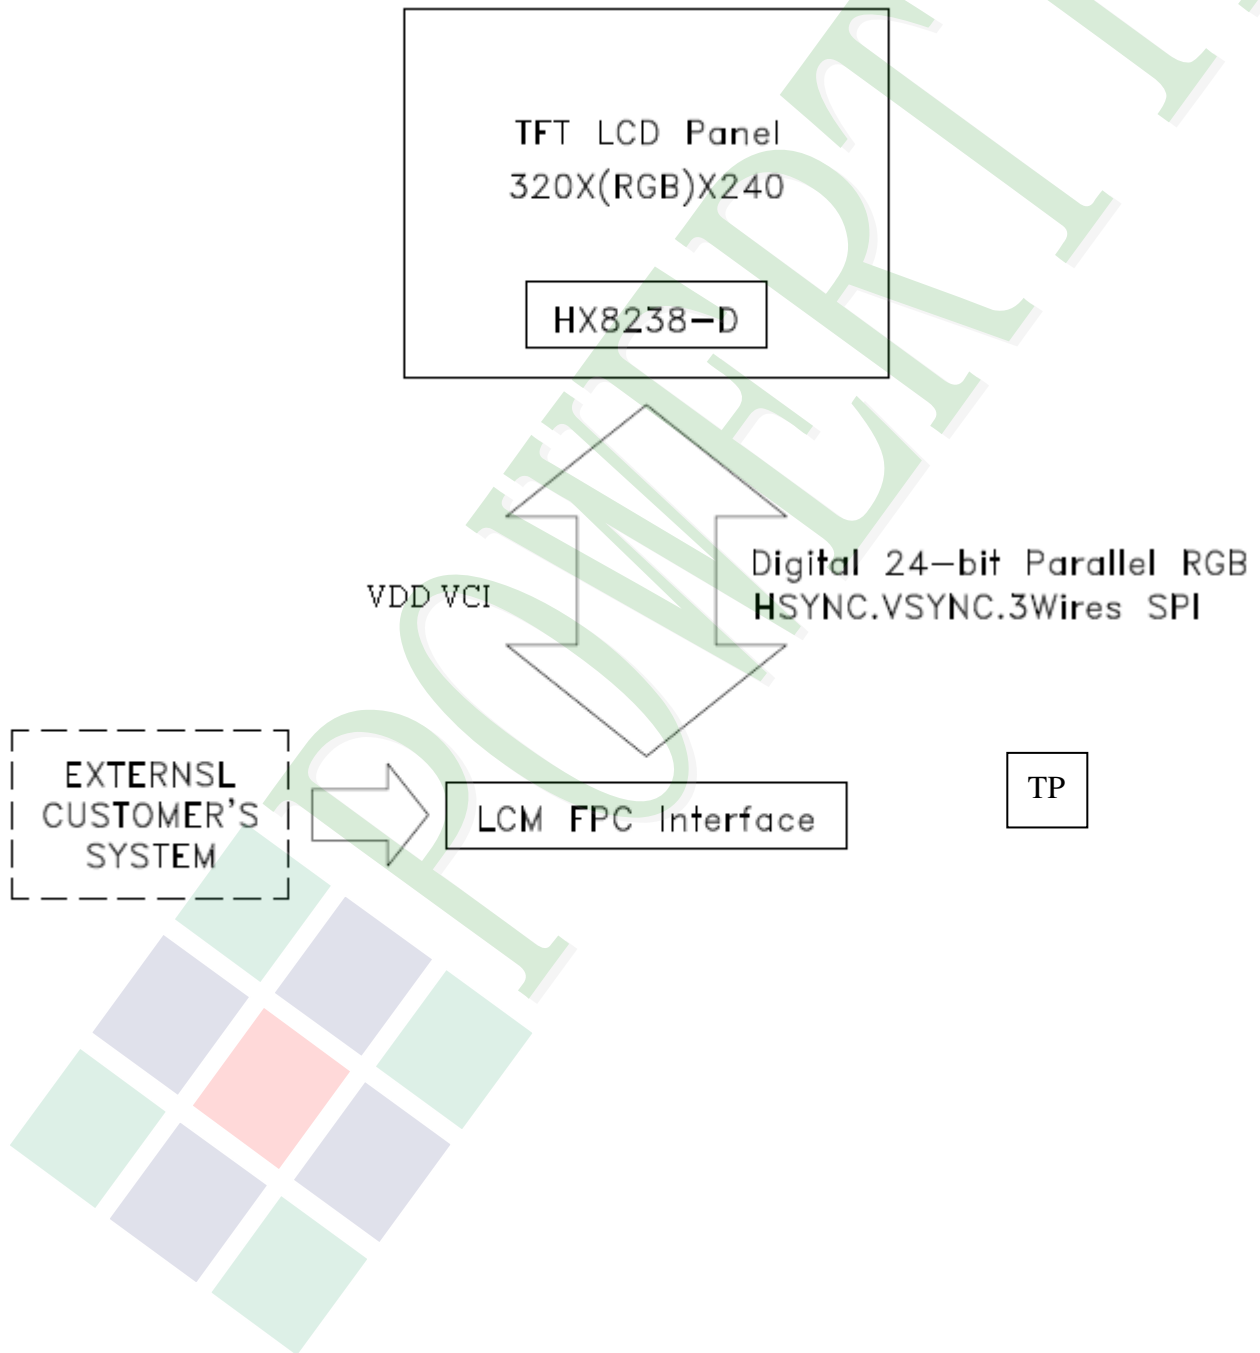

## 2.2 Interface Pin Description


Pin No.	Symbol	Function
1	A	LED Anode.
2	K	LED Cathode.
3	GND	Ground.
4	VCI	Booster Reference Supply Voltage.
5	ID	Note1.
6	VDD	Power Supply Voltage.
7	GND	Ground.
8	RESB	Reset.
9	CSB	Chip select Input: CSB = L - selected and accessible. CSB = H - is not selected and not accessible.
10	SCK	SPI Clock Input.
11	SDO	SPI Data Output. The data is valid on the falling edge of the SCK signal.
12	SDI	SPI Data Input. The data is latched on the rising edge of the SCK signal.
13	GND	Ground.
14	B0	Graphic display Blue data.
15	B1	
16	B2	
17	B3	
18	B4	
19	B5	
20	B6	

Pin No.	Symbol	Function
21	B7	Graphic display Blue data.
22	G0	Graphic display Green data.
23	G1	
24	G2	
25	G3	
26	G4	
27	G5	
28	G6	
29	G7	
30	R0	Graphic display Red data.
31	R1	
32	R2	
33	R3	
34	R4	
35	R5	
36	R6	
37	R7	
38	GND	Ground.
39	DCLK	Video Clock Input. The data is latched on the rising edge of DCLK.
40	HSYNC	Horizontal Sync Input.
41	VSYNC	Vertical Sync Input.

Pin No.	Symbol	Function
42	DEN	Video Data Enable Input. VSYNC+HSYNC mode - This pin is shorted to GND normally and the back/front porch is determined by the control register. VSYNC+HSYNC+DE mode - The valid data is determined by the VSYNC+HSYNC+DEN pin. DE mode - VSYNC and HSYNC are unused and shorted to GND. The valid input. data is determined by DEN pin.
43	GND	Ground.
44	SEL0	Note2.
45	SEL1	
46	SEL2	
47	Y+	Touch Panel Y_Top.
48	X+	Touch Panel X_Right.
49	Y-	Touch Panel Y_Bottom.
50	X-	Touch Panel X_Left.

### Note1: ID code Circuit

Vendor ID (On FPC, ID resistor as specified in vendor table shall be connected to this pin, and other side of the resistor shall be connected to GND)

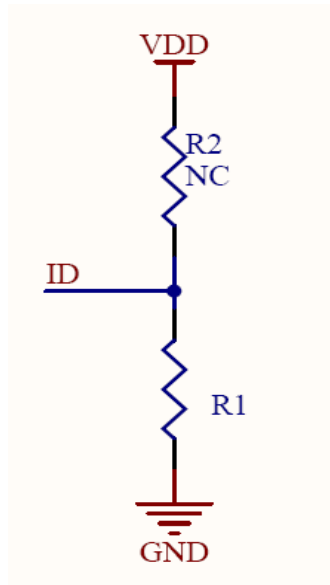

**R1=44.2KΩ**

### Note2: Define the input interface mode

SEL2	SEL1	SEL0	Format	Operating frequency
0	0	0	Parallel-RGB data format (only support stripe type color filter)	6.5MHz
0	0	1	Serial-RGB data format	19.5MHz
0	1	0	CCIR 656 data format (640RGB)	24.54MHz
0	1	1	CCIR 656 data format (720RGB)	27MHz
1	0	0	YUV mode A data format (Cr-Y-Cb-Y)	24.54MHz
1	0	1	YUV mode A data format (Cr-Y-Cb-Y)	27MHz
1	1	0	YUV mode B data format (Cb-Y-Cr-Y)	27MHz
1	1	1	YUV mode B data format (Cb-Y-Cr-Y)	24.54MHz

Input format	DOTCLK Freq (MHz)	Display data	Active area (DOTCLK)
YUV mode	24.54	640	1280
	27	720	1440



### 2.2.1 Refer Initial code:

```
//Initial-----  
\void Initial_Main(void)                // For HX8238-D  
{  
  
MOV    DPH,#00H                        ;Register 0001  
MOV    DPL,#01H  
CALL   COM_SER  
MOV    DPH,#63H  
MOV    DPL,#00H  
CALL   DATA_SER  
  
MOV    DPH,#00H                        ;Register 0002  
MOV    DPL,#02H  
CALL   COM_SER  
MOV    DPH,#02H  
MOV    DPL,#00H  
CALL   DATA_SER  
  
MOV    DPH,#00H                        ;Register 0003  
MOV    DPL,#03H  
CALL   COM_SER  
MOV    DPH,#01100100B                  ;DB3 ~ DB0  
MOV    DPL,#01100100B  
CALL   DATA_SER
```

MOV DPH,#00H ;Register 0004

MOV DPL,#04H

CALL COM\_SER

MOV DPH,#04H

MOV DPL,#C7H ;Parallel 24 bits

CALL DATA\_SER

MOV DPH,#00H ;Register 0005

MOV DPL,#05H

CALL COM\_SER

MOV DPH,#FCH

MOV DPL,#80H

CALL DATA\_SER

MOV DPH,#00H ;Register 000A

MOV DPL,#0AH

CALL COM\_SER

MOV DPH,#40H

MOV DPL,#08H

CALL DATA\_SER

MOV DPH,#00H ;Register 000D

MOV DPL,#0DH

CALL COM\_SER

MOV DPH,#00000010B

MOV DPL,#00110001B ;DB5 ~ DB0 VLCD63

CALL DATA\_SER

MOV DPH,#00H ;Register 000E

MOV DPL,#0EH

CALL COM\_SER

MOV DPH,#00101110B ;DB4 ~ DB0 VCOM


MOV DPL,#10000000B ;DB7 ~ DB6

CALL DATA\_SER

CALL DELAY2

}

## 2.3 Timing Characteristics

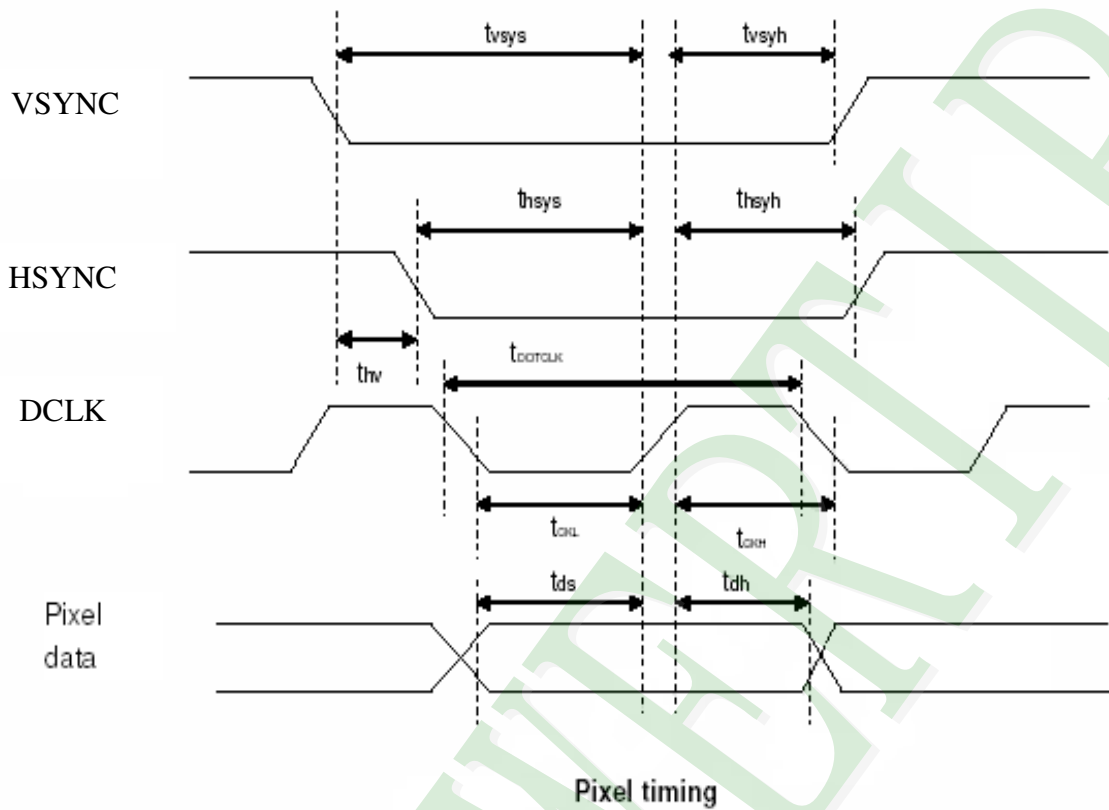


Characteristics	Symbol	Min		Typ		Max		Unit
		24 bit	8 bit	24 bit	8 bit	24 bit	8 bit	
DOTCLK Frequency	fDOTCLK	-	-	6.5	19.5	10	30	MHz
DOTCLK Period	tDOTCLK	100	33.3	154	51.3	-	-	ns
Vertical Sync Setup Time	$t_{vsys}$	20	10	-	-	-	-	ns
Vertical Sync Hold Time	$t_{vsyh}$	20	10	-	-	-	-	ns
Horizontal Sync Setup Time	$t_{hsys}$	20	10	-	-	-	-	ns
Horizontal Sync Hold Time	$t_{hsyh}$	20	10	-	-	-	-	ns
Phase difference of Sync Signal Falling Edge	$t_{thv}$	1		-		240		tDOTCLK
DOTCLK Low Period	tCKL	50	15	-	-	-	-	ns
DOTCLK High Period	tCKH	50	15	-	-	-	-	ns
Data Setup Time	$t_{ds}$	12	10	-	-	-	-	ns
Data hold Time	$t_{dh}$	12	10	-	-	-	-	ns
Reset pulse width	tRES	10		-		-		us


Note: External clock source must be provided to DOTCLK pin of HX8238-A. The driver will not operate if absent of the clocking signal.

### Pixel timing

Note : The interface of this module can drive by digital 24-bit data.

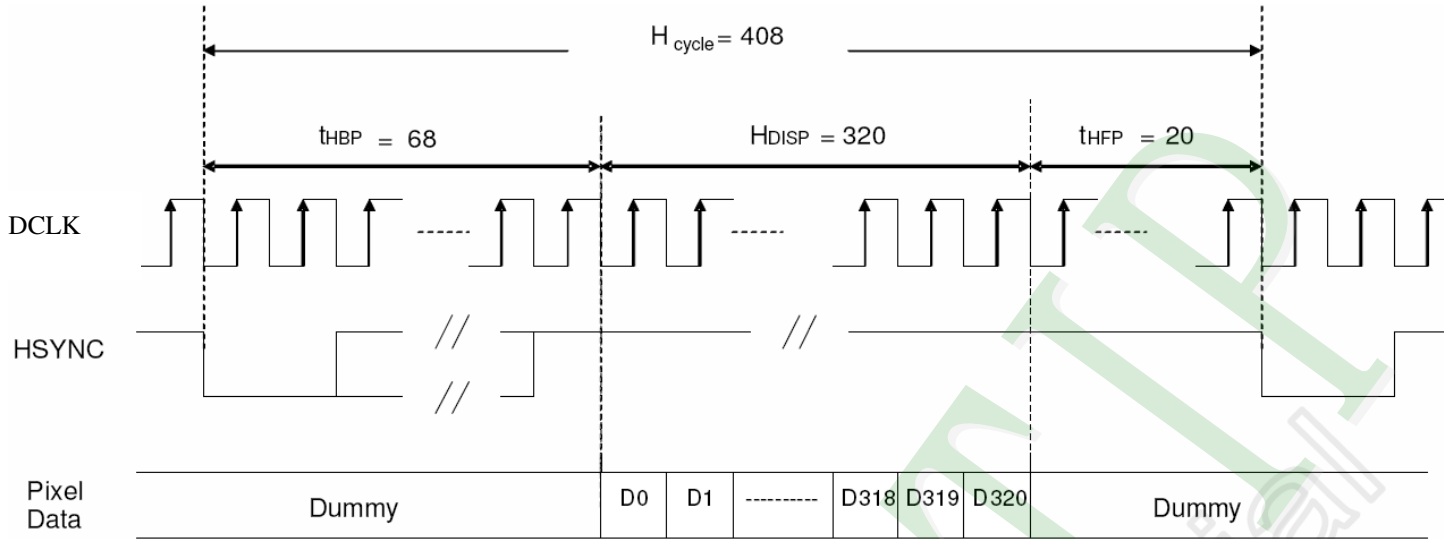


a) Horizontal Data Transaction Timing

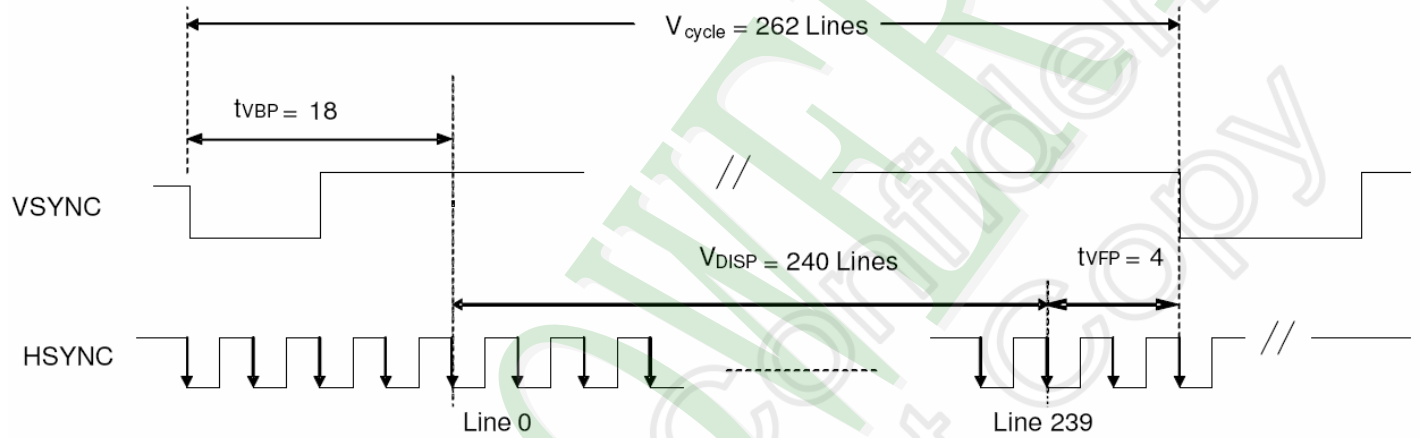

b) Vertical Data Transaction Timing

Data transaction timing in parallel RGB(24 bit)interface (SYNC mode)

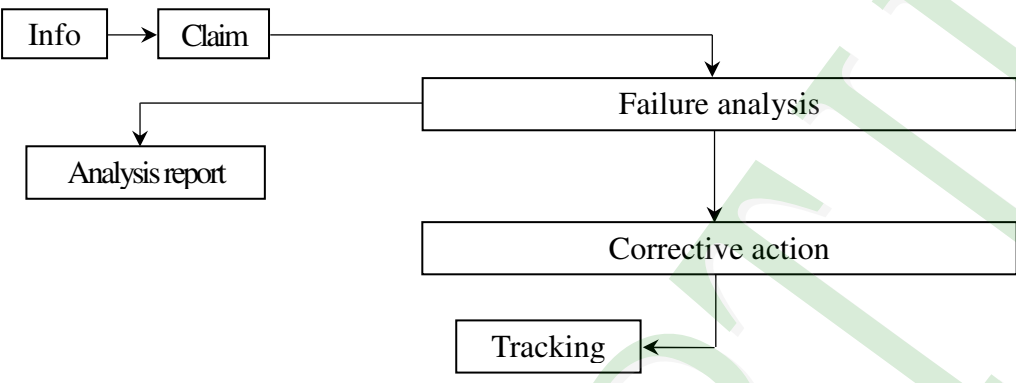


Item	Customer	Sales	R&D	Q.A	Manufacturing	Product control	Purchase	Inventory control
Sales Service	 <pre> graph TD     Info[Info] --&gt; Claim[Claim]     Claim --&gt; Failure[Failure analysis]     Failure --&gt; Report[Analysis report]     Failure --&gt; Action[Corrective action]     Action --&gt; Tracking[Tracking]           </pre>							
Q.A Activity	1. ISO 9001 Maintenance Activities 3. Equipment calibration 5. Standardization Management				2. Process improvement proposal 4. Education And Training Activities			

### 3.2. Inspection Specification


- ◆Scope : The document shall be applied to TFT-LCD Module for 3.5" ~10" (Ver.B01).
- ◆Inspection Standard : MIL-STD-105E Table Normal Inspection Single Sampling Level II.
- ◆Equipment : Gauge 、 MIL-STD 、 Powertip Tester 、 Sample
- ◆Defect Level : Major Defect AQL : 0.4 ; Minor Defect AQL : 1.5
- ◆OUT Going Defect Level : Sampling.
- ◆Standard of the product appearance test :

a. Manner of appearance test :

- (1). The test best be under 20W×2 fluorescent light , and distance of view must be at 30 cm.
- (2). The test direction is base on about around 45° of vertical line.

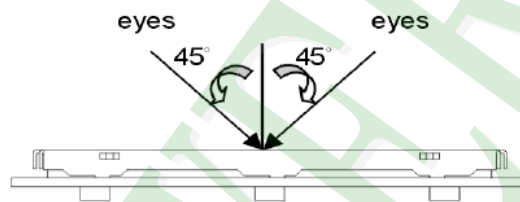

(3). Definition of area.

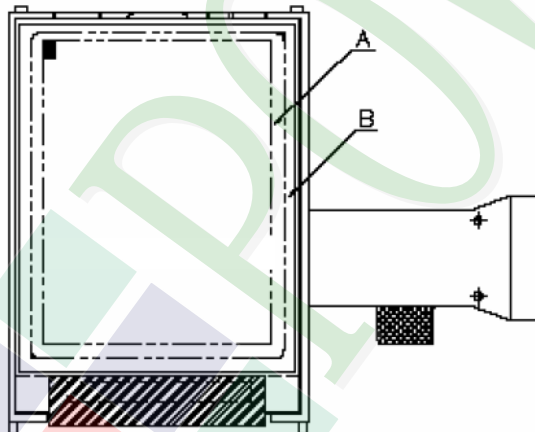

*A* area : viewing area

*B* area : Outside of viewing area

(4). Standard of inspection : (Unit : mm)





◆Specification For TFT-LCD Module 3, 5" ~10" :

(Ver.B01)

NO	Item	Criterion	Level										
01	Product condition	1. 1 The part number is inconsistent with work order of production.	Major										
		1. 2 Mixed product types.	Major										
		1. 3 Assembled in inverse direction.	Major										
02	Quantity	2. 1 The quantity is inconsistent with work order of production.	Major										
03	Outline dimension	3. 1 Product dimension and structure must conform to structure diagram.	Major										
04	Electrical Testing	4. 1 Missing line character and icon.	Major										
		4. 2 No function or no display.	Major										
		4. 3 Display malfunction.	Major										
		4. 4 LCD viewing angle defect.	Major										
		4. 5 Current consumption exceeds product specifications.	Major										
05	Dot defect (Bright dot 、 Dark dot)  On -display	<table border="1"> <thead> <tr> <th>Item</th> <th>Acceptance (Q'ty)</th> </tr> </thead> <tbody> <tr> <td>Bright Dot</td> <td><math>\leq 4</math></td> </tr> <tr> <td>Dark Dot</td> <td><math>\leq 5</math></td> </tr> <tr> <td>Joint Dot</td> <td><math>\leq 3</math></td> </tr> <tr> <td>Total</td> <td><math>\leq 7</math></td> </tr> </tbody> </table>	Item	Acceptance (Q'ty)	Bright Dot	$\leq 4$	Dark Dot	$\leq 5$	Joint Dot	$\leq 3$	Total	$\leq 7$	Minor
		Item	Acceptance (Q'ty)										
		Bright Dot	$\leq 4$										
		Dark Dot	$\leq 5$										
		Joint Dot	$\leq 3$										
Total	$\leq 7$												
5. 1 Inspection pattern : full white , full black , Red , Green and blue screens.													
5. 2 It is defined as dot defect if defect area $> 1/2$ dot.													
5. 3 The distance between two dot defect $\geq 5$ mm.													


◆ Specification For TFT-LCD Module 3.5" ~10" :

(Ver.B01)

NO	Item	Criterion	Level																																									
06	<p>Black or white dot、scratch、contamination</p> <p>Round type</p>  <p><math>\Phi = (x + y) / 2</math></p> <p>Line type</p> 	<p>6.1 Round type ( Non-display or display ) :</p> <table border="1" data-bbox="544 434 1302 842"> <thead> <tr> <th rowspan="2">Dimension (diameter : <math>\Phi</math>)</th> <th colspan="2">Acceptance (Q'ty)</th> </tr> <tr> <th>A area</th> <th>B area</th> </tr> </thead> <tbody> <tr> <td><math>\Phi \leq 0.25</math></td> <td colspan="2">Ignore</td> </tr> <tr> <td><math>0.25 &lt; \Phi \leq 0.50</math></td> <td>5</td> <td rowspan="2">Ignore</td> </tr> <tr> <td><math>\Phi &gt; 0.50</math></td> <td>0</td> </tr> <tr> <td><b>Total</b></td> <td colspan="2">5</td> </tr> </tbody> </table> <p>6.2 Line type( Non-display or display ) :</p> <table border="1" data-bbox="517 958 1331 1415"> <thead> <tr> <th rowspan="2">Length (L)</th> <th rowspan="2">Width (W)</th> <th colspan="2">Acceptance (Q'ty)</th> </tr> <tr> <th>A area</th> <th>B area</th> </tr> </thead> <tbody> <tr> <td>---</td> <td><math>W \leq 0.03</math></td> <td colspan="2">Ignore</td> </tr> <tr> <td><math>L \leq 10.0</math></td> <td><math>0.03 &lt; W \leq 0.05</math></td> <td>4</td> <td rowspan="2">Ignore</td> </tr> <tr> <td><math>L \leq 5.0</math></td> <td><math>0.05 &lt; W \leq 0.10</math></td> <td>2</td> </tr> <tr> <td>---</td> <td><math>W &gt; 0.10</math></td> <td colspan="2">As round type</td> </tr> <tr> <td colspan="2"><b>Total</b></td> <td colspan="2">5</td> </tr> </tbody> </table>	Dimension (diameter : $\Phi$ )	Acceptance (Q'ty)		A area	B area	$\Phi \leq 0.25$	Ignore		$0.25 < \Phi \leq 0.50$	5	Ignore	$\Phi > 0.50$	0	<b>Total</b>	5		Length (L)	Width (W)	Acceptance (Q'ty)		A area	B area	---	$W \leq 0.03$	Ignore		$L \leq 10.0$	$0.03 < W \leq 0.05$	4	Ignore	$L \leq 5.0$	$0.05 < W \leq 0.10$	2	---	$W > 0.10$	As round type		<b>Total</b>		5		Minor
Dimension (diameter : $\Phi$ )	Acceptance (Q'ty)																																											
	A area	B area																																										
$\Phi \leq 0.25$	Ignore																																											
$0.25 < \Phi \leq 0.50$	5	Ignore																																										
$\Phi > 0.50$	0																																											
<b>Total</b>	5																																											
Length (L)	Width (W)	Acceptance (Q'ty)																																										
		A area	B area																																									
---	$W \leq 0.03$	Ignore																																										
$L \leq 10.0$	$0.03 < W \leq 0.05$	4	Ignore																																									
$L \leq 5.0$	$0.05 < W \leq 0.10$	2																																										
---	$W > 0.10$	As round type																																										
<b>Total</b>		5																																										
07	Polarizer Bubble	<table border="1" data-bbox="509 1480 1339 1895"> <thead> <tr> <th rowspan="2">Dimension (diameter : <math>\Phi</math>)</th> <th colspan="2">Acceptance (Q'ty)</th> </tr> <tr> <th>A area</th> <th>B area</th> </tr> </thead> <tbody> <tr> <td><math>\Phi \leq 0.25</math></td> <td colspan="2">Ignore</td> </tr> <tr> <td><math>0.25 &lt; \Phi \leq 0.50</math></td> <td>4</td> <td rowspan="2">Ignore</td> </tr> <tr> <td><math>0.50 &lt; \Phi \leq 0.80</math></td> <td>1</td> </tr> <tr> <td><math>\Phi &gt; 0.80</math></td> <td colspan="2">0</td> </tr> <tr> <td><b>Total</b></td> <td colspan="2">5</td> </tr> </tbody> </table>	Dimension (diameter : $\Phi$ )	Acceptance (Q'ty)		A area	B area	$\Phi \leq 0.25$	Ignore		$0.25 < \Phi \leq 0.50$	4	Ignore	$0.50 < \Phi \leq 0.80$	1	$\Phi > 0.80$	0		<b>Total</b>	5		Minor																						
Dimension (diameter : $\Phi$ )	Acceptance (Q'ty)																																											
	A area	B area																																										
$\Phi \leq 0.25$	Ignore																																											
$0.25 < \Phi \leq 0.50$	4	Ignore																																										
$0.50 < \Phi \leq 0.80$	1																																											
$\Phi > 0.80$	0																																											
<b>Total</b>	5																																											



◆Specification For TFT-LCD Module 3.5" ~10" :

(Ver.B01)

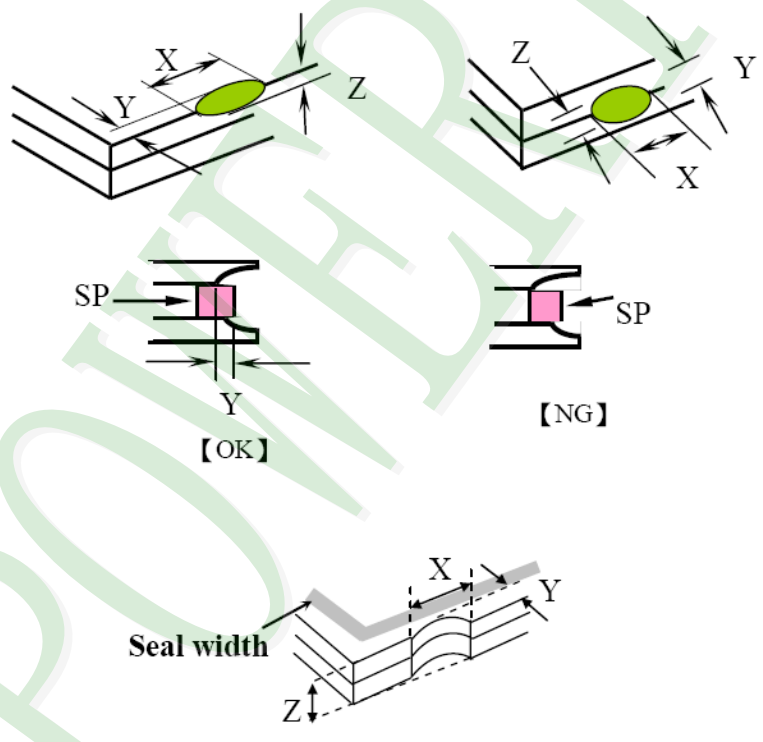NO	Item	Criterion	Level						
08	The crack of glass	<p><b>Symbols :</b></p> <p><b>X :</b> The length of crack  <b>Z :</b> The thickness of crack  <b>t :</b> The thickness of glass</p> <p><b>Y :</b> The width of crack.  <b>W :</b> terminal length  <b>a :</b> LCD side length</p>	Minor						
		<p>8.1 General glass chip :</p> <p>8.1.1 Chip on panel surface and crack between panels:</p>  <table border="1" data-bbox="542 1568 1340 1859"> <thead> <tr> <th>X</th> <th>Y</th> <th>Z</th> </tr> </thead> <tbody> <tr> <td><math>\leq a</math></td> <td>Crack can't enter viewing area</td> <td><math>\leq 1/2 t</math></td> </tr> <tr> <td><math>\leq a</math></td> <td>Crack can't exceed the half of SP width.</td> <td><math>1/2 t &lt; Z \leq 2 t</math></td> </tr> </tbody> </table>		X	Y	Z	$\leq a$	Crack can't enter viewing area	$\leq 1/2 t$
X	Y	Z							
$\leq a$	Crack can't enter viewing area	$\leq 1/2 t$							
$\leq a$	Crack can't exceed the half of SP width.	$1/2 t < Z \leq 2 t$							



◆ Specification For TFT-LCD Module 3.5" ~10" :

(Ver.B01)

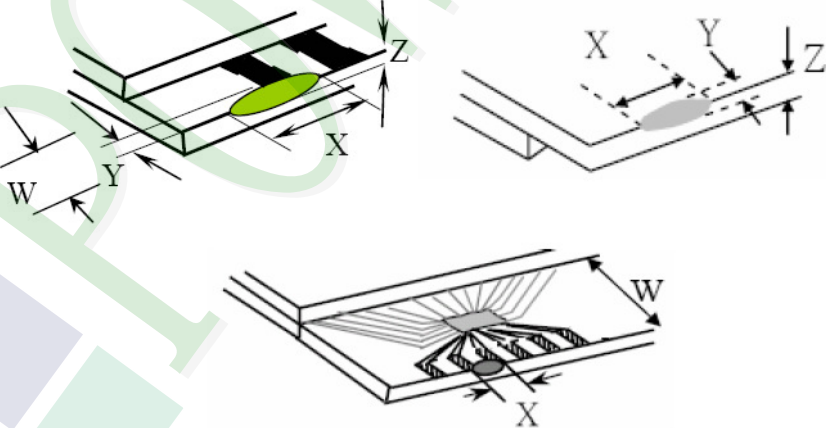NO	Item	Criterion	Level												
08	The crack of glass	<p><b>Symbols :</b></p> <p><b>X :</b> The length of crack  <b>Z :</b> The thickness of crack  <b>t :</b> The thickness of glass</p> <p><b>Y :</b> The width of crack.  <b>W :</b> terminal length  <b>a :</b> LCD side length</p> <hr/> <p>8.1.2 Corner crack :</p>  <table border="1" data-bbox="525 770 1334 1059"> <thead> <tr> <th>X</th> <th>Y</th> <th>Z</th> </tr> </thead> <tbody> <tr> <td><math>\leq 1/5 a</math></td> <td>Crack can't enter viewing area</td> <td><math>Z \leq 1/2 t</math></td> </tr> <tr> <td><math>\leq 1/5 a</math></td> <td>Crack can't exceed the half of SP width.</td> <td><math>1/2 t &lt; Z \leq 2 t</math></td> </tr> </tbody> </table>	X	Y	Z	$\leq 1/5 a$	Crack can't enter viewing area	$Z \leq 1/2 t$	$\leq 1/5 a$	Crack can't exceed the half of SP width.	$1/2 t < Z \leq 2 t$				
		X	Y	Z											
$\leq 1/5 a$	Crack can't enter viewing area	$Z \leq 1/2 t$													
$\leq 1/5 a$	Crack can't exceed the half of SP width.	$1/2 t < Z \leq 2 t$													
		<p>8.2 Protrusion over terminal :</p> <p>8.2.1 Chip on electrode pad :</p>  <table border="1" data-bbox="563 1688 1342 1861"> <thead> <tr> <th></th> <th>X</th> <th>Y</th> <th>Z</th> </tr> </thead> <tbody> <tr> <td>Front</td> <td><math>\leq a</math></td> <td><math>\leq 1/2 W</math></td> <td><math>\leq t</math></td> </tr> <tr> <td>Back</td> <td><math>\leq a</math></td> <td><math>\leq W</math></td> <td><math>\leq 1/2 t</math></td> </tr> </tbody> </table>		X	Y	Z	Front	$\leq a$	$\leq 1/2 W$	$\leq t$	Back	$\leq a$	$\leq W$	$\leq 1/2 t$	Minor
	X	Y	Z												
Front	$\leq a$	$\leq 1/2 W$	$\leq t$												
Back	$\leq a$	$\leq W$	$\leq 1/2 t$												

◆ Specification For TFT-LCD Module 3.5" ~10" :

(Ver.B01)

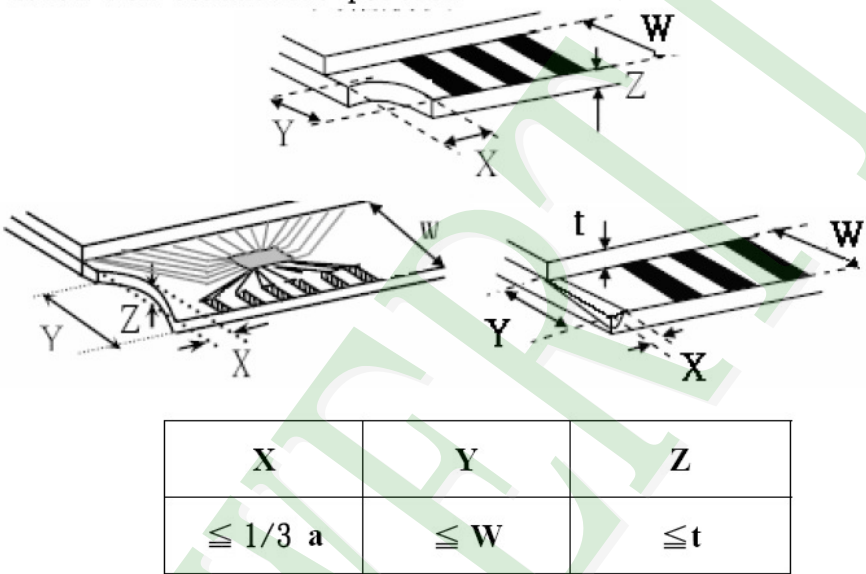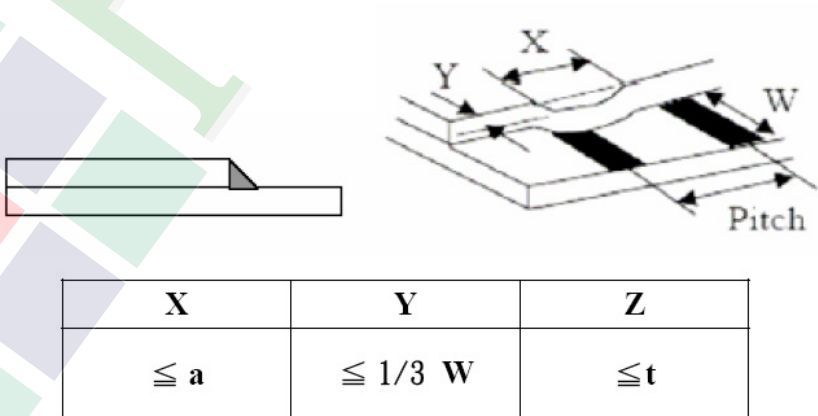NO	Item	Criterion	Level
08	The crack of glass	<p>Symbols :</p> <p>X : The length of crack                      Y : The width of crack.            Z : The thickness of crack                W : terminal length            t : The thickness of glass                 a : LCD side length</p>	Minor
		<p>8.2.2 Non-conductive portion :</p>  <p>⊙ If the chipped area touches the ITO terminal, over 2/3 of the ITO must remain and be inspected according to electrode terminal specifications.</p> <p>8.2.3 Glass remain :</p> 	

◆ Specification For TFT-LCD Module 3.5" ~10" :

(Ver.B01)

NO	Item	Criterion	Level
09	Backlight elements	9. 1 Backlight can't work normally.	Major
		9. 2 Backlight doesn't light or color is wrong.	Major
		9. 3 Illumination source flickers when lit.	Major
10	General appearance	10. 1 Pin type 、 quantity 、 dimension must match type in structure diagram.	Major
		10. 2 No short circuits in components on PCB or FPC .	Major
		10. 3 Parts on PCB or FPC must be the same as on the production characteristic chart .There should be no wrong parts , missing parts or excess parts.	Major
		10. 4 Product packaging must the same as specified on packaging specification sheet.	Minor
		10. 5 The folding and peeled off in polarizer are not acceptable.	Minor
		10. 6 The PCB or FPC between B/L assembled distance(PCB or FPC ) is $\leq 1.5$ mm.	Minor





## 5. PRECAUTION RELATING PRODUCT HANDLING

### 5.1 SAFETY

- 5.1.1 If the LCD panel breaks , be careful not to get the liquid crystal to touch your skin.
- 5.1.2 If the liquid crystal touches your skin or clothes , please wash it off immediately by using soap and water.

### 5.2 HANDLING

- 5.2.1 Avoid any strong mechanical shock which can break the glass.
- 5.2.2 Avoid static electricity which can damage the CMOS LSI—When working with the module , be sure to ground your body and any electrical equipment you may be using.
- 5.2.3 Do not remove the panel or frame from the module.
- 5.2.4 The polarizing plate of the display is very fragile. So , please handle it very carefully, do not touch , push or rub the exposed polarizing with anything harder than an HB pencil lead (glass , tweezers , etc.)
- 5.2.5 Do not wipe the polarizing plate with a dry cloth , as it may easily scratch the surface of plate.
- 5.2.6 Do not touch the display area with bare hands , this will stain the display area.
- 5.2.7 Do not use ketonics solvent & aromatic solvent. Use with a soft cloth soaked with a cleaning naphtha solvent.
- 5.2.8 To control temperature and time of soldering is  $320 \pm 10^{\circ}\text{C}$  and 3-5 sec.
- 5.2.9 To avoid liquid (include organic solvent) stained on LCM

### 5.3 STORAGE



- 5.3.1 Store the panel or module in a dark place where the temperature is  $25^{\circ}\text{C} \pm 5^{\circ}\text{C}$  and the humidity is below 65% RH.
- 5.3.2 Do not place the module near organics solvents or corrosive gases.
- 5.3.3 Do not crush , shake , or jolt the module.

### 5.4 TERMS OF WARRANTY

- 5.4.1 Applicable warrant period  
The period is within thirteen months since the date of shipping out under normal using and storage conditions.
- 5.4.2 Unaccepted responsibility  
This product has been manufactured to your company's specification as a part for use in your company's general electronic products. It is guaranteed to perform according to delivery specifications. For any other use apart from general electronic equipment, we cannot take responsibility if the product is used in nuclear power control equipment, aerospace equipment , fire and security systems or any other applications in which there is a direct risk to human life and where extremely high levels of reliability are required.



A B C D E F G H

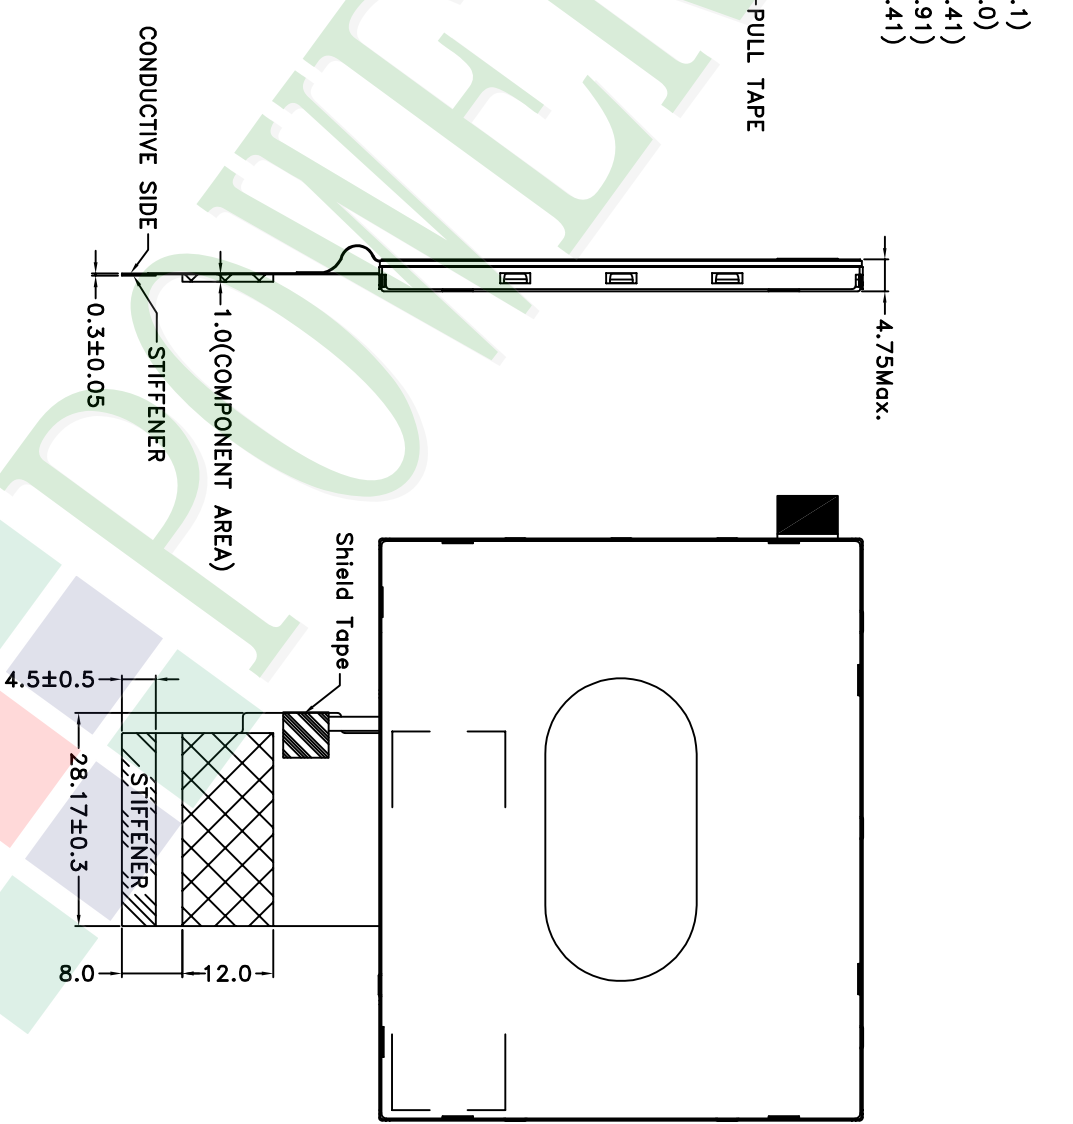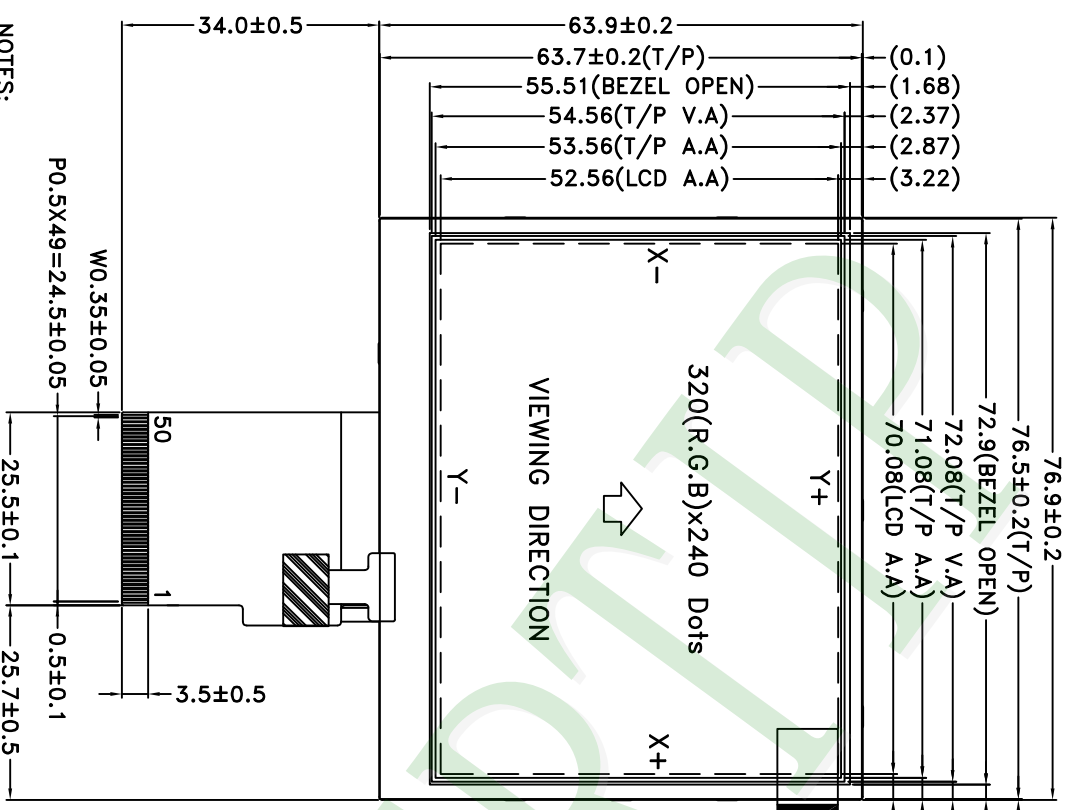

NOTES:

- LCD TYPE: a-SI TFT
- LCD DISPLAY: POSITIVE / TRANSMISSIVE
- The tolerance unless classified  $\pm 0.2\text{mm}$
- FPC Matching Connector: Kyocera 08 6282 050 340 829+ or EQUIVALENT

007					
006					
005					
004					
003	MODIFY NOTE	Stone	2014/03/31		
002	ADD T/P MARKED	Stone	2012/12/17		
001	NEW DRAWING	Stone	2012/12/07		
REV		REV BY		REVISER	DATE

PART NO:		PH320240T-023-103Q	
DRAWING NAME:		LMD-PH320240T-023-103Q	
TITLE:		LCD MODULE DRAWING	

Design		Stone		Surface		Precision Level	
Check		Sam		Material		1 ~ 4	
Approve		Oliver		Thickness		4 ~ 16	
				Scale		16 ~ 63	
				Page		63 ~ 250	
				Quantity		250 ~ 1000	

久正光電股份有限公司  
POWER TIP TECHNOLOGY CORPORATION

Unit		MM		Surface		Precision Level	
Scale		FIT		Material		1 ~ 4	
Page		1/2		Thickness		4 ~ 16	
				Scale		16 ~ 63	
				Page		63 ~ 250	
				Quantity		250 ~ 1000	

# LCM包裝規格書

## LCM Packaging Specifications

(For Tray)

Approve	Check	Contact
Oliver	Sam	Stone

Documents NO. PKG-PH320240T-023-I03Q

## 1. 包裝材料規格表 (Packaging Material) : (per carton)

No.	Item	Model	Dimensions (mm)	1Pcs Weight	Quantity	Total Weight
1	成品 (LCM)	PH320240T-023-I03Q	76.9 X 63.9	0.0408	252	10.2816
2	多層薄膜(1)POF	OTFILM0BA03ABA	19"X350X0.015	—	6	—
3	TRAY 盤 (2)Tray	TYPH32024002BB	352 X 260 X 12.8	0.0999	48	4.7952
4	內盒(3)Product Box	BX36627063ABBA	393 X 274 X 68	0.2692	6	1.6152
5	保利龍板(4)Polylon board	OTPLB00PL08ABA	550 X 393 X 20	0.0284	2	0.0568
6	外紙箱(5)Carton	BX57041027CCBA	570 X 410 X 265	1.4208	1	1.4208
7						
8						
9						

2. 一整箱總重量 (Total LCD Weight in carton) : 18.17 Kg±10%

3. 單箱數量規格表 (Packaging Specifications and Quantity) :

(1) LCM quantity per box : no per tray	6	x no of tray	7	=	42
(2) Total LCM quantity in carton : quantity per box	42	x no of boxes	6	=	252

Use empty tray  
空盤

Put products into the tray


Tray stacking

(1)多層薄膜  
POF(2)TRAY 盤  
Tray(3)內盒  
Product Box(4)保利龍板  
Polylon board(5)外紙箱  
Carton

## 特 記 事 項 (REMARK)

## 4. Label Specifications :

TYPE			
ID.NO		S/O	
Q'TY	Pcs	Date	
Lot.NO			
Note			

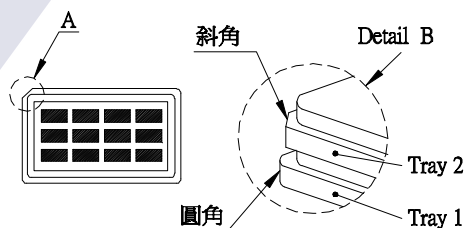

5. TRAY盤相疊時, 需旋轉180度, 請詳見B視圖  
Rotate tray 180 degrees and place on top of stack.  
Check the tray stack using Fig. B.

參照"成品包裝點檢作業標準書"內容