



## SPECIFICATION

---



TM070JVHG33

7.0" – 1280 x 800 – LVDS

Version: 2.2

Date: 15.07.2020

Note: This specification is subject to change without prior notice

**MODEL NO :** TM070JVHG33  
**MODEL VERSION:** 01  
**SPEC VERSION :** 2.2  
**ISSUED DATE:** 2020-07-15

- Preliminary Specification  
 Final Product Specification

Customer :

Approved by	Note <input type="checkbox"/>

TIANMA Confirmed :

Prepared by	Checked by	Approved by
Louis Young	Feng Tan	Kevin Kim

This technical specification is subjected to change without notice.

The information contained herein is the exclusive property of TIANMA MICRO-ELECTRONICS Corporation, and shall not be distributed, reproduced, or disclosed in whole or in part without prior written permission of TIANMA MICRO-ELECTRONICS Corporation.

# Table of Contents

--Coversheet.....	1
Record of Revision .....	3
1 General Specification.....	4
2. Input/output Terminals .....	5
3. Absolute Maximum Ratings .....	6
4 Electrical Characteristics .....	7
5. Timing Chart.....	9
6. Optical Characteristics.....	13
7. Reliability Test.....	16
8. Mechanical Drawing.....	17
9. Packing Drawing .....	18
10. Precautions for Use of LCD Modules.....	19

**Record of Revision**

<b>Rev</b>	<b>Issued Date</b>	<b>Description</b>	<b>Editor</b>
1.0	2018-01-22	First release	Dongliang Xie
2.0	2018-05-23	Final Specification Release	Dongliang Xie
2.1	2019-02-28	Add IVDD in Page	Dongliang Xie
2.2	2020-07-15	Page 4~5: Update the connector name. Page 10: Update LVDS Digital Operating Current. Page 7~8: Add Inrush current. Add note 4. Page 9~12: Update the Timing based on IC datasheet.	Louis Young

The information contained herein is the exclusive property of TIANMA MICRO-ELECTRONICS Corporation, and shall not be distributed, reproduced, or disclosed in whole or in part without prior written permission of TIANMA MICRO-ELECTRONICS Corporation.

## 1 General Specification

Feature		Spec
<b>Display Spec.</b>	Size	7.0inch
	Resolution	1280(RGB) x 800
	Technology Type	a-Si
	Pixel Configuration	R.G.B. Vertical Stripe
	Pixel Pitch (mm)	0.117(H)x 0.117(V)
	Display Mode	SFT with Normally Black
	Surface Treatment(Up Polarizer)	HC
	Viewing Direction	All direction
<b>Mechanical Characteristics</b>	LCM (W x H x D) (mm)	LCM: 161.00 x107.00
		CTP+LCM:181.76x125.60x6.35
	Active Area(mm)	TFT LCD:149.76 x 93.60
		CTP:152.16x96
	CTP Structure	G+G
	CTP Touch Method	Bare finger
	Number of simultaneous touches	≤5 points
	Minimum Touch Area	Φ7
	Finger Touch Pitch	≥14mm
	With /Without TSP	With TSP
Matching Connection Type	CN1:FI-SE20P-HFE-E3000 CN2:FI-S6P-HFE-E1500 CN3: Molex 53261-0871	
Weight (g)	228.5	
<b>Electrical Characteristics</b>	Interface	LCD: LVDS 6/8bits
		CTP: USB
	Color Depth	262K/16.7M
Driver IC	LCD: 3*ST5821C and 1*ST5084C	
	CTP: ILI2511	

Note 1: Viewing direction for best image quality is different from TFT definition; there is a 180 degree shift.

Note 2: Requirements on Environmental Protection: Q/S0002

Note 3: LCM weight tolerance: +/- 5%

## 2. Input/output Terminals

### 2.1 TFT CN pin assignment

Connector type: CN1:JAE FI-SE20P-HFE-E3000 CN2:JAE FI-S6P-HFE -E1500  
CN3:MOLEX 53261-0871

No	Symbol	I/O	Description	Comment
CN1				
1	IND3+	I	Positive LVDS Differential data input(3)	
2	IND3-	I	Negative LVDS Differential data input(3)	
3	NC	-	No Connection	
4	SEL6/8	I	6bit/8bit mode select H : 6-bit mode L : 8-bit mode	
5	VSS	P	Power Ground	
6	PINC+	I	Positive LVDS Differential clock input	
7	NINC-	I	Negative LVDS Differential clock input	
8	VSS	P	Power Ground	
9	IND2+	I	Positive LVDS Differential data input(2)	
10	IND2-	I	Negative LVDS Differential data input(2)	
11	VSS	P	Power Ground	
12	IND1+	I	Positive LVDS Differential data input(1)	
13	IND1-	I	Negative LVDS Differential data input(1)	
14	VSS	P	Power Ground	
15	IND0+	I	Positive LVDS Differential data input(0)	
16	IND0-	I	Negative LVDS Differential data input(0)	
17	VSS	P	Power Ground	
18	NC	-	No Connection	
19	VDD	P	Power Supply	
20	VDD	P	Power Supply	
CN2				
1	VLED	P	Backlight power supply	
2	VLED	P	Backlight power supply	
3	VLSS	P	VLED Ground	
4	VLSS	P	VLED Ground	
5	LED_EN	I	Backlight on/off control	
6	LED_PWM	I	Backlight dimming control	
CN3				
1	VDD1	P	Power supply for CTP	
2	D-	I/O	USB data- pin	
3	D+	I/O	USB data+ pin	
4	VSS1	P	Power Ground	
5	NC	-	No Connection	
6	NC	-	No Connection	
7	NC	-	No Connection	
8	NC	-	No Connection	

Note1: I/O definition.

I---Input, O---Output, P--- Power/Ground, N--- No connection

The information contained herein is the exclusive property of TIANMA MICRO-ELECTRONICS Corporation, and shall not be distributed, reproduced, or disclosed in whole or in part without prior written permission of TIANMA MICRO-ELECTRONICS Corporation.

### 3. Absolute Maximum Ratings

#### 3.1 Driving TFT LCD Panel

GND=0V, Ta = 25°C

Item	Symbol	Min	Max	Unit	Remark
Power Voltage	VDD	-0.5	5.0	V	
Backlight Forward Current	I <sub>LED</sub>	-	25	mA	For each LED
Operating Temperature	T <sub>OPR</sub>	-20	70	°C	
Storage Temperature	T <sub>STG</sub>	-30	80	°C	

Table 3.1 absolute maximum rating

#### 3.2 CTP absolute Maximum Ratings

Item	Symbol	Min.	Max	Unit	Remark
Input Voltage	VDD1	-0.3	5.5	V	
Operating Temperature	T <sub>OPR</sub>	-20	70	°C	
Storage Temperature	T <sub>STG</sub>	-30	80	°C	

Table 3.2 CTP absolute Maximum Ratings

## 4 Electrical Characteristics

### 4.1 Driving TFT LCD Panel

Ta = 25°C

Item	Symbol	Min	Typ	Max	Unit	Remark
Digital Supply Voltage	VDD	3.0	3.3	3.6	V	
Supply Current	IVDD	-	250	-	mA	
Power consumption	P <sub>TFT</sub>	-	825	-	mW	

Table 4.1 LCD module electrical characteristics

### 4.2 CTP recommended Operating Condition

 (T<sub>A</sub> = 25°C, VDD1 = 5.0V)

Item	Symbol	Min	Typ	Max	Unit	Note
Power supply voltage	VDD1	4.7	5.0	5.3	V	
Operation current	I <sub>op</sub>	-	100	-	mA	

### 4.3 TFT Driving Backlight

Item	Symbol	Min	Typ	Max	Unit	Remark
Backlight power supply voltage	VLED	5.5	12	12.5	V	
Backlight power supply current	I <sub>Total</sub>	-	185	-	mA	Note1
Backlight power consumption	P <sub>Total</sub>	-	2220	-	mW	
Backlight power supply Inrush current	I <sub>inrush</sub>			1.5	A	Note4
Input voltage for VLED_PWM signal	High level	-	2.0	-	5.0	V
	Low level	-	0	-	0.4	V
Input voltage for VLED_EN	High level	-	2.0	-	5.0	V
	Low level	-	0	-	0.4	V
VLED_PWM frequency	F <sub>pwm</sub>	200	-	20k	HZ	
VLED_PWM duty	D	5		100	%	Note2
Operating Life Time	--	--	50000	--	hrs	Note3

Note 1: I<sub>Total</sub> is the power supply current of LED driver, P<sub>Total</sub> is the power consumption of LED driver and backlight.

Note 2: According to LED driver IC characteristics, the minimum value of VLED\_PWM duty may vary with VLED\_PWM frequency, higher the frequency, bigger the duty.

Note 3: Optical performance should be evaluated at Ta=25°C only.

If LED is driven by high current, high ambient temperature & humidity condition. The life time of LED will be reduced.


The information contained herein is the exclusive property of TIANMA MICRO-ELECTRONICS Corporation, and shall not be distributed, reproduced, or disclosed in whole or in part without prior written permission of TIANMA MICRO-ELECTRONICS Corporation.



Operating life means brightness goes down to 50% of initial brightness.  
 Typical operating life time is estimated data.

Note4: When the rise time of VLED is 470us, VLED's inrush current should be less than 1.5 A(VLED=12V)

**4.3 TFT Block Diagram**


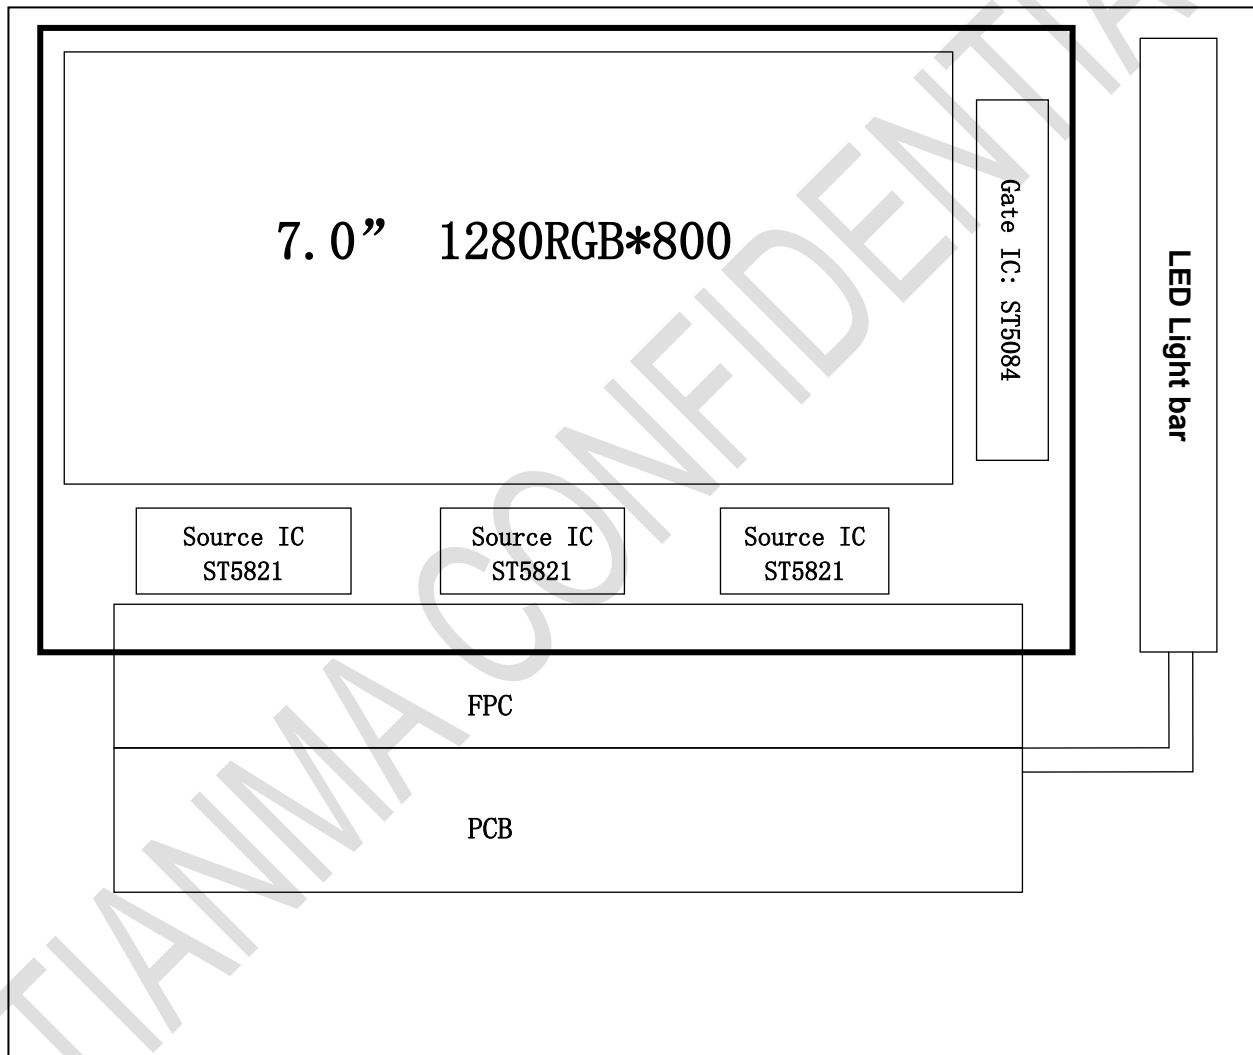


**Figure 4.3 TFT Block Diagram**

## 5. Timing Chart

### 5.1 AC Electrical Characteristics

Parameter	Symbol	Min	Typ.	Max.	Unit	Conditions
Clock Frequency	$R_{XFCLK}$	20		80	MHz	
Clock Period	$R_{XTCLK}$	12.5		50	ns	
1 data bit time	UI	-	1/7	-	$R_{XTCLK}$	
Clock high time	$T_{LVCH}$		4		UI	
Clock low time	$T_{LVCL}$		3		UI	
Position 1	$T_{POS1}$	-0.25	0	0.25	UI	
Position 2	$T_{POS2}$	0.75	-	1.25	UI	
Position 3	$T_{POS3}$	0.75	1	1.25	UI	
Position 4	$T_{POS4}$	1.75	-	2.25	UI	
Position 5	$T_{POS5}$	1.75	2	2.25	UI	
Position 6	$T_{POS6}$	2.75	-	3.25	UI	
Position 7	$T_{POS7}$	2.75	3	3.25	UI	
Position 8	$T_{POS8}$	3.75	-	4.25	UI	
Position 9	$T_{POS9}$	3.75	4	4.25	UI	
Position 10	$T_{POS10}$	4.75	-	5.25	UI	
Position 11	$T_{POS11}$	4.75	5	5.25	UI	
Position 12	$T_{POS12}$	5.75	-	6.25	UI	
Position 13	$T_{POS13}$	5.75	6	6.25	UI	
Position 14	$T_{POS14}$	6.75	-	7.25	UI	
PLL wake-up time	$T_{enPLL}$			150	us	

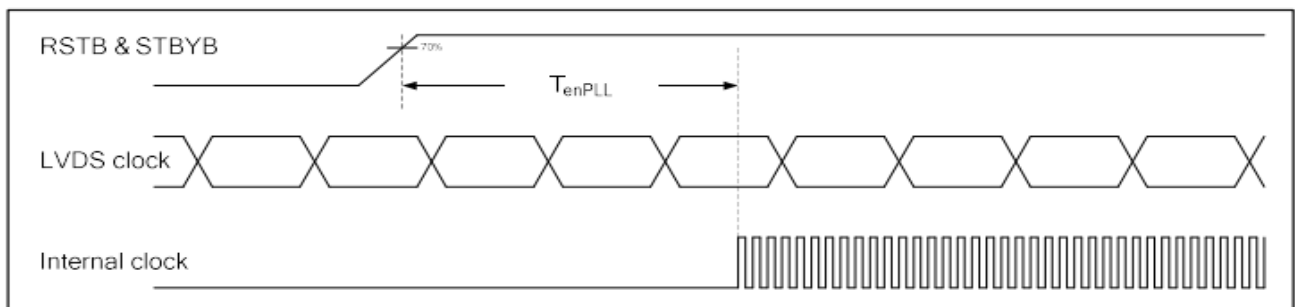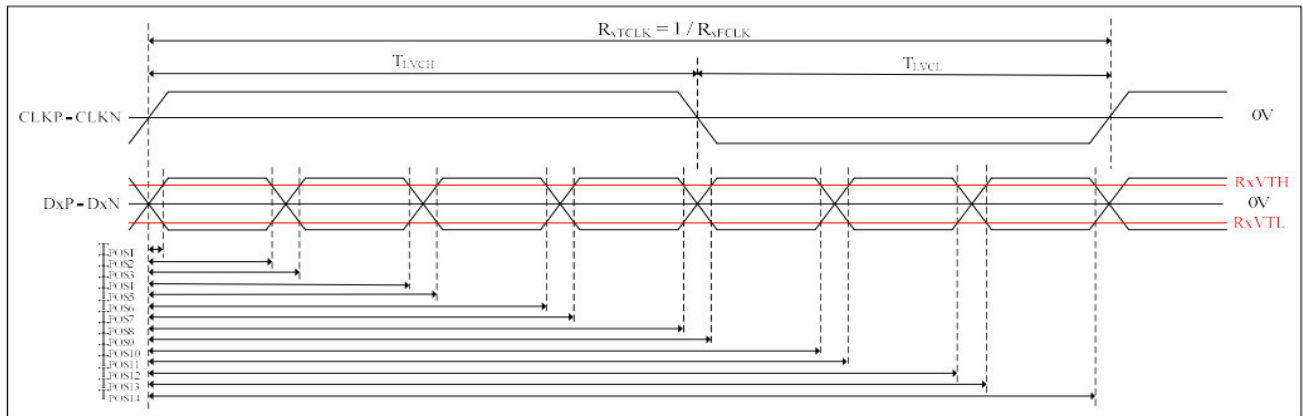


The information contained herein is the exclusive property of TIANMA MICRO-ELECTRONICS Corporation, and shall not be distributed, reproduced, or disclosed in whole or in part without prior written permission of TIANMA MICRO-ELECTRONICS Corporation.

5.2 DC Electrical Characteristics

VDD=3.3V, AGND=GND=0V, Ta=25°C

Parameter	Symbol	Min	Typ	Max	Unit	Remark
Differential input high Threshold voltage	$R_{xVTH}$	-	-	+0.1	V	
Differential input Low Threshold voltage	$R_{xVTL}$	-0.1	-	-	V	
Input voltage range	$R_{xVIN}$	0	-	VDD-1.0	V	
Differential input common Mode voltage	$R_{xVCM}$	0.6	-	$2.4- V_{ID} /2$	V	
Differential input voltage	$ V_{ID} $	0.2	--	0.6	V	
Differential input leakage Current	$R_{V_{xIIZ}}$	-10	--	+10	uA	
LVDS Digital Operating Current	$I_{ddlvds}$	-	10	15	mA	Fclk=65MHz, VDD=3.3V, Note 1
LVDS Digital Stand-by Current	$I_{stlvds}$	-	10	50	uA	Clock & all functions are stopped, Note 1

Note 1: The current is for each data or clock pin, not for the total.

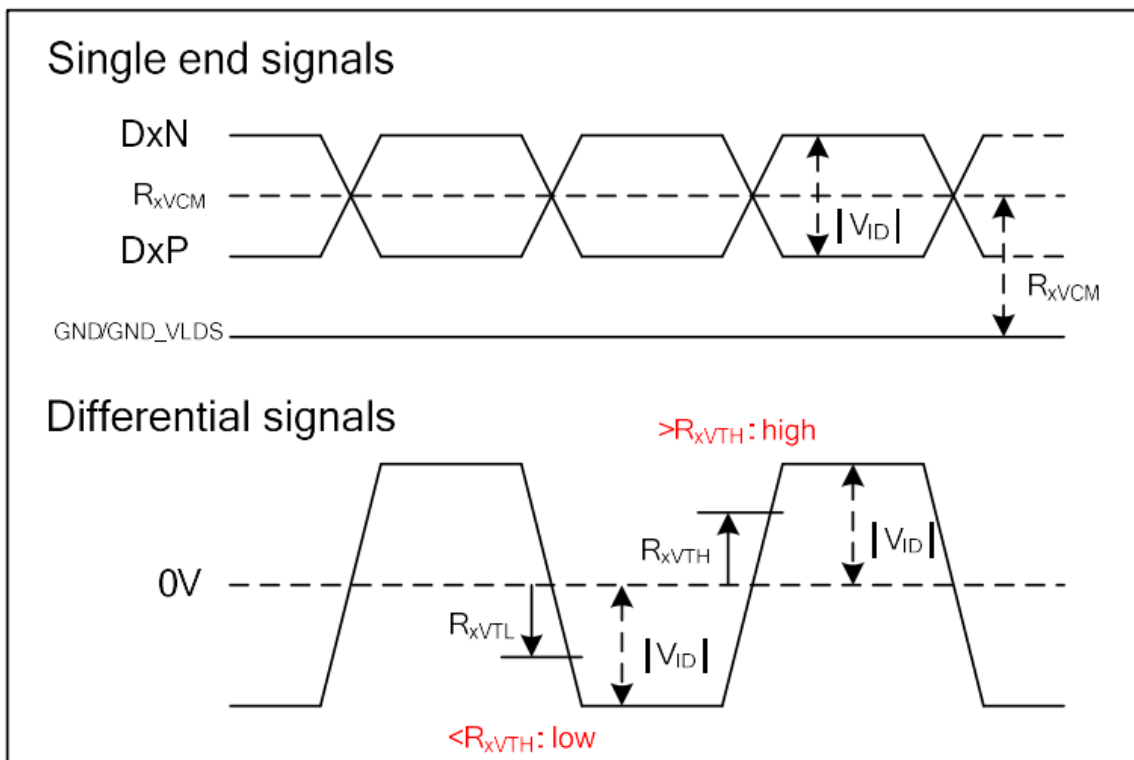

The information contained herein is the exclusive property of TIANMA MICRO-ELECTRONICS Corporation, and shall not be distributed, reproduced, or disclosed in whole or in part without prior written permission of TIANMA MICRO-ELECTRONICS Corporation.


### 5.3 Input timing

1280x800 (RES[3:0] = 0010)

Parameter	Symbol	Value			Unit	Note
		Min.	Typ.	Max.		
CLK frequency	t <sub>CLK</sub>	68.4	71.9	78.1	Mhz	
Horizontal blanking time	t <sub>HBT</sub>	136	144	164	t <sub>CLK</sub>	t <sub>HBP</sub> + t <sub>HFP</sub>
Horizontal back porch	t <sub>HBP</sub>	5	5	164- t <sub>HFP</sub>	t <sub>CLK</sub>	
Horizontal display area	t <sub>HD</sub>	1280	1280	1280	t <sub>CLK</sub>	
Horizontal front porch	t <sub>HFP</sub>	131	139	159	t <sub>CLK</sub>	
Horizontal period	t <sub>H</sub>	1416	1424	1444	t <sub>CLK</sub>	
Horizontal pulse width	t <sub>HPW</sub>	1	1	256	t <sub>CLK</sub>	
Vertical blanking time	t <sub>VBT</sub>	5	42	101	t <sub>H</sub>	t <sub>VBP</sub> + t <sub>VFP</sub>
Vertical back porch	t <sub>VBP</sub>	2	2	101- t <sub>VFP</sub>	t <sub>H</sub>	
Vertical display area	t <sub>VD</sub>	800	800	800	t <sub>H</sub>	
Vertical front porch	t <sub>VFP</sub>	3	40	99	t <sub>H</sub>	
Vertical period	t <sub>V</sub>	805	842	901	t <sub>H</sub>	
Vertical pulse width	t <sub>VPW</sub>	1	1	128	t <sub>H</sub>	

### 5.4 Data Input Format

#### VESA data mapping

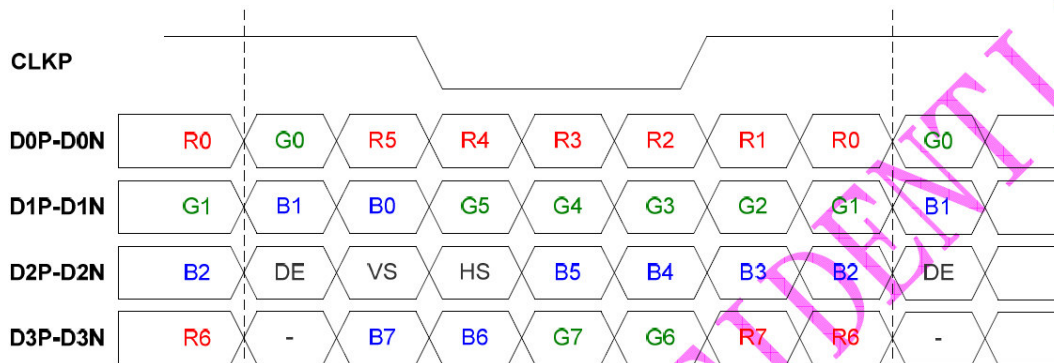

Note 1 : for 6 bit mode, MSB are R/G/B[5] and R/G/B[0] are LSB  
 Note 2 : for 8 bit mode, MSB are R/G/B[7] and R/G/B[0] are LSB

**5.5 Power On/Off Timing**

To prevent the device damage from latch up, the power on/off sequence shown below must be followed.

Power ON&Power Off:

Item	Symbol	Min	Typ	Max	Unit	Remark
VDD 3.3 to LVDS signal starting	Tp1	15	-	100	ms	
VDD rising time	Tr	-	-	3	ms	
LVDS signal starting to backlight on	Tp2	150	-	-	ms	
LVDS signal off to VDD 0V	Tp3	120	-	-	ms	
Backlight off to signal off	Tp4	150	-	-	ms	
VDD failing time	Tf	1	-	5	ms	



### 6. Optical Characteristics


Item	Symbol	Condition	Min	Typ	Max	Unit	Remark
View Angles	$\theta T$	$CR \geq 10$	75	85	-	Degree	Note 2
	$\theta B$		75	85	-		
	$\theta L$		75	85	-		
	$\theta R$		75	85	-		
Contrast Ratio	CR	$\theta = 0^\circ$	600	800	-		
Response Time	$T_{ON}$	25°C	-	35	40	ms	Note1 Note4
	$T_{OFF}$						
Chromaticity	White	x	0.265	0.315	0.365	Note5 Note1	
		y	0.291	0.341	0.391		
	Red	x	0.526	0.576	0.626		
		y	0.291	0.341	0.391		
	Green	x	0.297	0.347	0.397		
		y	0.547	0.597	0.647		
	Blue	x	0.103	0.153	0.203		
		y	0.050	0.100	0.150		
Uniformity	U		70	75	-	%	Note1、 Note6
NTSC			45	50	-	%	
Luminance	L		320	500	-	cd/m <sup>2</sup>	Note7

Test Conditions:


1.  $I_F = 20mA$ (one channel), the ambient temperature is 25°C.
2. The test systems refer to Note 1 and Note 2.

Note 1: Definition of optical measurement system.

The optical characteristics should be measured in dark room. After 10 Minutes operation, the optical properties are measured at the center point of the LCD screen. All input terminals LCD panel must be ground when measuring the center area of the panel.

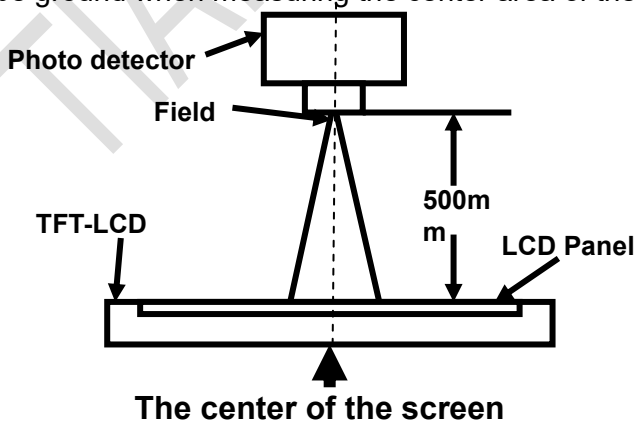

Note 2: Definition of viewing angle range and measurement system.  
viewing angle is measured at the center point of the LCD.

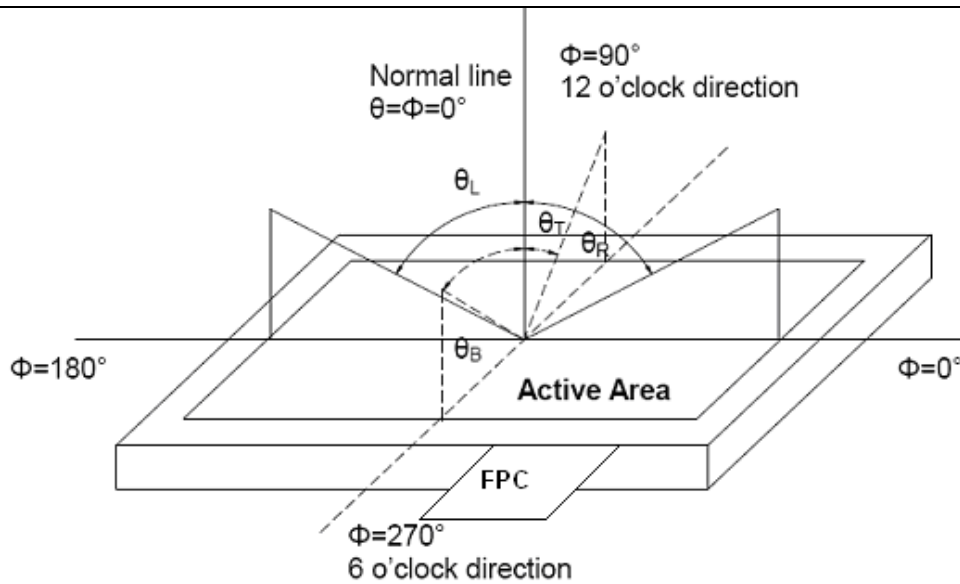

Note 3: Definition of contrast ratio

$$\text{Contrast ratio (CR)} = \frac{\text{Luminance measured when LCD is on the "White" state}}{\text{Luminance measured when LCD is on the "Black" state}}$$


“White state “: The state is that the LCD should drive by V<sub>white</sub>.

“Black state”: The state is that the LCD should drive by V<sub>black</sub>.

V<sub>white</sub>: To be determined    V<sub>black</sub>: To be determined.

Note 4: Definition of Response time

The response time is defined as the LCD optical switching time interval between “Black” state and “White” state. Rise time (T<sub>ON</sub>) is the time between photo detector output intensity changed from 10% to 90%. And fall time (T<sub>OFF</sub>) is the time between photo detector output intensity changed from 90% to 10%.

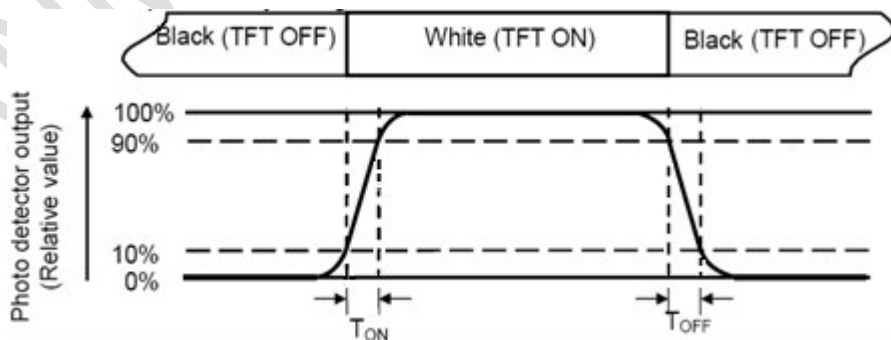

Note 5: Definition of color chromaticity (CIE1931)


Color coordinates measured at center point of LCD.

Note 6: Definition of Luminance Uniformity

Active area is divided into 9 measuring areas (Refer Fig. 2). Every measuring point is placed at the center of each measuring area.

$$\text{Luminance Uniformity (U)} = \text{Lmin} / \text{Lmax}$$

L-----Active area length W----- Active area width

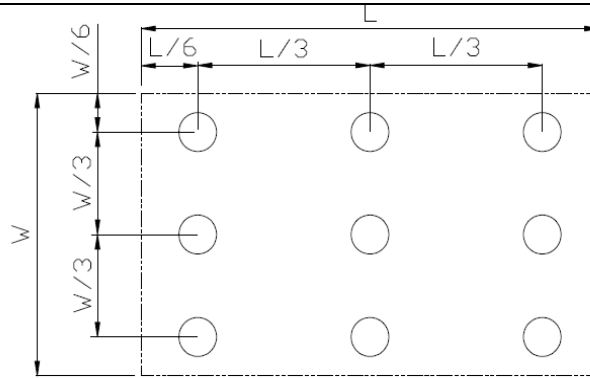

$L_{max}$ : The measured Maximum luminance of all measurement position.

$L_{min}$ : The measured Minimum luminance of all measurement position.

Note 7: Definition of Luminance:

Measure the luminance of white state at center point.

TIANMA CONFIDENTIAL



## 7. Reliability Test

No	Test Item	Condition	Remarks
1	High Temperature Operation	Ta = +70°C, 240 hours	IEC60068-2-1:2007 GB2423.2-2008
2	Low Temperature Operation	Ta = -20°C, 240 hours	IEC60068-2-1:2007 GB2423.1-2008
3	High Temperature Storage	Ta = +80°C, 240 hours	IEC60068-2-1:2007 GB2423.2-2008
4	Low Temperature Storage	Ta = -30°C, 240 hours	IEC60068-2-1:2007 GB2423.1-2008
5	Operate at High Temperature and Humidity	Ta=+60°C、RH=90%, 240 hours	IEC60068-2-78 :2001 GB/T2423.3—2006
6	Thermal Shock (non-operation)	-30°C (30min) ↔ 80°C (30min) ,Change Time:5min,20cycle	Start with cold temperature, End with high temperature, IEC60068-2-14:1984,G B2423.22-2002
7	ESD	C=150pF、R=330Ω Air: ±8KV Contact:±4KV 5point/panel, 5times (Environment:15°C~35°C, 30%~60%.86Kpa~106Kpa)	IEC61000-4-2:2001 GB/T17626.2-2006
8	Package Drop Test	Height: 60 cm, 1corner,3edges,6surfaces	IEC60068-2-32:1990 GB/T2423.8—1995


Note1: Ts is the temperature of panel's surface.

Note2: Ta is the ambient temperature of sample.

Note3: Before cosmetic and function test, the product must have enough recovery time, at least 24 hours at room temperature.

Note4: In the standard condition, there shall be no practical problem that may affect the display function. After the reliability test, the product only guarantees operation, but don't guarantee all of the cosmetic specification.

### 8. Mechanical Drawing

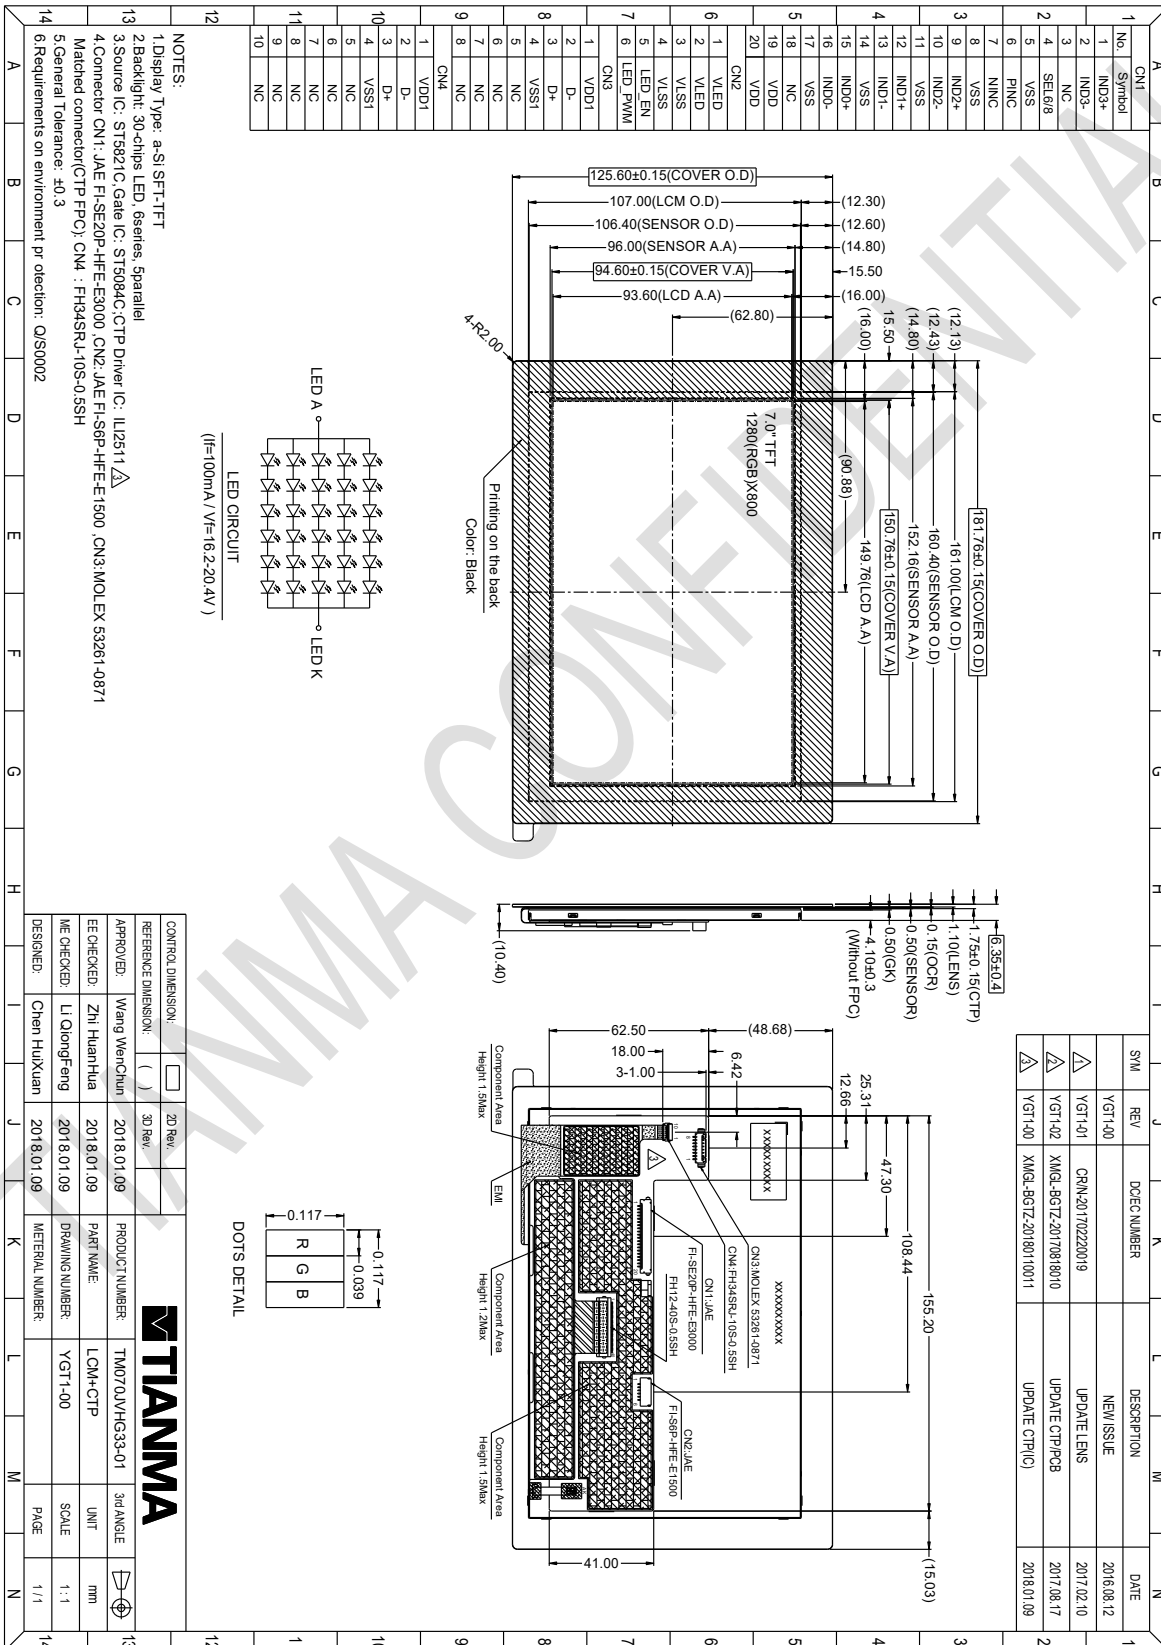


Note 1: Cross section of EMI film on FPC has conductivity.

The information contained herein is the exclusive property of TIANMA MICRO-ELECTRONICS Corporation, and shall not be distributed, reproduced, or disclosed in whole or in part without prior written permission of TIANMA MICRO-ELECTRONICS Corporation.

### 9. Packing Drawing

No	Item	Model (Materiel)	Dimensions(mm)	Unit Weight(Kg)	Quantity	Remark
1	LCM module	TM070JVHG33-01	181.76×125.60×6.35	0.2285	36	
2	Tray	PET ( Transmit )	485×330×23	0.202	12	
3	Dust-proof Bag	PE	700×545×0.05	0.045	1	
4	BOX	CORRUGATED PAPER	520×345×74	0.373	3	
5	Desiccant	Desiccant	45×35	0.002	6	
6	EPE	EPE	384.32x266.0x1.0	0.0019	9	
7	Label	Label	100X52	0.0004	1	
8	Carton	CORRUGATED PAPER	544×365×250	0.94	1	
9	Total weight(Kg)	12.78±5%				

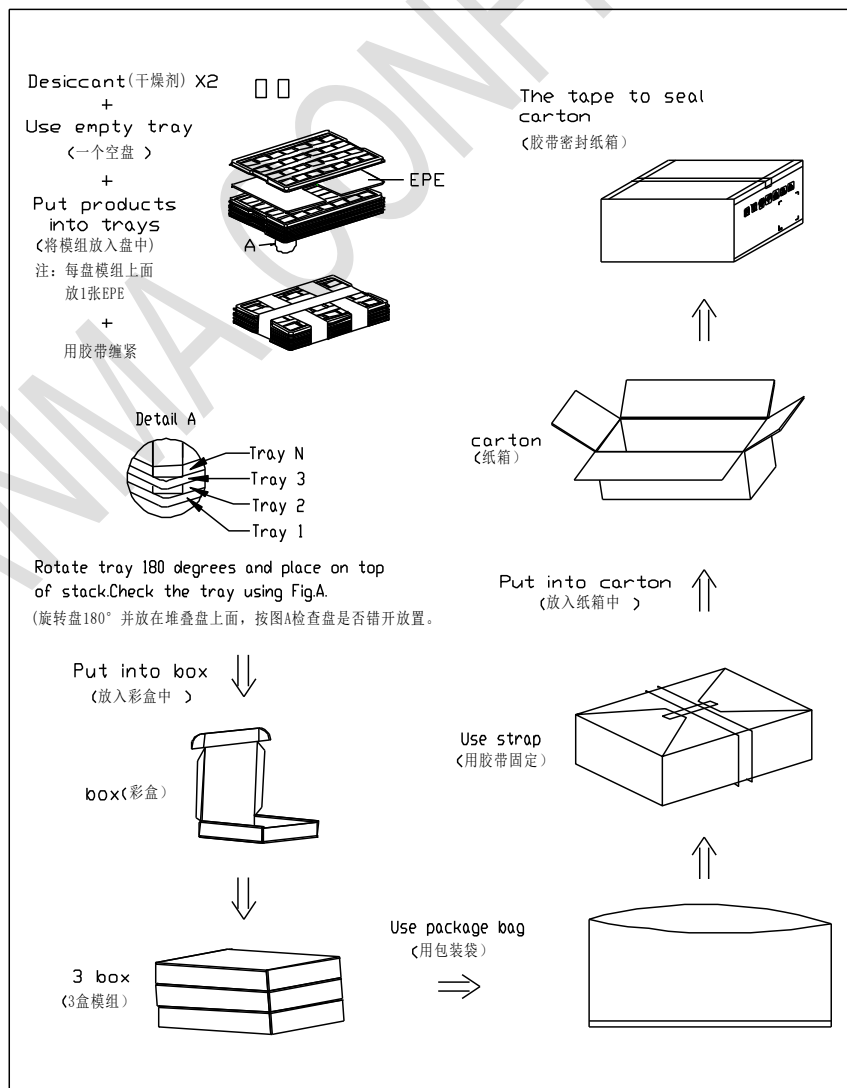

The information contained herein is the exclusive property of TIANMA MICRO-ELECTRONICS Corporation, and shall not be distributed, reproduced, or disclosed in whole or in part without prior written permission of TIANMA MICRO-ELECTRONICS Corporation.

## 10. Precautions for Use of LCD Modules

### 10.1 Handling Precautions

10.1.1 The display panel is made of glass. Do not subject it to a mechanical shock by dropping it from a high place, etc.

10.1.2 If the display panel is damaged and the liquid crystal substance inside it leaks out, be sure not to get any in your mouth, if the substance comes into contact with your skin or clothes, promptly wash it off using soap and water.

10.1.3 Do not apply excessive force to the display surface or the adjoining areas since this may cause the color tone to vary.

10.1.4 The polarizer covering the display surface of the LCD module is soft and easily scratched. Handle this polarizer carefully.

10.1.5 If the display surface is contaminated, breathe on the surface and gently wipe it with a soft dry cloth. If still not completely clear, moisten cloth with one of the following solvents:

- Isopropyl alcohol
- Ethyl alcohol

Solvents other than those mentioned above may damage the polarizer. Especially, do not use the following:

- Water
- Ketone
- Aromatic solvents

10.1.6 Do not attempt to disassemble the LCD Module.

10.1.7 If the logic circuit power is off, do not apply the input signals.

10.1.8 To prevent destruction of the elements by static electricity, be careful to maintain an optimum work environment.

a. Be sure to ground the body when handling the LCD Modules.

b. Tools required for assembly, such as soldering irons, must be properly ground.

c. To reduce the amount of static electricity generated, do not conduct assembly and other work under dry conditions.

d. The LCD Module is coated with a film to protect the display surface. Be care when peeling off this protective film since static electricity may be generated.

### 10.2 Storage precautions

10.2.1 When storing the LCD modules, avoid exposure to direct sunlight or to the light of fluorescent lamps.

10.2.2 The LCD modules should be stored under the storage temperature range. If the LCD modules will be stored for a long time, the recommend condition is:

Temperature :  $0^{\circ}\text{C} \sim 40^{\circ}\text{C}$

Relatively humidity:  $\leq 80\%$

10.2.3 The LCD modules should be stored in the room without acid, alkali and harmful gas.

10.3 The LCD modules should be no falling and violent shocking during transportation, and also should avoid excessive press, water, damp and sunshine.



ALL TECHNOLOGIES. ALL COMPETENCIES. ONE SPECIALIST.



DATA MODUL AG  
Landsberger Straße 322  
DE-80687 Munich  
Phone: +49-89-56017-0

DATA MODUL WEIKERSHEIM GMBH  
Lindenstraße 8  
DE-97990 Weikersheim  
Phone: +49-7934-101-0



More information and worldwide locations can be found at

[www.data-modul.com](http://www.data-modul.com)