




## 21.5 inch (54.6cm) Part-No. 12024710 eTD215W3302-AUA-A, G215HVN01.1 incl. easyTOUCH

	eldziswssuz-AuA-A, Gzishvinui.i ilici. edsylouch
Display	
Panel Type	AUO G215HVN01.1
Resolution (pixel) / format	1920 x 1080/ wide
Brightness (typical)	250 cd/m <sup>2</sup>
Display Mode	MVA, Normally Black
Customer Interface Display	LVDS
Contrast ratio (typical)	5000:1
Backlight	LED
Glass and Touch	
Cover glass	3mm Glare Glass, thermally strengthened, no treatment
	Printing RAL9005 ceramic, light-tight
	Dimensions according to outline drawing
Touch sensor type	21.5" easyTOUCH 12014893
Active area touch sensor (W x H)	480.0 x 271.5 mm
Optical Specification	according to DATA MODUL Outgoing Specification 12005966
Touch Interface	USB mXT2952T2
Assembling	
Glass to touch	Optically bonded
Glass/Touch assembly to display	AirGap-Bonding with 4 stripes industrial double-sided adhesive tape
Touch Controllerboard	mounted on rear side of TFT with metal bracket
Accessories	
Touch Controller	easyTOUCH mXT2952T2 Driverless USB
Environmental conditions	
Temperature (operating)	0 to 60 °C
Markenter Discussion	
Mechanical dimensions	
Outline dimension (W x H x T)	516.0 x 311.0 x 25.0 mm
M/- 1-1-4	Detailed dimensions according to outline drawing
Weight	approx. 3.8 kg (±10%)

Technical specification subject to change without prior notice.

For further information, please refer to detailed specification of individual component.

## DATA MODUL

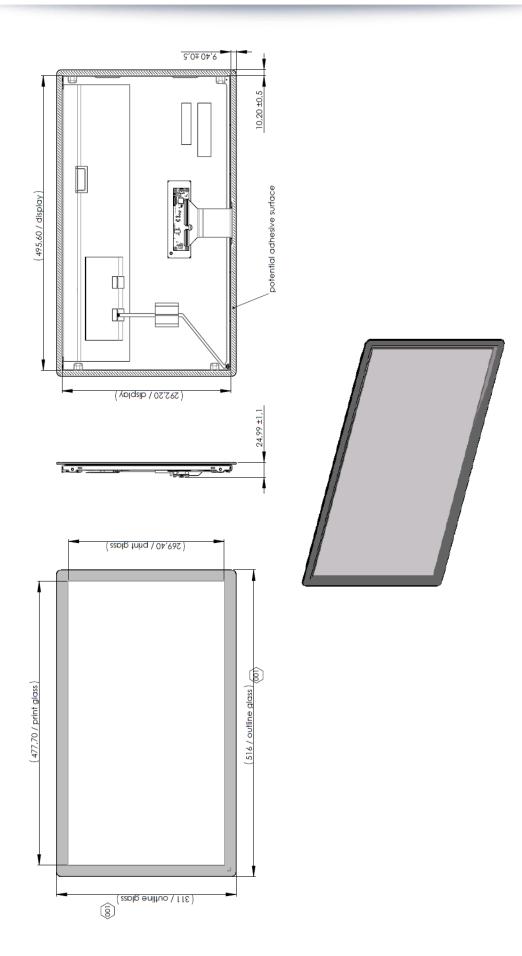

Technical specification subject to change without prior notice.

For further information, please refer to detailed specification of individual component.

eTD215W3302-AUA-A 2021-01-07