

resistiveTOUCH Display - Standard Data Modul Product

15.0" / 38.1 cm Part-No. 12014617 rTD150S11-AUA-A G150XTN06.0 incl. 4w-Touch

Dis	blaν	,

Backlight

Panel Type AUO G150XTN06.0 (12011606) Resolution (pixel) / format 1024 x 768 / square Brightness (typical) 450 cd/m² Display Mode TN, Normally white Customer Interface Display LVDS Contrast ratio (typical) 700:1

Resistive Touch Sensor

Touch sensor type 4-wire resistive Touch Sensor (TP01109) Active area touch sensor (W x H) 229.0 x 305.0 mm according to DATA MODUL Outgoing Specification 12005964 Optical Specification

LED 50k hrs.

Touch Interface USB or RS232

Assembling

Glass/Touch assembly to display Assembled by Air Gap Bonding with 4-Stripes double-sided Tape

Environmental conditions

-20°C to +70°C Temperature (operating)

Mechanical dimensions

Outline dimensions (W x H x T) 328.00 x 252.0 x 14.7 mm Detailed dimensions and tolerances according to outline drawing 12002656 see "1009959.pdf" Weight 1213 g (±10%)

Should you have an application for which the specification of standard components is not sufficient (e.g. medical, automotive, avionics), please contact us.


The system integrator of the product is responsible for compliance of the required approvals.

Technical specification subject to change without prior notice.

15.0_rTD150S11-AUA-A_12014617.docx

2020-09-01



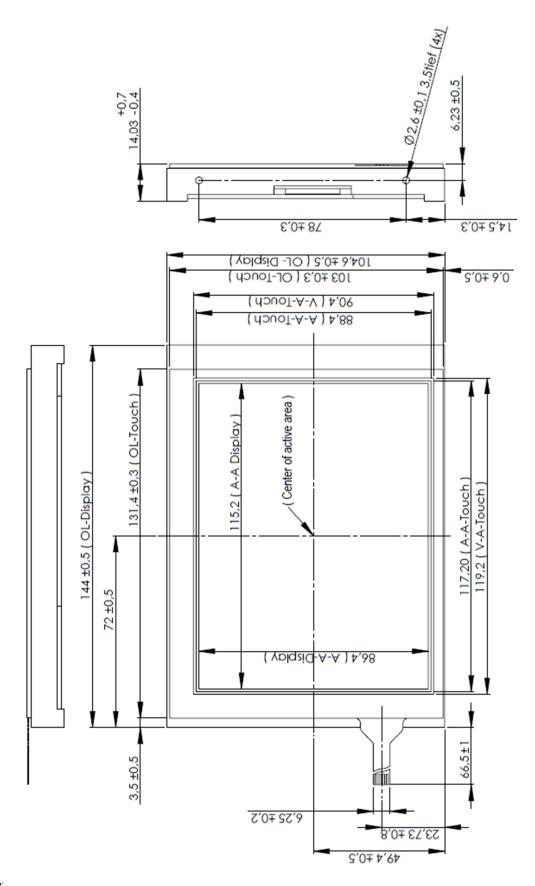

Important Note:

Should you have an application for which the specification of standard components is not sufficient (e.g. medical, automotive, avionics), please contact us.

The system integrator of the product is responsible for compliance of the required approvals.

Technical specification subject to change without prior notice.

15.0_rTD150S11-AUA-A_12014617.docx

2020-09-01