



SPECIFICATION



P1160FHF1MA01

11.6" - FHD – LVDS

Version: 2.0

Date: 09.05.2023

Note: This specification is subject to change without prior notice

CONTENTS

1. SUMMARY	1
1.1 General Description	1
1.2 Features	1
2. GENERAL SPECIFICATIONS	2
3. INPUT / OUTPUT TERMINALS	3
3.1 CN1 Pin assignment (LCD Interface)	3
3.2 CN2 Pin assignment (Back Light)	4
4. ABSOLUTE MAXIMUM RATINGS	5
5. ELECTRICAL CHARACTERISTICS	6
5.1 DC Characteristics for Panel Driving	6
5.2 DC Characteristics for Backlight Driving	6
5.3 Recommended Power ON/OFF Sequence	7
5.4 LCD Module Block Diagram	8
6. TIMING CHARACTERISTICS	9
6.1 AC characteristics	9
6.2 Data Input Timing Parameter Setting	10
6.3 DE Mode Timing Diagram	11
7. OPTICAL CHARACTERISTICS	12
8. RELIABILITY TEST	15
9. MECHANICAL DRAWING	16
10. PACKING INSTRUCTION	17
11. PRECAUTIONS FOR USE OF LCD MODULES	20
11.1 Handling Precautions	20
11.2 Storage precautions	20
11.3 Transportation Precautions	20
11.4 Screen saver Precautions	20
11.5 Safety Precautions	20

1. Summary

1.1 General Description

This is a 11.6 inch a-Si TFT-LCD module with Normal- Black technology. It is composed of a TFT-LCD panel, PCB, FPC and a LED backlight unit.

1.2 Features

- Ultra-wide viewing angle Super Fine TFT (SFT)
- High luminance
- Interface: LVDS
- Surface treatment: HC
- Acquisition product for UL62368-1/CSA C22.2 No.62368-1-03 (File number: E250878)
- Compliant with the European RoHS Directive (2011/65/EU) and Delegated Directive (2015/863/EU, Amending Annex II of 2011/65/EU)

2. General Specifications

	Feature	Spec	Unit
Display Spec	Size	11.6 inch	
	Resolution	1920(RGB)x1080	
	Pixel Pitch	0.1335 x 0.1335	mm
	TFT Active Area	256.32 x 144.18	mm
	Technology Type	a-Si	
	Pixel Configuration	R.G.B Vertical Stripe	
	Display Mode	SFT, Normally Black	
	Surface Treatment	HC	
	Viewing Direction	All	
Mechanical Characteristics	LCM (W x H x D)outline	273.50 x 166.50 x 7.80	mm
	Weight	530	g
Optical Characteristics	Luminance	1000 typ	cd/m ²
	Contrast Ratio	900 typ	
	NTSC	70 typ	%
	Viewing Angle	88/88/88/88 typ	degree
Electrical Characteristics	Interface	LVDS	
	Color Depth	16.7 Million	color
	Power Consumption	LCD:1320 typ; Backlight:9396 typ.	mW

Table 2.1 General TFT Specifications.

Note 1: Requirements on Environmental Protection: Q/S0002+HF;

Note 2: LCM weight tolerance: ± 5%.

3. Input / Output Terminals

3.1 CN1 Pin assignment (LCD Interface)

Connector Information	
LCD Module connector	IPEX 20455-030E-76 (socket)
Matching connector	IPEX 20453-230T-11 (plug)

Table 3.1.1 Connector information

No	Symbol	I/O	Description	Comment
1	DA0-	I	Odd pixel data 0	Note 1
2	DA0+	I	Odd pixel data 0	Note 1
3	DA1-	I	Odd pixel data 1	Note 1
4	DA1+	I	Odd pixel data 1	Note 1
5	DA2-	I	Odd pixel data 2	Note 1
6	DA2+	I	Odd pixel data 2	Note 1
7	GND	P	Ground	Note 2
8	CLKA-	I	Odd pixel clock	Note 1
9	CLKA+	I	Odd pixel clock	Note 1
10	DA3-	I	Odd pixel data 3	Note 1
11	DA3+	I	Odd pixel data 3	Note 1
12	DB0-	I	Even pixel data 0	Note 1
13	DB0+	I	Even pixel data 0	Note 1
14	GND	P	Ground	Note 2
15	DB1-	I	Even pixel data 1	Note 1
16	DB1+	I	Even pixel data 1	Note 1
17	GND	P	Ground	Note 2
18	DB2-	I	Even pixel data 2	Note 1
19	DB2+	I	Even pixel data 2	Note 1
20	CLKB-	I	Even pixel clock	Note 1
21	CLKB+	I	Even pixel clock	Note 1
22	DB3-	I	Even pixel data 3	Note 1
23	DB3+	I	Even pixel data 3	Note 1
24	GND	P	Ground	Note 2
25	GND	P	Ground	Note 2
26	GND	P	Ground	Note 2
27	STBYB	I	Standby mode control. STBYB = L, STBYB mode STBTB = H, normal operation	
28	VCC	P	Power supply	Note 2
29	VCC	P	Power supply	Note 2
30	VCC	P	Power supply	Note 2

Table 3.1.2 Pin Assignment for LCD Interface

I/O definition:

I----Input P----Power/Ground

Note1: Twist pair wires with 100Ω (characteristic impedance) should be used between LCD panel signal processing board and LVDS transmitter.

Note2: All GND and VCC terminals should be used without any non-connected lines.

Note3: This LCD module only supports DE mode.

3.2 CN2 Pin assignment (Back Light)

Connector Information	
Matching connector	Kyocera 04 6299 614 020 846+

Table 3.2.1 Connector information

No	Symbol	I/O	Description	Wire Color
1	A1(LED+)	P	Anode 1	
2	A2(LED+)	P	Anode 2	
3	A3(LED+)	P	Anode 3	
4	A4(LED+)	P	Anode 4	
5	NC	N	No connection	
6	NC	N	No connection	
7	NC	N	No connection	
8	NC	N	No connection	
9	K1(LED-)	P	Cathode 1	
10	K2(LED-)	P	Cathode 2	
11	K3(LED-)	P	Cathode 3	
12	K4(LED-)	P	Cathode 4	
13	K5(LED-)	P	Cathode 5	
14	K6(LED-)	P	Cathode 6	

Table 3.2.2 Pin Assignment for Back Light Interface

I/O definition:

P----Anode/Cathode NC—No connection

4. Absolute Maximum Ratings

Item	Symbol	MIN	MAX	Unit	Remark
Power Voltage	VCC	-0.3	5.0	V	
Input voltage	V _{LVDS}	-0.3	2	V	Note 1
Input voltage	V _{IN}	-0.3	5.0	V	Note 2
Operating Temperature	Top	-20	70	°C	
Storage Temperature	Tst	-30	80	°C	
Relative Humidity Note2	RH	--	≤95	%	Ta≤40°C
		--	≤85	%	40°C < Ta≤50°C
		--	≤55	%	50°C < Ta≤60°C
		--	≤36	%	60°C < Ta≤70°C
		--	≤24	%	70°C < Ta≤80°C
Absolute Humidity	AH	--	≤70	g/m ³	Ta > 70°C


Table 4.1 Absolute Maximum Ratings

Note1: LVDS voltage include DA0+/-,DA1+/-,DA2+/-, DA3+/-,CLKA+/-, CLKB+/-,DB0+/-,DB1+/-,DB2+/-,DB3+/-;

Note2: Input voltage includes STBYB;

Note3: Ta means the ambient temperature. It is necessary to limit the relative humidity to the specified temperature range. Condensation on the module is not allowed.

Note4: The absolute maximum rating values of this product are not allowed to be exceeded at any times. A module should be used with any of the absolute maximum ratings exceeded, the characteristics of the module may not be recovered, or in an extreme condition, the module may be permanently destroyed

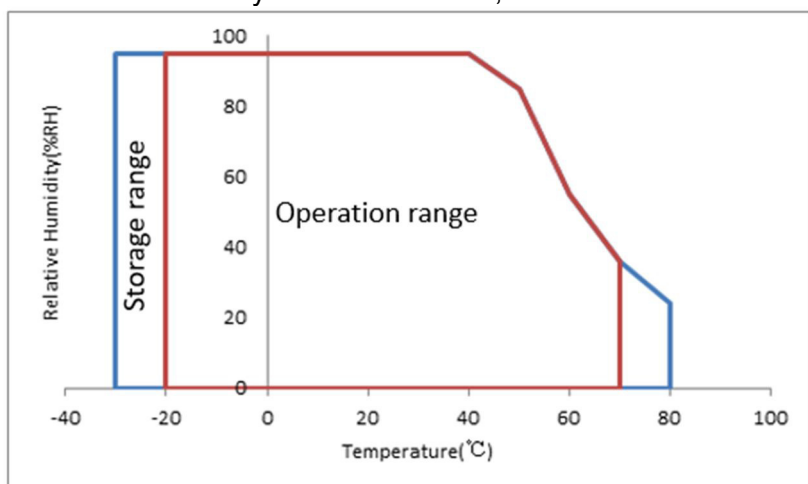

5. Electrical Characteristics


5.1 DC Characteristics for Panel Driving

Item	Symbol	MIN	TYP	MAX	Unit	Remark	
Supply Voltage	VCC	3.2	3.3	3.4	V		
Input Signal Voltage-STBYB	Low Level	VIL	0	--	0.3*VCC	V	Note1
	High Level	VIH	0.7*VCC	--	VCC	V	
Power Consumption	60Hz	P	--	1320	--	mW	White pattern
Differential input voltage	V _{ID}	0.1	-	(1.5-Rxvcm)*2	V		
Differential input common mode voltage	RxVCM	1.0	1.2	1.4	V		

Table 5.1 Operating Voltages

Note1: Input voltage include STBYB.

Note2: Power supply current and power consumption are just for reference.

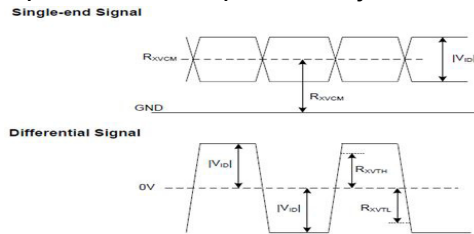


5.2 DC Characteristics for Backlight Driving

Item	Symbol	MIN	TYP	MAX	Unit	Remark
Forward Current	I _F	--	360	--	mA	54 LEDs (9 LED Serial,6 LED Parallel) Note1
Forward Current Voltage	V _F	24.3	26.1	29.7	V	
Backlight Power Consumption	WBL	8586	9720	10530	mW	
LED life time	--	30000	50000	-	Hrs	

Table 5.2.1 LED Backlight Characteristics

Note1: The figure below shows the connection of backlight LED.

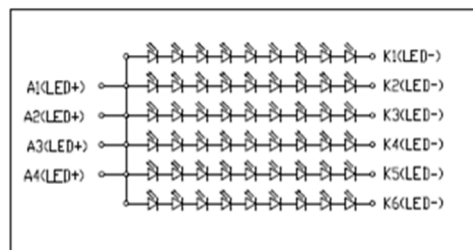

Backlight Circuit Diagram
9S-6P; I_F=60mA/LED

Note2: Optical performance should be evaluated at T_a=25°C only.

If LED is driven by high current, high ambient temperature & humidity condition, the life time of LED will be reduced. Operating life means brightness goes down to 50% initial brightness. Typical operating life time is estimated data.

5.3 Recommended Power ON/OFF Sequence

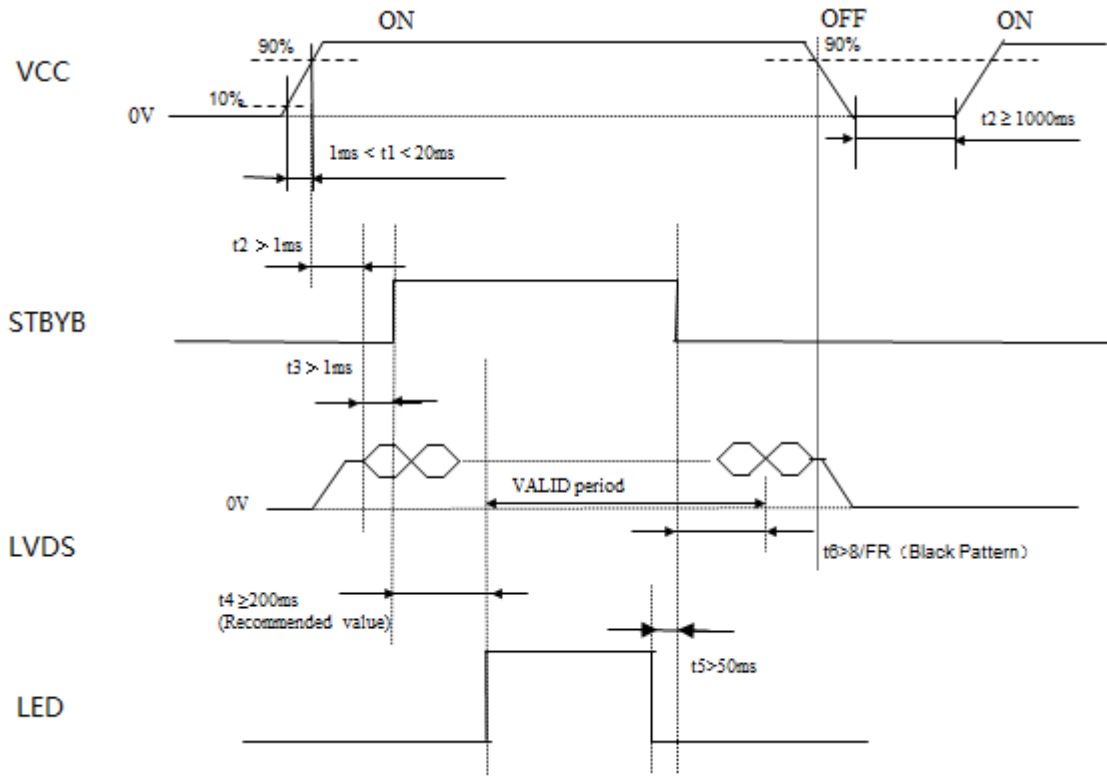


Figure 5.3.1 Power on/OFF sequence

Note1: The low level of these signals and analog powers are GND level.

Note2: All of the power and signals should be kept at GND level before power on.

If there are residual voltages on them, the LCD might not work properly.

Note3: The power on/off sequence is the first version. It will be updated when the design is fixed.

Note4: BL is the voltage applied to backlight. Keep it turned off until the display has stabilized.

5.4 LCD Module Block Diagram

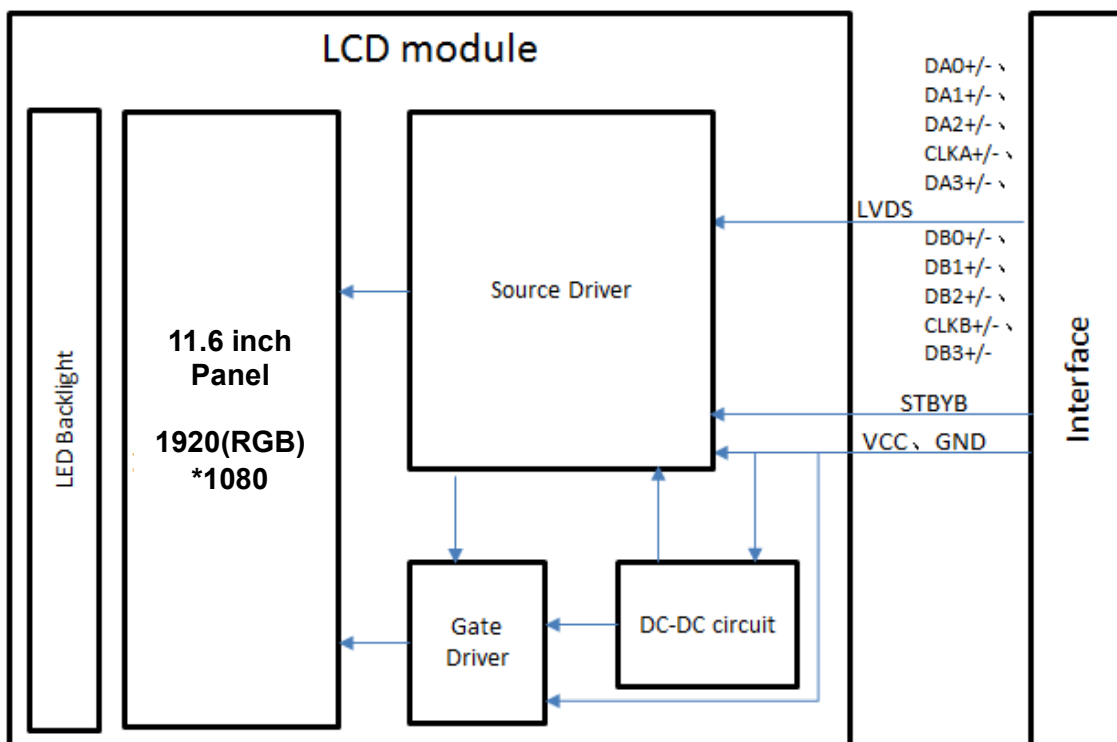


Figure 5.4 LCD Module Block Diagram

6. Timing Characteristics

6.1 AC characteristics

Parameter	Symbol	Min	Typ	Max	Unit	Remark
1 data bit time	UI	-	1/7	-	1/RXFCLK	
Position 1	Rspos1	-0.2	0	0.2	UI	
Position 2	Rspos2	0.8	1	1.2	UI	
Position 3	Rspos3	1.8	2	2.2	UI	
Position 4	Rspos4	2.8	3	3.2	UI	
Position 5	Rspos5	3.8	4	4.2	UI	
Position 6	Rspos6	4.8	5	5.2	UI	
Position 7	Rspos7	5.8	6	6.2	UI	
Input data skew margin	T_{RSKM}	-	-	0.2	UI	VID =100mV RXVCM=1.2V RXFCLK=75MHz
Clock high time	T_{LVCH}	-	$4/(7 \cdot RXFCLK)$	-	ns	
Clock low time	T_{LVCL}	-	$3/(7 \cdot RXFCLK)$	-	ns	

Table 6.1.1 Input Setup Timing Parameters Requirement

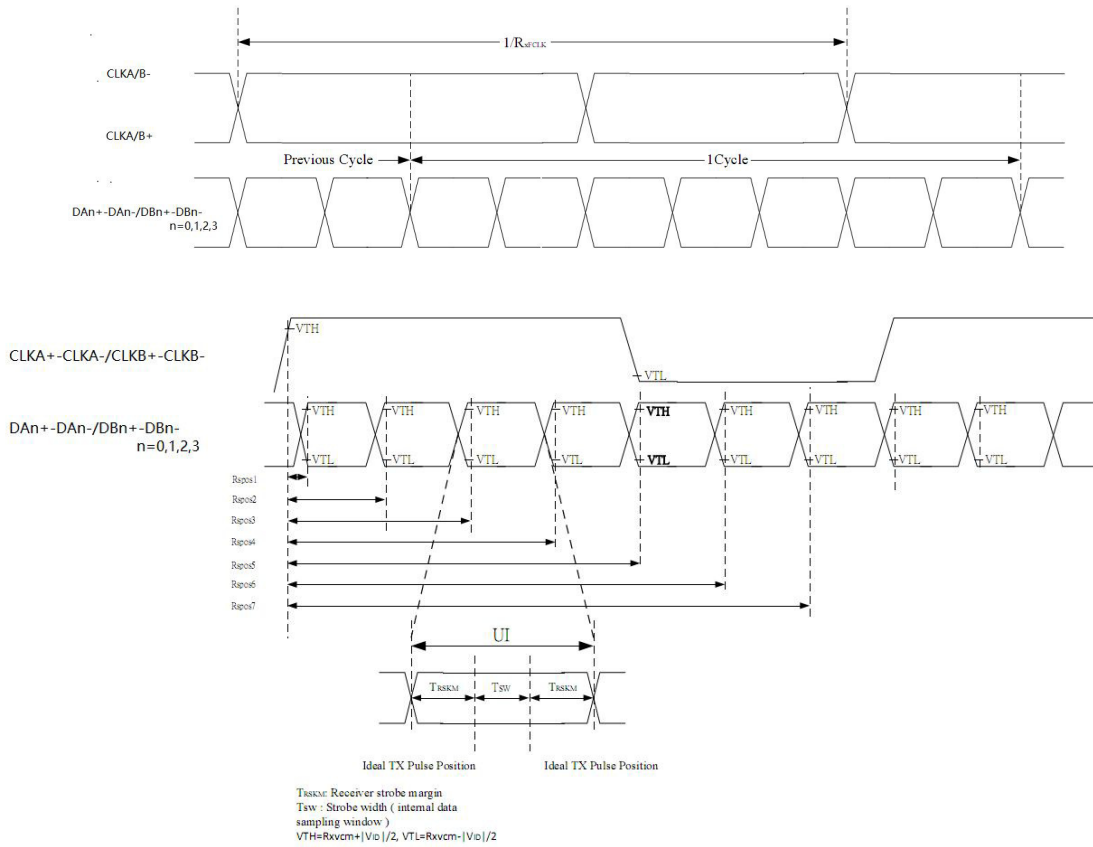


Figure 6.1.1 Clock and Data Input Timing Diagram

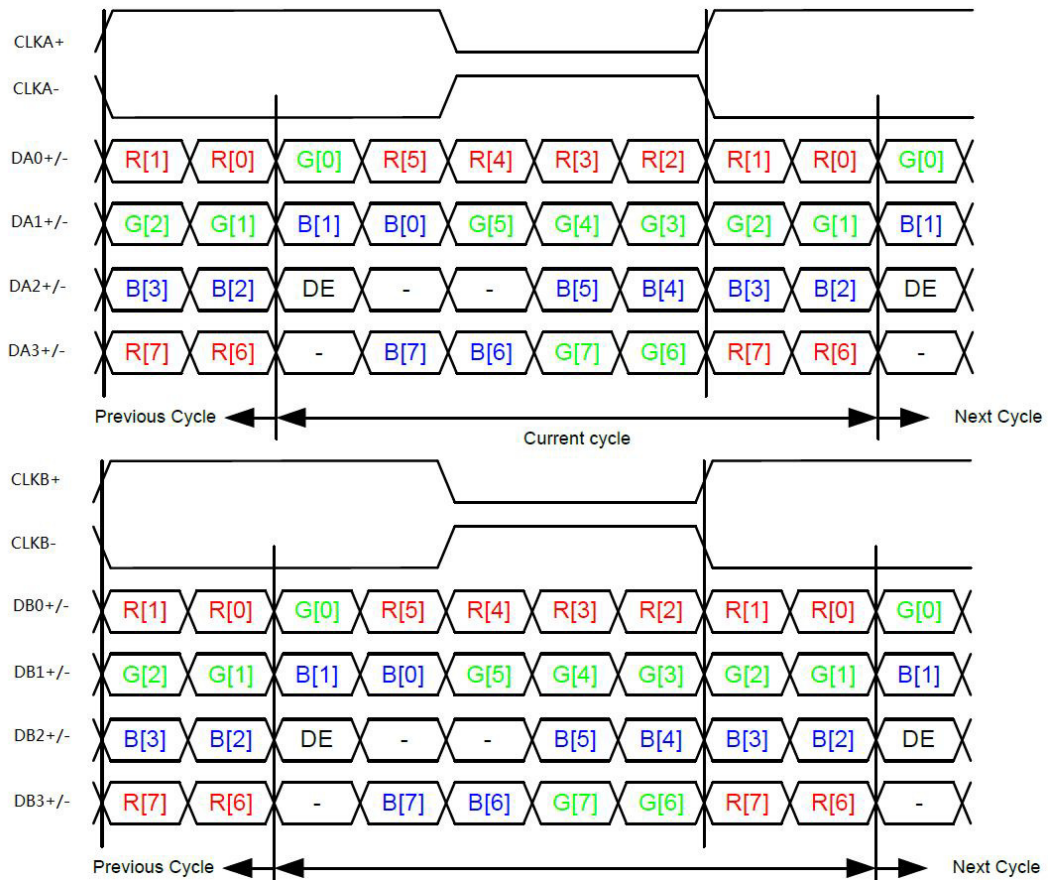


Figure 6.1.2 2-port LVDS signals, VESA format


6.2 Data Input Timing Parameter Setting

Parameter	Symbol	Min	Typ	Max	Unit	Note
DCLK Frequency	F_{DLCK}	66.46	66.85	83.42	MHz	
Horizontal valid data	t_{hd}	960			DCLK	
1 Horizontal Line	t_h	1020	1024	1150	DCLK	
Vertical valid data	t_{vd}	1080			H	
1 Vertical field	t_v	1086	1088	1209	H	If thermal enable, V-blank>5line+315us
Frame rate	FR	60			HZ	

Table 6.2 Data Input Timing Parameters

6.3 DE Mode Timing Diagram

Horizontal

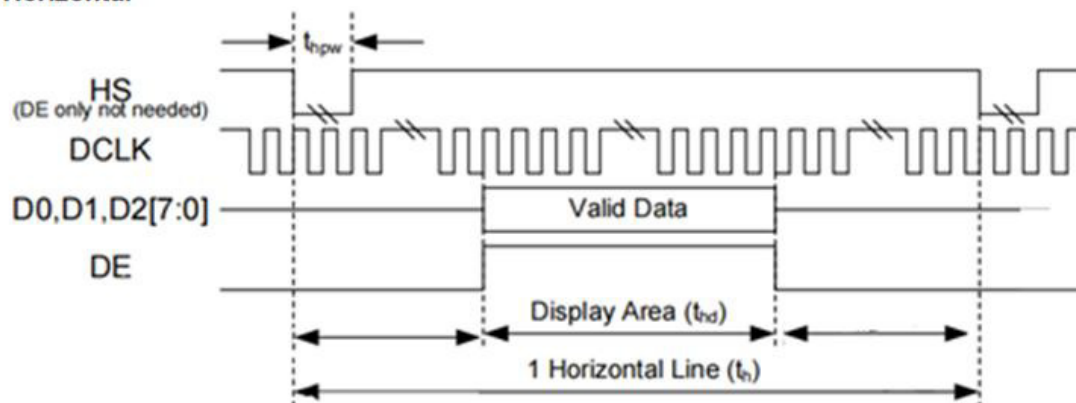

Vertical

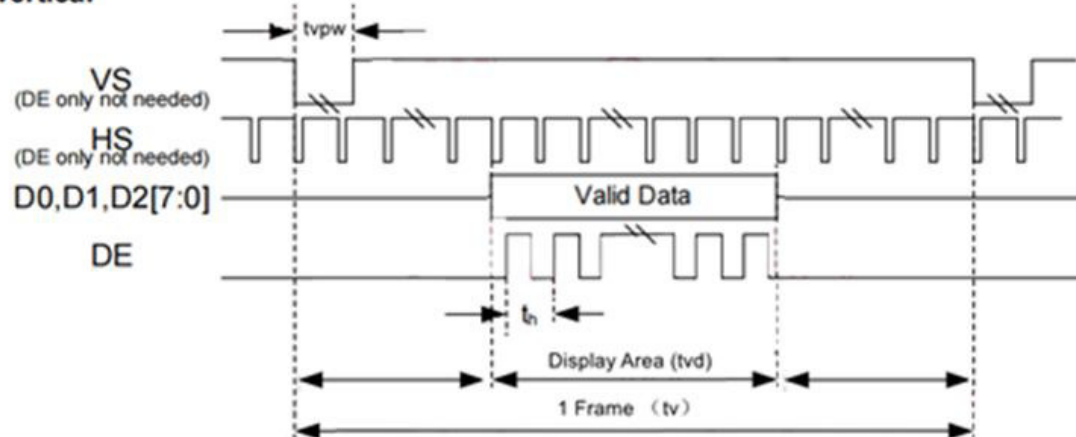


Figure 6.3 Data Input Timing Diagram Under DE Mode

7. Optical Characteristics

Item	Symbol	Condition	Min	Typ	Max	Unit	Remark
View Angles	θT	$CR \geq 10$	70	88	-	degree	Note2,3
	θB		70	88	-		
	θL		70	88	-		
	θR		70	88	-		
Contrast Ratio	CR	$\theta=0^\circ$	700	900			Note 3
Response Time	T_{ON}	25°C	-	25	35	ms	Note 4
	T_{OFF}						
Chromaticity	White	Backlight is on	x	0.260	0.310	0.360	Note 1,5
			y	0.290	0.340	0.390	
	Red		x	0.581	0.631	0.681	Note 1,5
			y	0.287	0.337	0.387	
	Green		x	0.255	0.305	0.355	Note 1,5
			y	0.568	0.618	0.668	
	Blue		x	0.101	0.151	0.201	Note 1,5
			y	0.006	0.056	0.106	
Uniformity	U		70	80	-	%	Note 6
NTSC	-		65	70	-	%	Note 5
Luminance	L		800	1000	-	cd/m ²	Note 7

Table 7 Optical Parameters

Test Conditions:

1. $I_F=360mA$, the ambient temperature is 25°C.
2. The test systems refer to Note 1 and Note2.

Note1: Definition of optical measurement system.

The optical characteristics should be measured in dark room. After 5 Minutes operation, the optical characteristics are measured at the center point of the LCD screen.

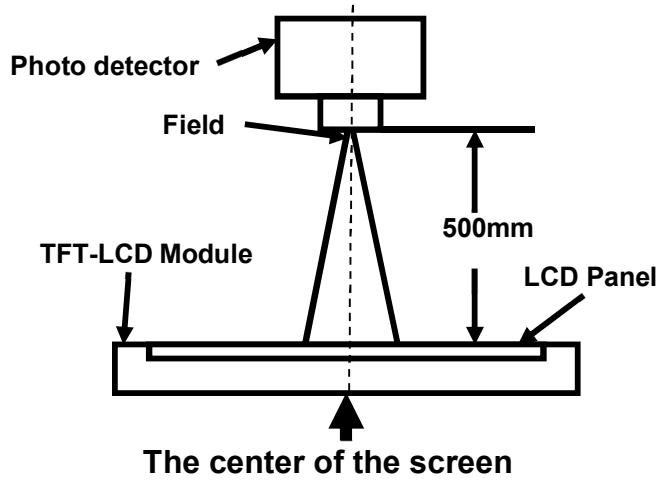


Fig1. Measurement Set Up

Note2: Definition of viewing angle range and measurement system. Viewing angle is measured at the center point of the LCD .

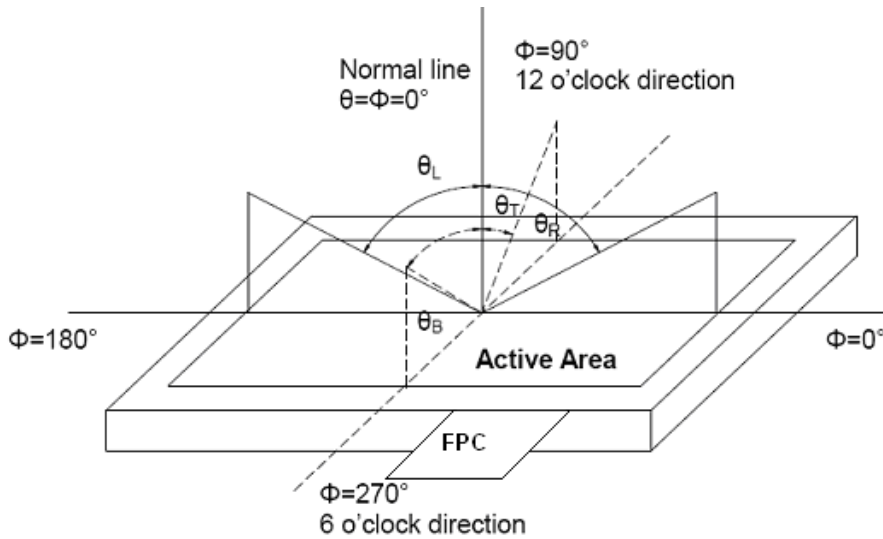


Fig2. Measurement viewing angle

Note3: Definition of contrast ratio

$$\text{Contrast ratio (CR)} = \frac{\text{Luminance measured when LCD is on the "White" state}}{\text{Luminance measured when LCD is on the "Black" state}}$$

Note4: Definition of Response time

the response time is defined as the LCD optical switching time interval between “White” state and “Black” state. Rise time (T_r) is the time between photo detector output intensity changed from 10% to 90%. And fall time (T_f) is the time between photo detector output intensity changed from 90% to 10%.

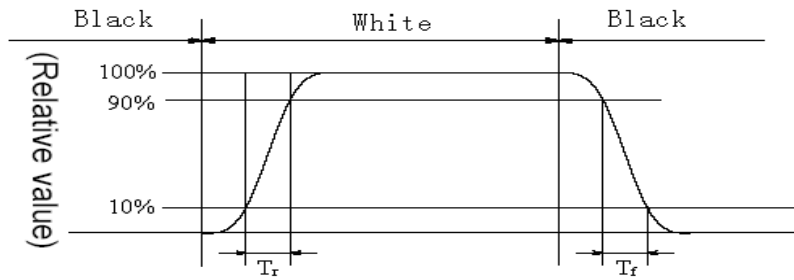


Fig4. Response Time Testing(SFT)

Note5: Definition of color chromaticity (CIE1931)

Color coordinates measured at center point of LCD.

Note6: Definition of Luminance Uniformity

Active area is divided into 9 measuring areas (Refer Fig.5). Every measuring point is placed at the center of each measuring area.

$$\text{Luminance Uniformity (U)} = L_{\min} / L_{\max}$$

L_{\max} : The measured Maximum luminance of all measurement position.

L_{\min} : The measured Minimum luminance of all measurement position.

L-----Active area length; W----- Active area width

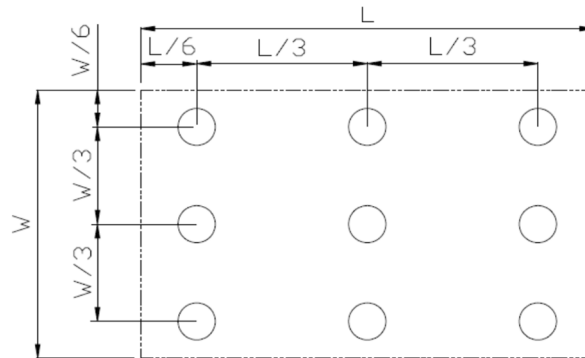


Fig5. Luminance Uniformity Measurement Locations (9 points)

Note7: Definition of Luminance:

Measure the luminance of white state at center point.

8. Reliability Test

No	Test Item	Condition	Remarks
1	High Temperature Operation	+70℃,240H	IEC60068-2-1:2007 GB/T 2423.2-2008
2	Low Temperature Operation	-20℃,240H	IEC60068-2-1:2007 GB/T 2423.1-2008
3	High Temperature Storage	+80℃,240H	IEC60068-2-1:2007 GB/T 2423.2-2008
4	Low Temperature Storage	-30℃,240H	IEC60068-2-1:2007 GB/T 2423.1-2008
5	Temperature & Humidity Operation	60℃,90%RH,240 hours	IEC60068-2-78 :2001 GB/T 2423.3-2016
6	Thermal Shock (non-operation)	-30℃,30min~80℃,30min, change time:5min,100cycle	Start with cold temperature, End with high temperature, IEC60068-2-14:1984, GB/T 2423.22-2012-Na
7	ESD	C=150pF, R=330Ω,5point/panel Air: ±8kv,5times; Contact: ±4kv,5times; (Environment:15℃~35℃, 30%~60%,86Kpa~106Kpa)	IEC61000-4-2:2001 GB/T 17626.2-2018
8	Vibration (non-operation)	Frequency range:10~55Hz Stroke:1.5mm Sweep:10Hz~55Hz~10Hz 2h for x, y, z(total 6h)	IEC60068-2-6:1982 GB/T 2423.10-2019
9	Shock (non-operation)	Half Sine Wave 60G ,6ms, ±X, ±Y, ±Z 3times for each direction	IEC60068-2-27:1987 GB/T 2423.5-2019
10	Package Drop Test	Height: 60 cm,1 corner, 3edges, 6 surfaces Note::X > 10Kg:60cm ; ≤10Kg:80cm	GB/T 4857.5-1992

Table 8 RA test condition

Note1: Temperature is the ambient temperature of sample


Note2: Before cosmetic and function test, the product must have enough recovery time, at least 24hours at room temperature.



Note3: In the standard condition, there shall be no practical problem that may affect the display function. After the reliability test, the product's function only be guaranteed, but not for all of the cosmetic specification.

10. Packing Instruction


No	Item	Model (Material)	Dimensions(mm)	Unit Weight(Kg)	Q'ty	Remark
1	LCM module	P1160FHF1MA01	273.50*166.50*7.80	0.53	14	
2	Partition_1	Corrugated Paper	513.00*413.00*240	1.42	1	
3	Anti-static Bubble Bag	PE	270*295	0.01	14	Anti-static
4	Dust-Proof Bag	PE	700*545	0.06	1	
5	Partition_2	Corrugated Paper	513*413	0.1	1	
6	Corrugated Bar	Corrugated Paper	367*305*48	0.08	1	
7	Beauty-grain	Tape	30*10	0.00003	42	
8	Carton	Corrugated Paper	530*430*274	0.76	1	
9	Label	Label	100*52	0.000345	1	
10	Total weight	9.98±5%Kg				

Total LCM quantity in Carton: 14

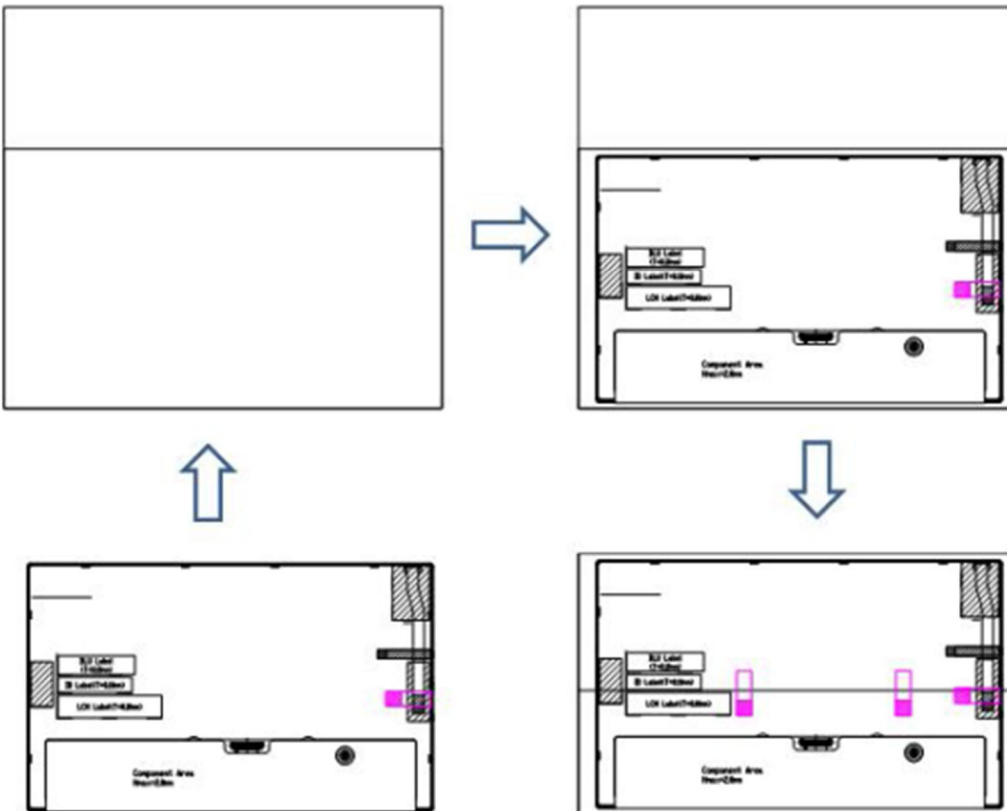

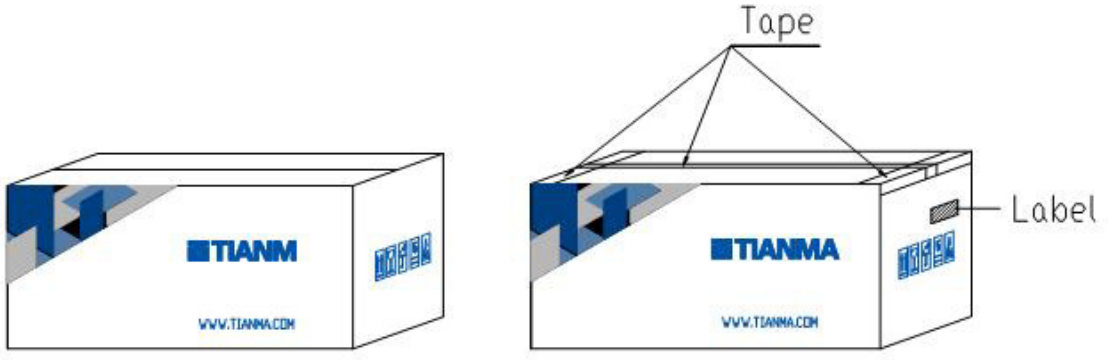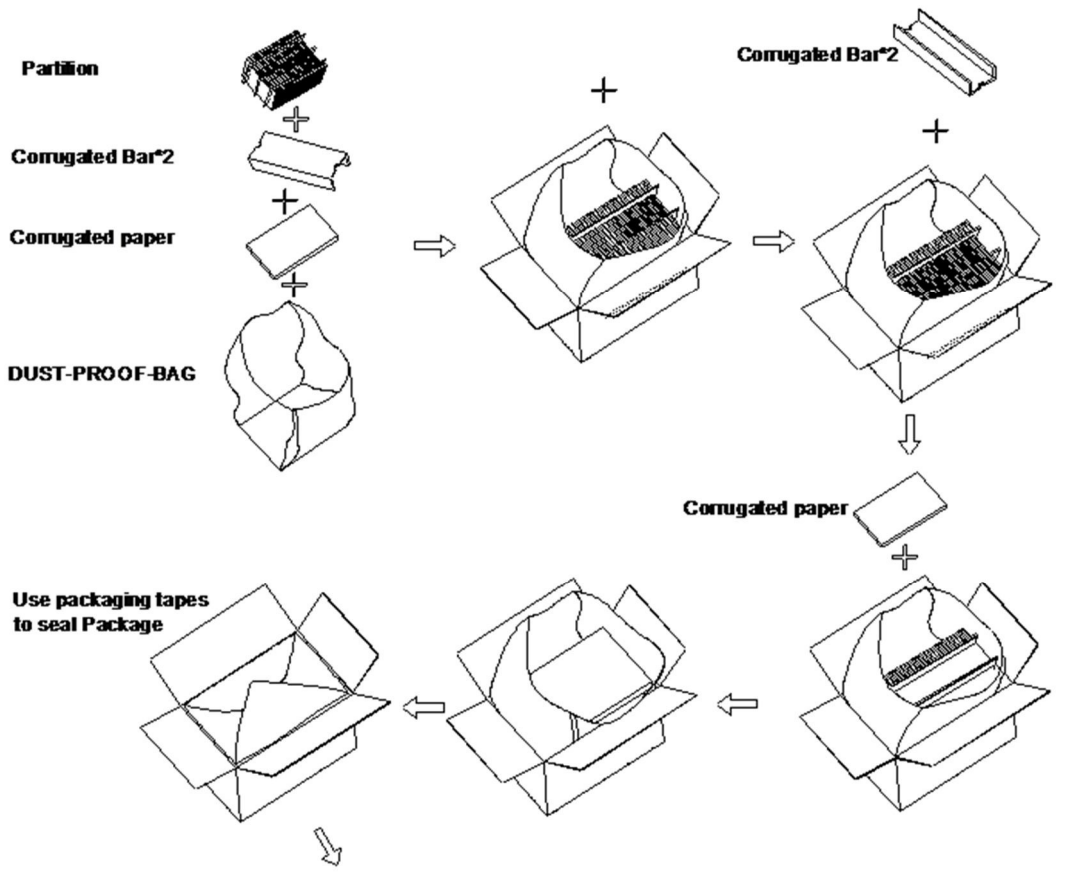

Stock method (2*2*5 layer)

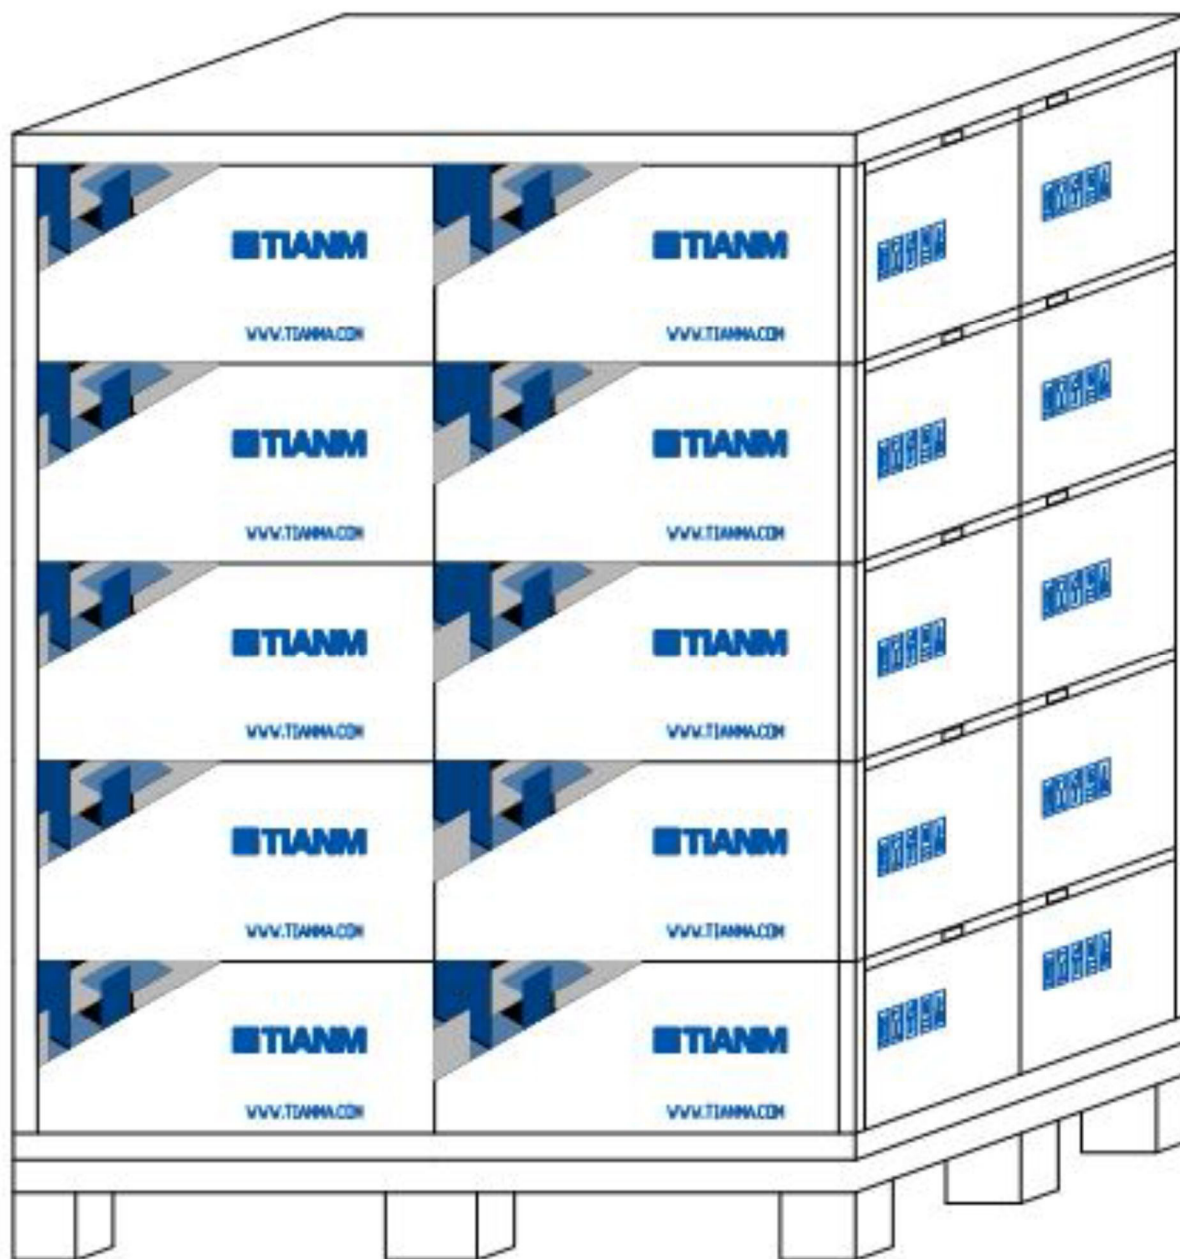

11. Precautions for Use of LCD Modules

11.1 Handling Precautions

- (1) The display panel is made of glass. Do not subject it to mechanical shock by dropping it, etc.
- (2) If the display panel is damaged and the liquid crystal fluid inside it leaks out be sure not to get any in your mouth. If the fluid comes into contact with your skin or clothes promptly wash it off using soap and water.
- (3) Do not apply excessive force to the display surface or the bezel since this may cause the color tone to vary.
- (4) The polarizer covering the display surface of the LCD module is soft and easily scratched. Handle the polarizer carefully.
- (5) If the display surface is contaminated, breathe on the surface and gently wipe it with a soft dry cloth. If it is still not completely clear use a moist cloth with one of the following solvents:

- Isopropyl alcohol
- Ethyl alcohol

Solvents other than those mentioned above may damage the polarizer. Specifically, do not use the following:

- Water
- Ketone
- Aromatic solvents

- (6) Do not disassemble the LCD Module.
- (7) If powered off, do not apply the input signals.
- (8) To prevent destruction of the module by static electricity, be careful to maintain an optimum work environment.
- (9) Be sure to ground your body when handling the LCD Modules.
- (10) Tools used for assembly, must be properly grounded.
- (11) To reduce the amount of static electricity generated, do not conduct assembly or other work under very low humidity conditions.
- (12) The LCD Module is covered with a film to protect the display surface, remove film slowly under the ionizer.

11.2 Storage precautions

- (1) When storing the LCD modules avoid exposure to direct sunlight or to the light of fluorescent lamps.
- (2) The LCD modules should be stored within the rated storage temperature range. The recommend condition is: Temperature: 0 ~ 35 °C at normal humidity.
- (3) The LCD modules should be stored in a room without acid, alkali or other harmful gas.

11.3 Transportation Precautions

The LCD modules should not be dropped or subject to violent mechanical shock during transportation. Also they should avoid excessive pressure, water, high humidity and direct sunlight.

11.4 Screen saver Precautions

Not display the fixed pattern for a long time. Use a screen saver, if the fixed pattern is displayed on the screen

11.5 Safety Precautions

- (1) When you waste damaged or unnecessary LCDs, it is recommended to crush LCDs into pieces and wash them off with solvents such as acetone and ethanol, which should later be burned
- (2) Be sure to turn off the power supply when inserting or disconnecting the LED backlight cable.
- (3) LED driver should be designed to limit or stop its function when over current is detected on the LED.



ALL TECHNOLOGIES. ALL COMPETENCIES. ONE SPECIALIST.



DATA MODUL AG
Landsberger Straße 322
DE-80687 Munich
Phone: +49-89-56017-0

DATA MODUL WEIKERSHEIM GMBH
Lindenstraße 8
DE-97990 Weikersheim
Phone: +49-7934-101-0

